DWG NO. RE-2308-NL

REV	ECO NO.	DATE	BY	APP'D
F	"•" is added on side PER ECO 006	7/02/07	KL	
G	add tolerance PER ECO 007	3/11/08	KL	

RoHS Compliant

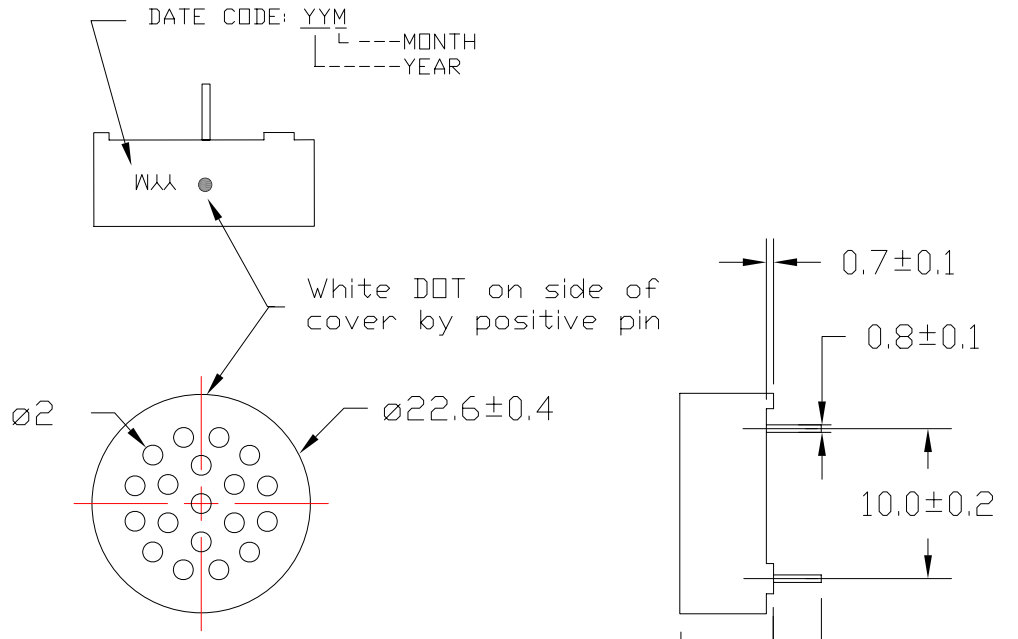

NOTE:
Lead Free Testing Result
Black plastic housing – 7ppm
Pin – 74ppm
Wire and solder – 20ppm

Tolerance:
x. ±0.4
x.x ±0.25
x.xx ±0.1

UNIT: mm

ELECTRICL CHARACTERISICS

Rated Impedance (Ohms)	8±15%
Rated Power (W)	0.3
Max. Power Input (W)	0.5
Resonant Frequency (Hz)	1400±20%
Effective Freq. Range	890~11k Hz
Sound Pressure Level (dB)	84±3
Magnet Type	Enclosed
Magnet Size	ø10x1.5

CONFIDENTIAL

© Copyright 2008 Regal Electronics, Inc. This drawing is the property of Regal Electronics and contains confidential information, trade secret information and/or know-how which is the property of Regal Electronics. By accepting this drawing, the recipient agrees not to provide, or otherwise make available, the drawing or any information or know-how embodied therein, to any third party without prior written authorization.

REGAL ELECTRONICS INC.

DRAWN: KIM	DATE 5/27/02	TITLE: PCB Mount SPEAKER
CHECKED:	DATE	
ENGINEER:	DATE	
APPROVED:	DATE	
APPROVED:	DATE	SIZE B / DRAWING NO. RE-2308-NL / REV G
APPROVED:	DATE	SCALE: NONE / SHEET 1 OF 1

C-RE-2308-NL