


GSM/GPRS modules | 2JMAS01


reference

2JMAS01


mounting position	--
nominal impedance	50 Ohms
frequency	AMPS 824-894MHz/GSM 900, 1800 Mhz DCS 1900 Mhz/UMTS 2,1GHz/Bluetooth 2,4GHz/5GHz, 5.8GHz
polarization	VERTICAL
gain	0 dBi
vswr	900MHz <1,5/1 1800MHz <1,2/1 2100MHz < 1,5/1 2400MHz < 2,0/1 5GHz, 5.8GHz <2,0/1
power handling	25W
cable	On request
connector	On request
size	42x16x1.6 mm
working temperature	-40°C to +85°C

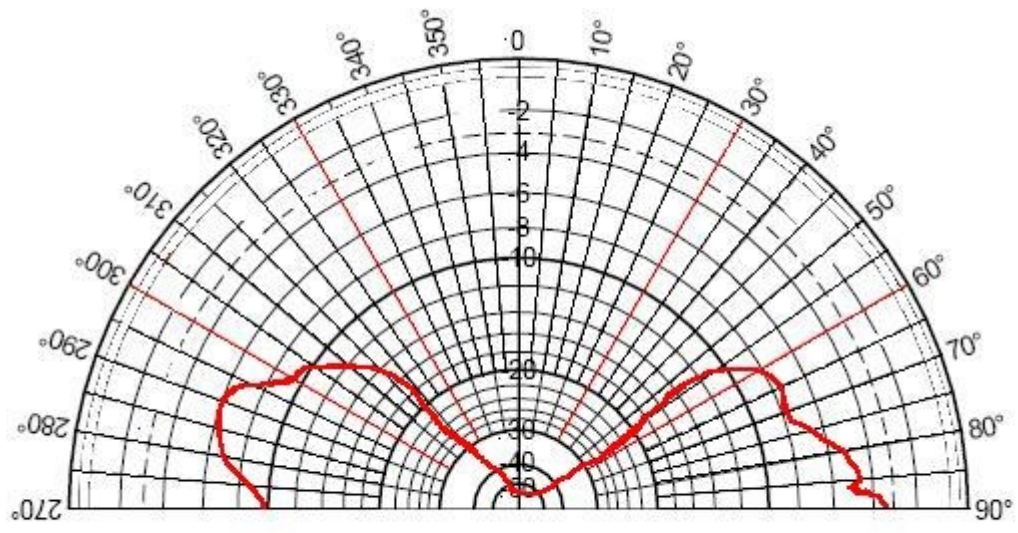


Elevation Pattern (Z, Y or H-Plane)

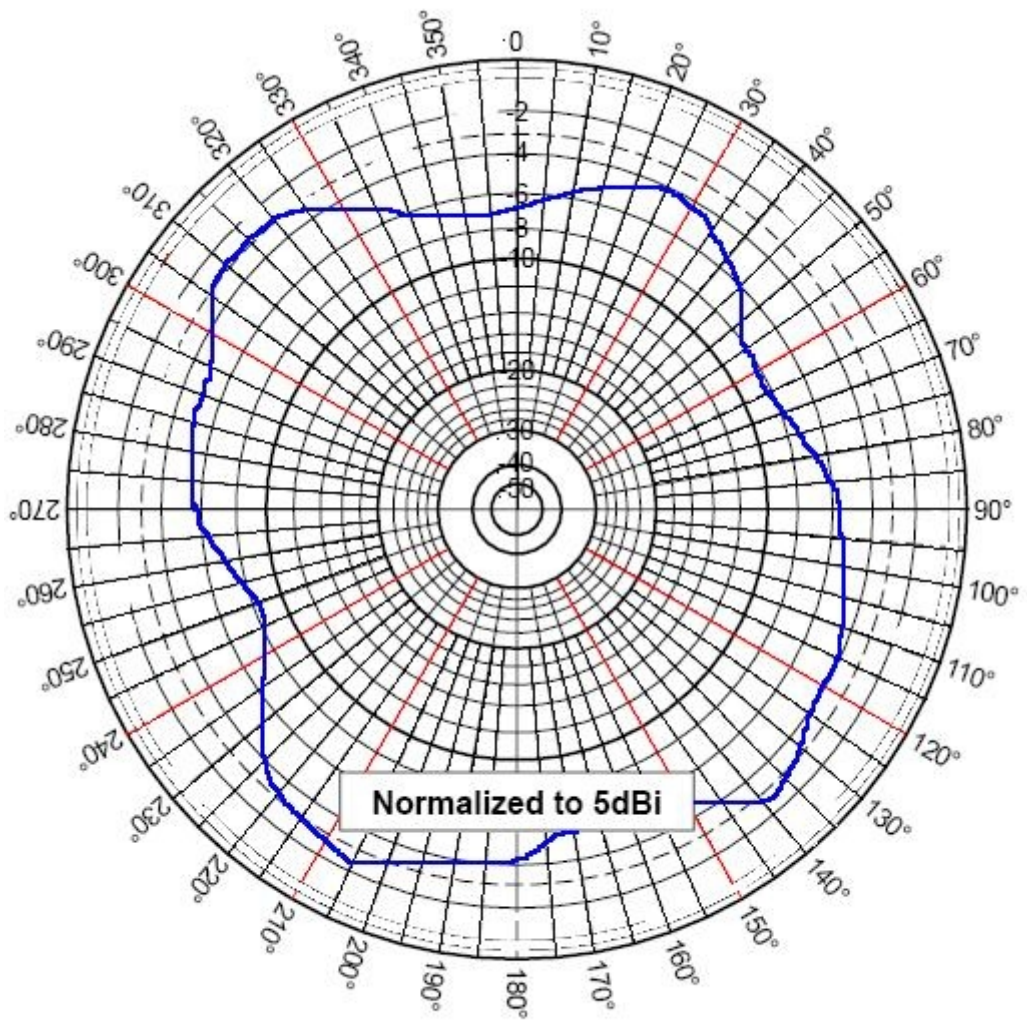

Azimuthal Pattern (X, Y or E-Plane)

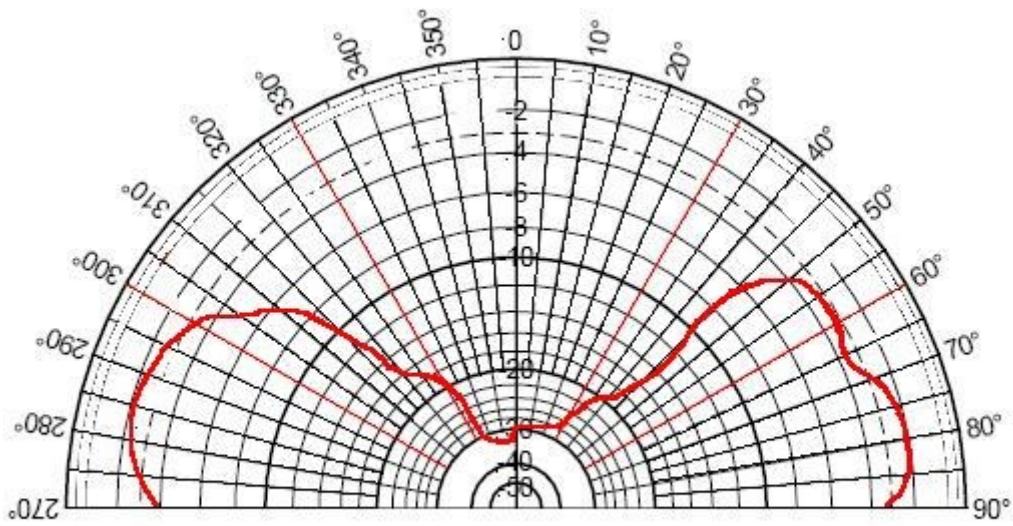

Elevation Pattern (Z, Y or H-Plane)

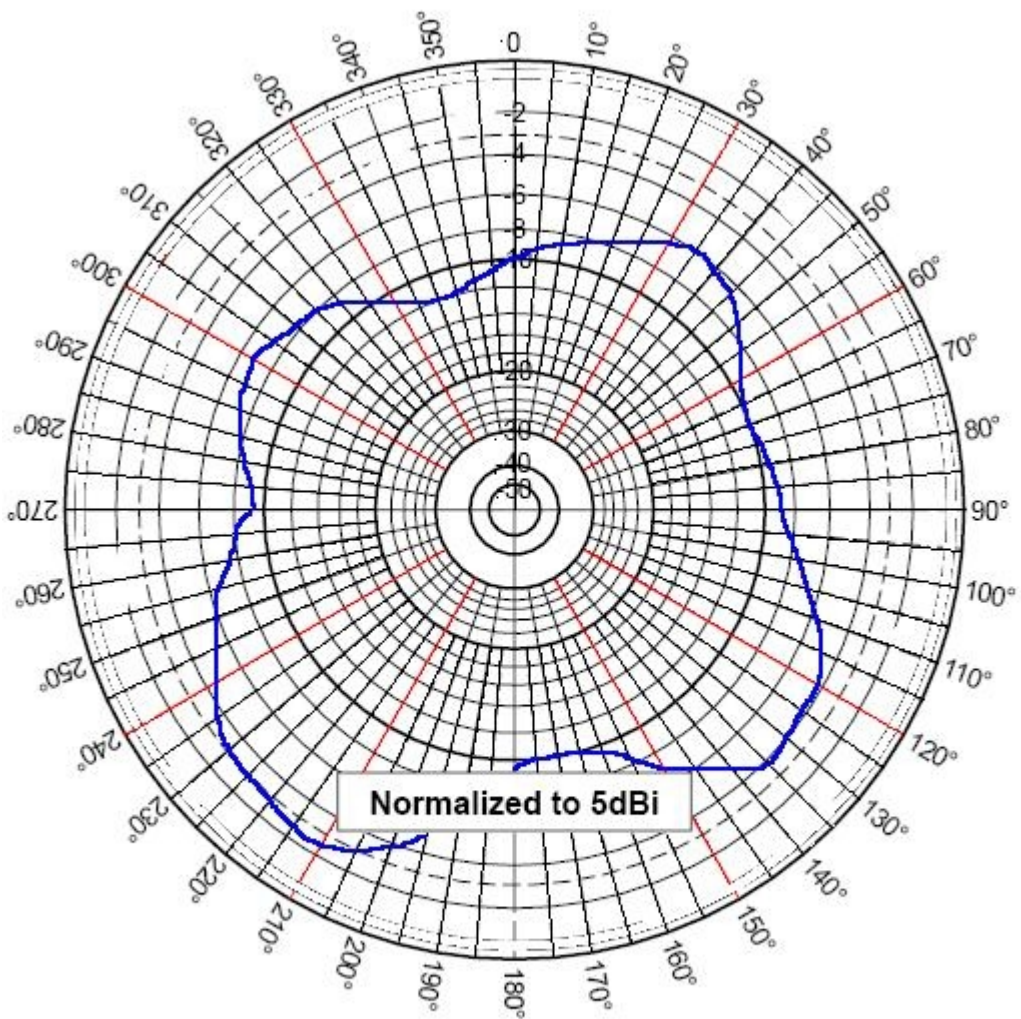

Normalized to 5dBi

Azimuthal Pattern (X, Y or E-Plane)