



telematic antenna | 2J020

reference

2J020

frequency

**AMPS / GSM900 / GSM1800
UMTS2100 / Bluetooth2400**

vswr

<2:1

impedance

50 Ohms

polarisation

vertical

gain

2.2 dBi

connector



SMA Male

working temperature


-40°C to +85°C

size

55mm x 9.65mm

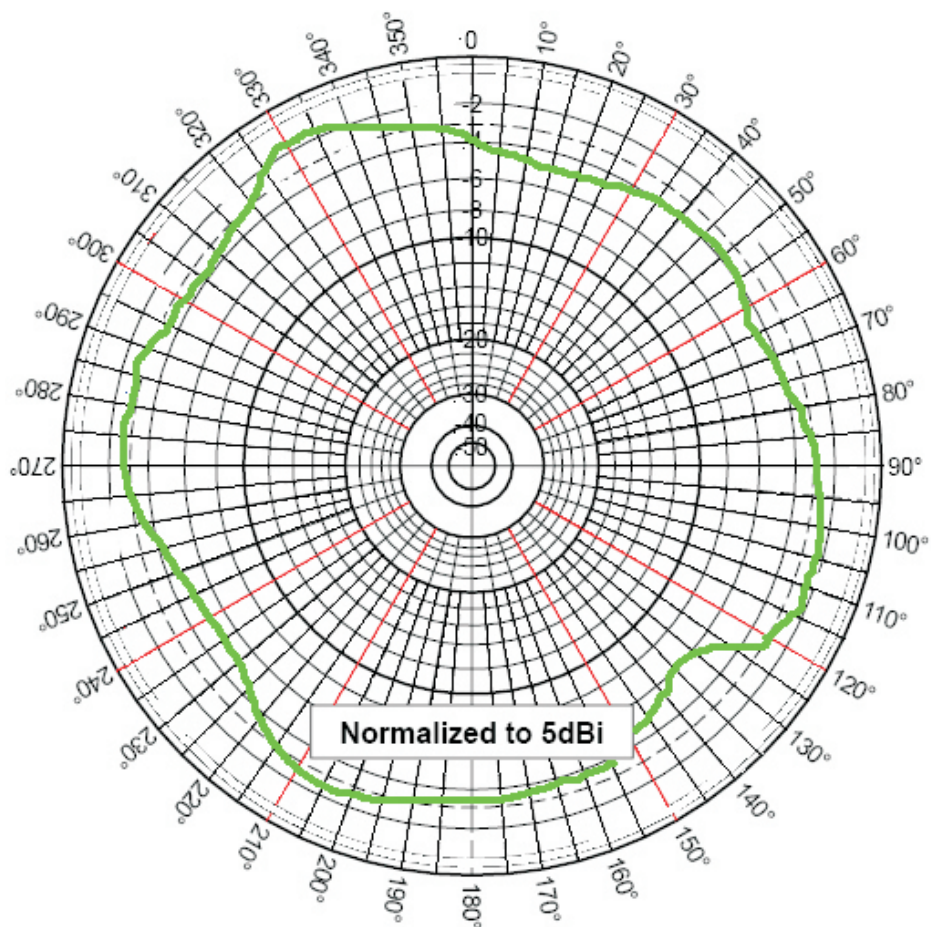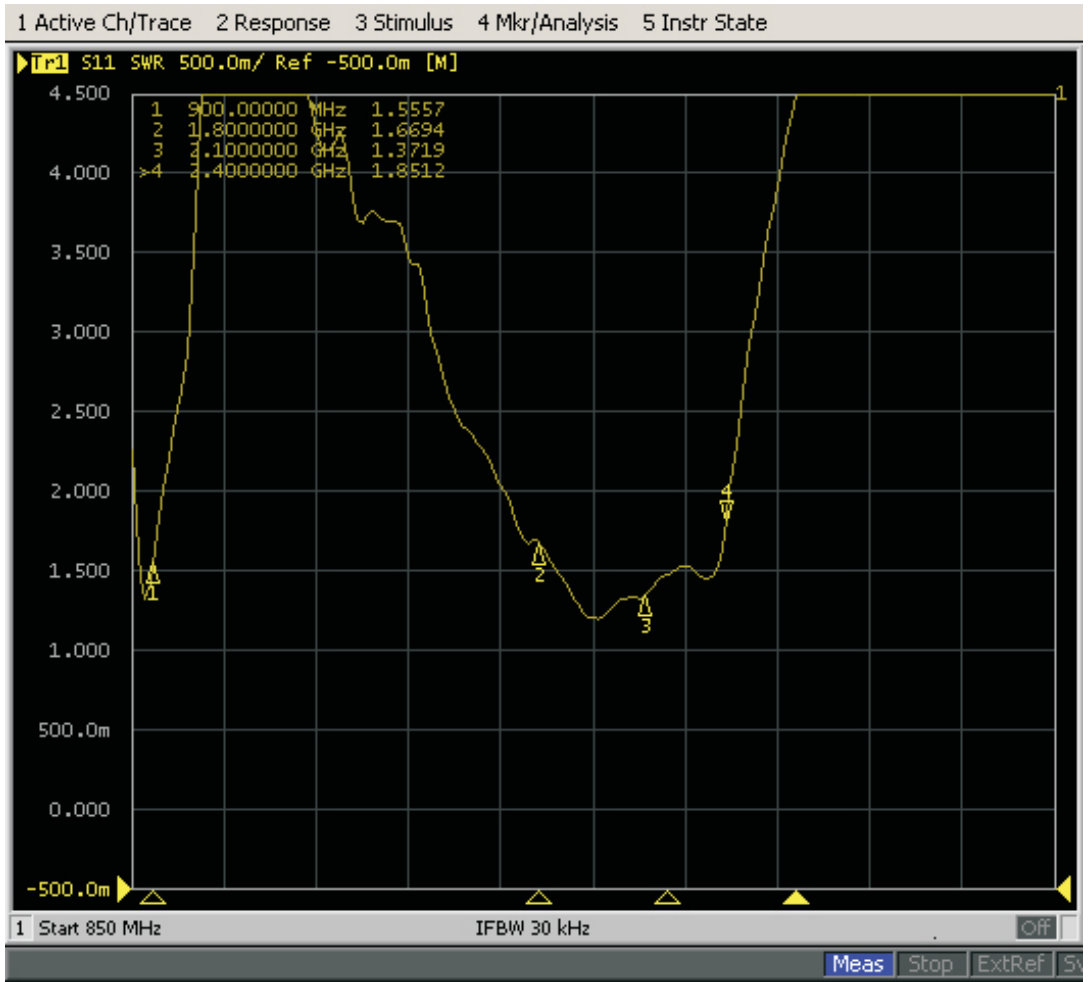

Azimuthal Pattern (X, Y or E-Plane)

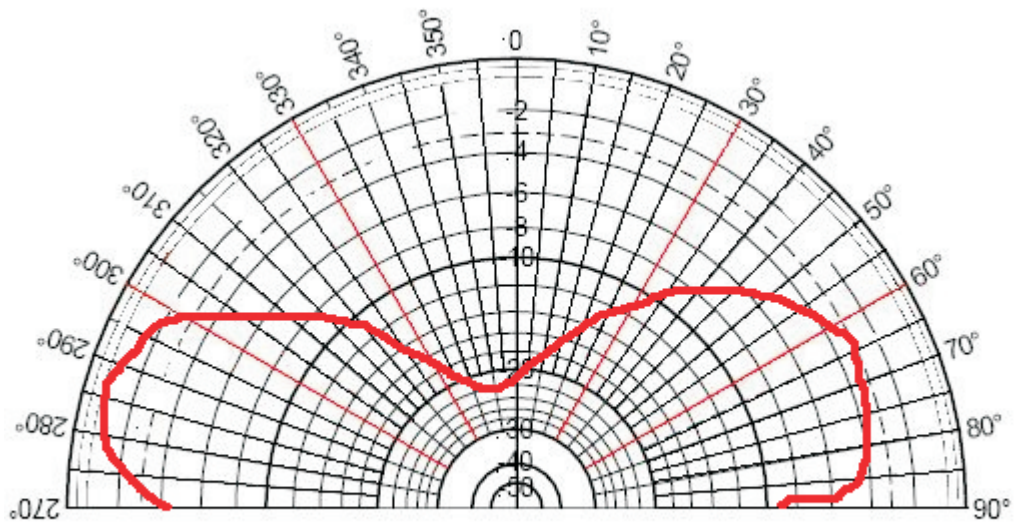

Elevation Pattern (Z, Y or H-Plane)