



reference

# 2JMAS04

frequency	<b>GSM 900, 1800 MHz</b>
nominal impedance	<b>50 Ohms</b>
polarization	<b>VERTICAL</b>
gain	<b>0 dBi</b>
vswr	<b>&lt;1,5/1</b>
power handling	<b>25W</b>
cable	<b>On request</b>
connector	<b>On request</b>
size	<b>42x15x1.6 mm</b>
working temperature	<b>-40°C to +85°C</b>

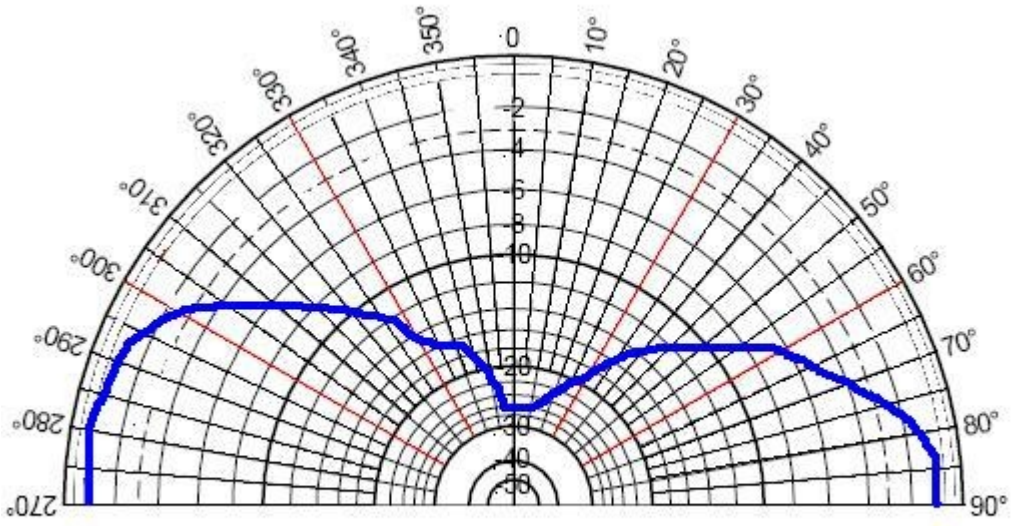

Elevation Pattern (Z, Y or H-Plane)

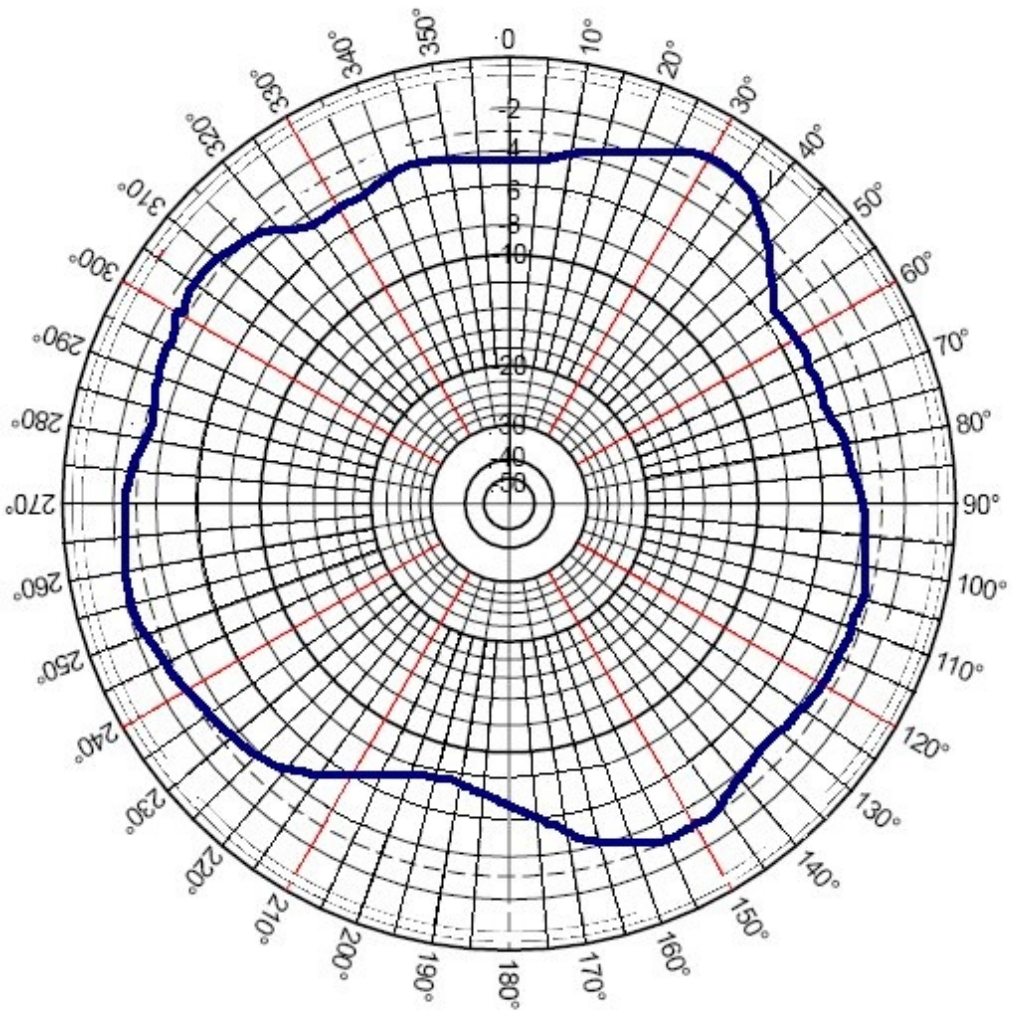

Azimuthal Pattern (X, Y or E-Plane)