



## reference

## 2J064

frequency

**AMPS / GSM900 / GSM1800  
UMTS2100 / Bluetooth2400**

vswr

**<2:1**

impedance

**50 Ohms**

polarisation

**vertical**

gain

**2.2 dBi**

connector



**TNC Male**

working temperature


**-40°C to +85°C**

size

**61mm x 13mm**

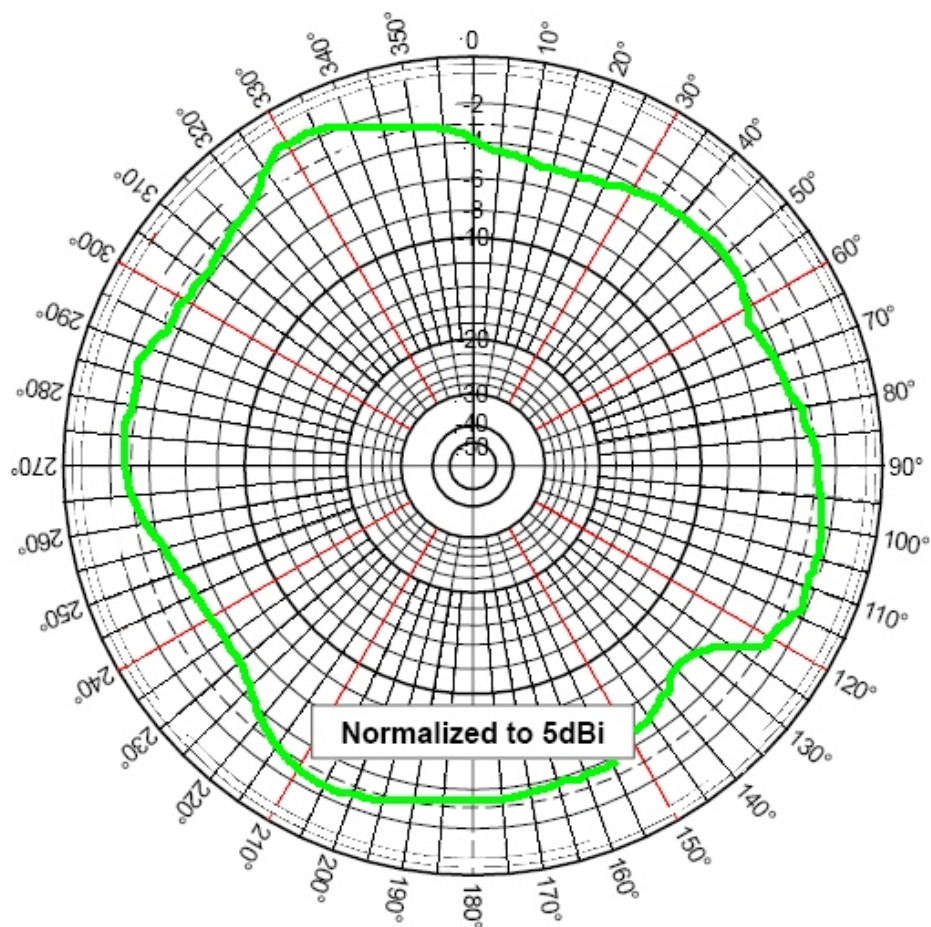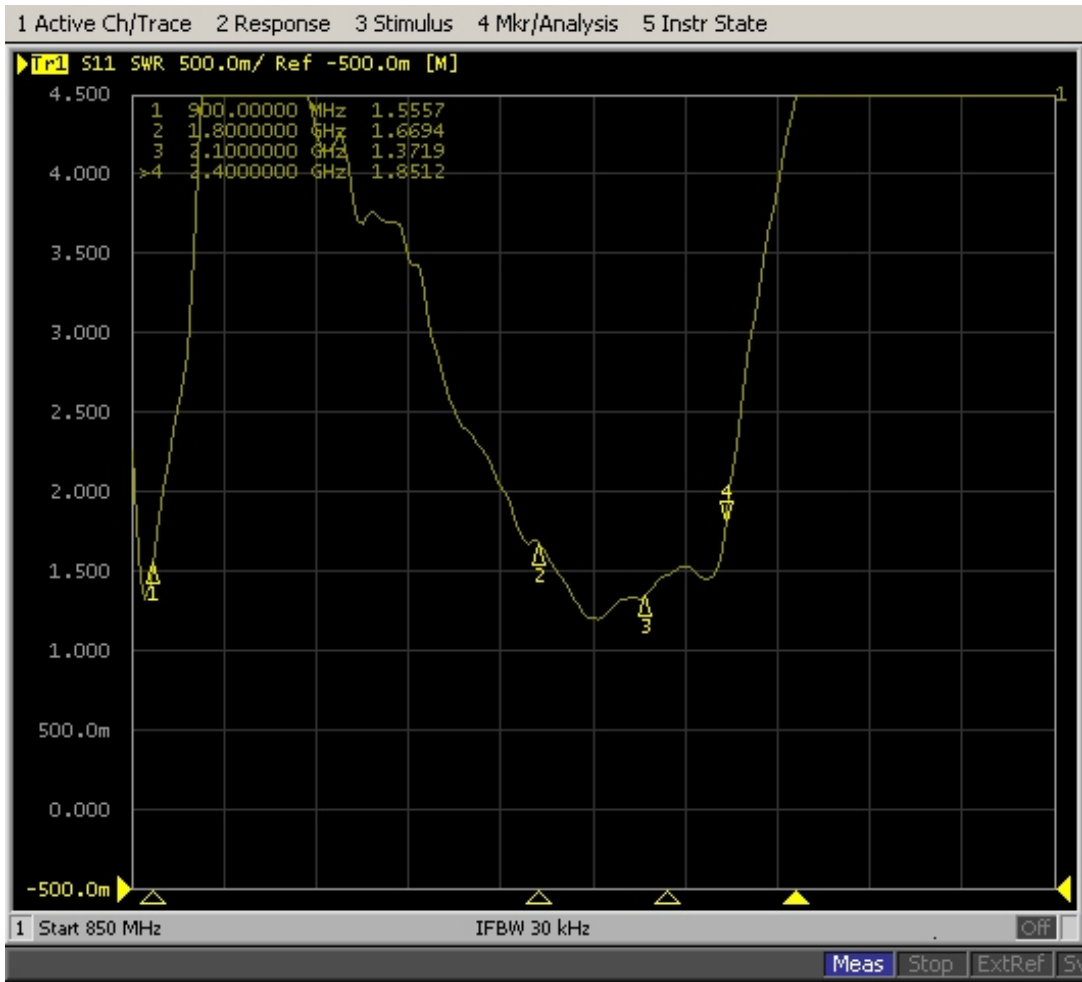

Azimuthal Pattern (X, Y or E-Plane)

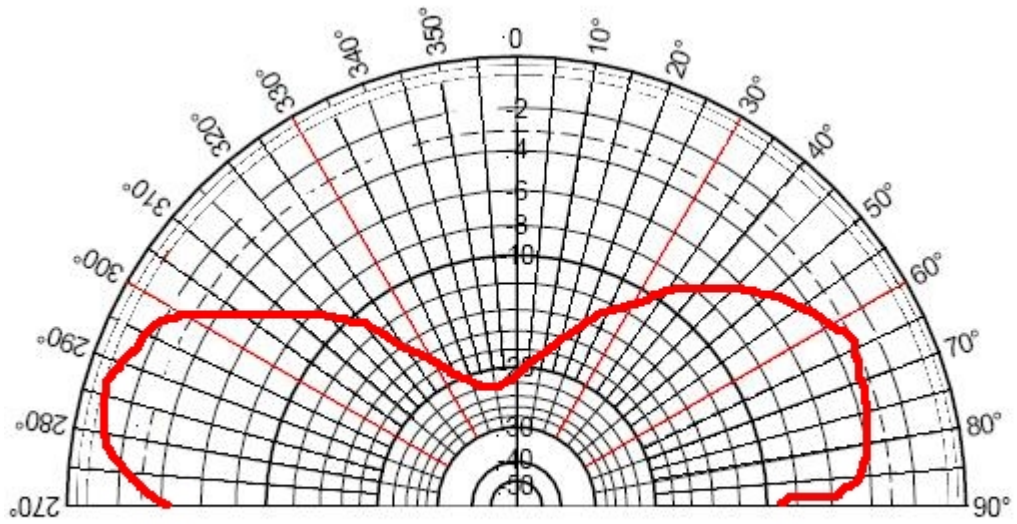

Elevation Pattern (Z, Y or H-Plane)