



reference

2J426

mounting position

VSWR

frequency

nominal impedance

voltage

current

LNA gain

polarization

cable

cable length

connector

housing size

working temperature

**DASH BOARD, WINDSCREEN,
ANY METALIC SURFACE**

<2:1

**AMPS/GSM/PCN/
DCS/UMTS/WIFI/GPS**

50 Ohms

125 mW

2,8V to 5,5V

15mA-25mA

27dB

horizontal

3 x RG174


upon request

upon request


77 mm x 34 mm x 13,5mm

-40°C to +85°C


GSM900

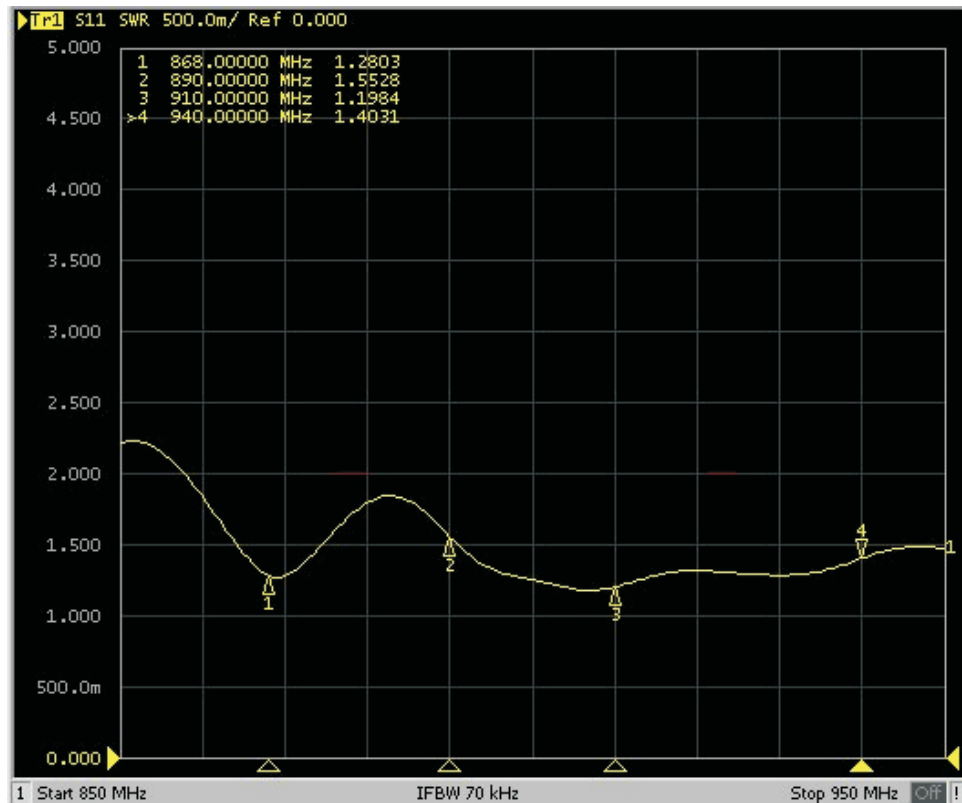


GSM1800/1900

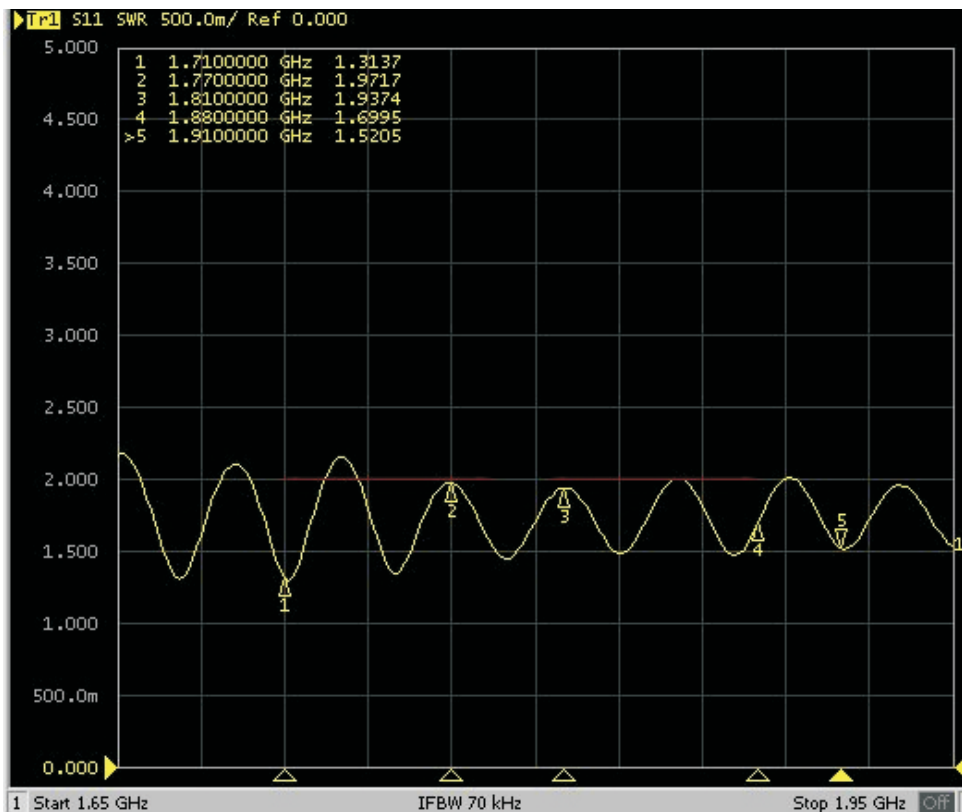


GPS

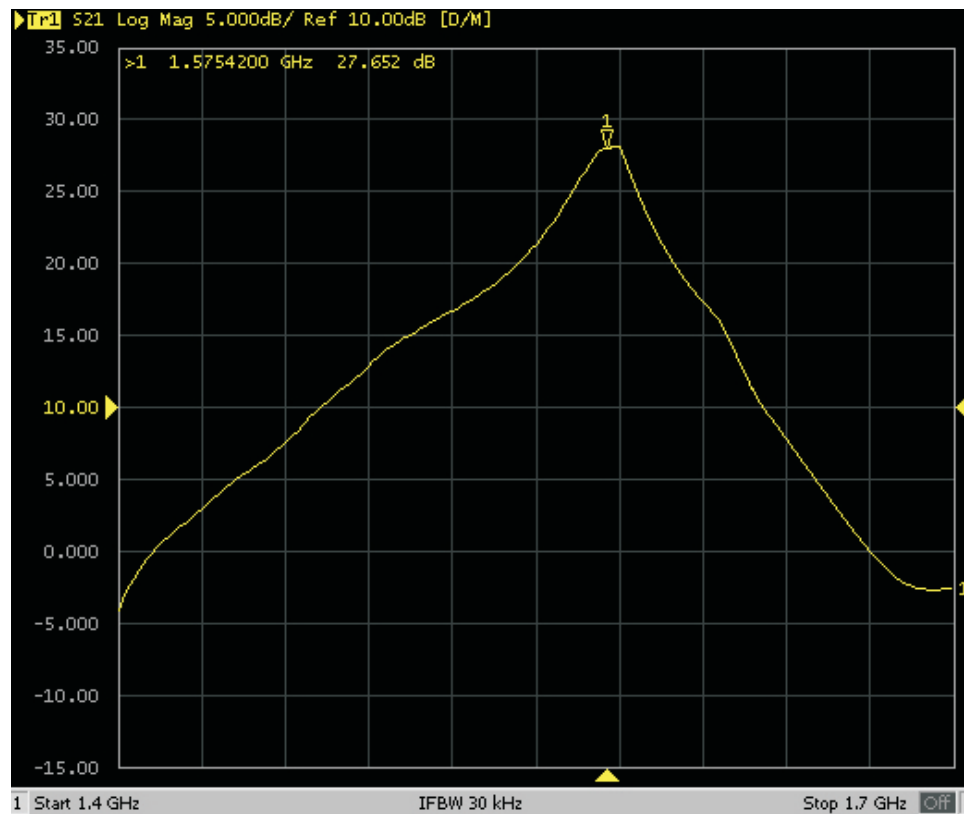

WIFI

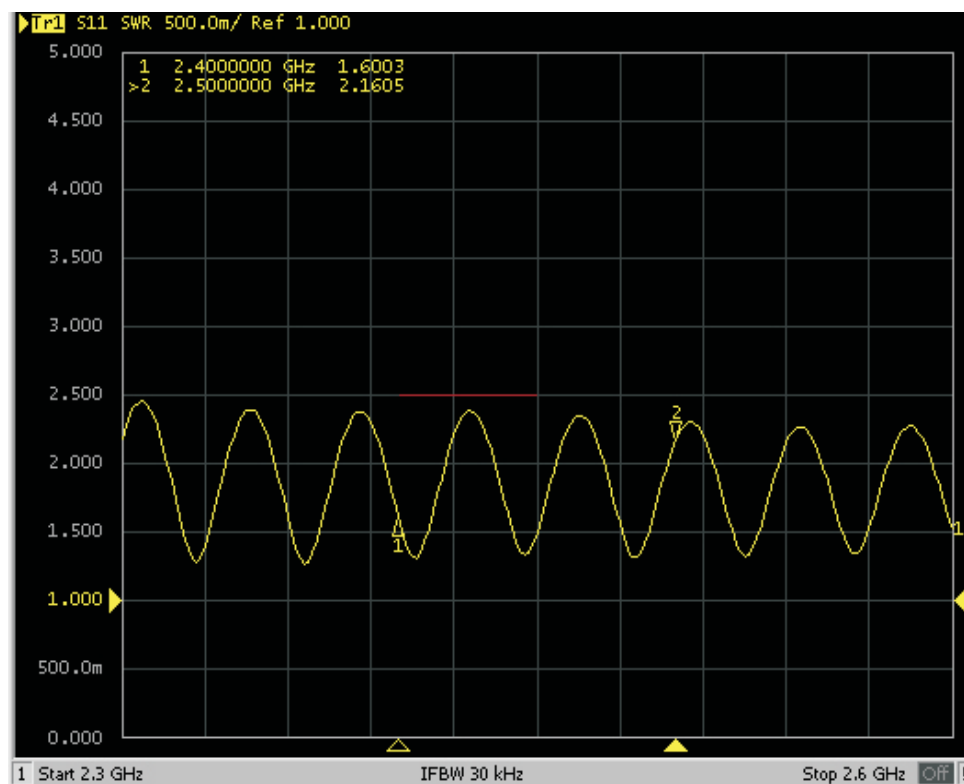

Elevation

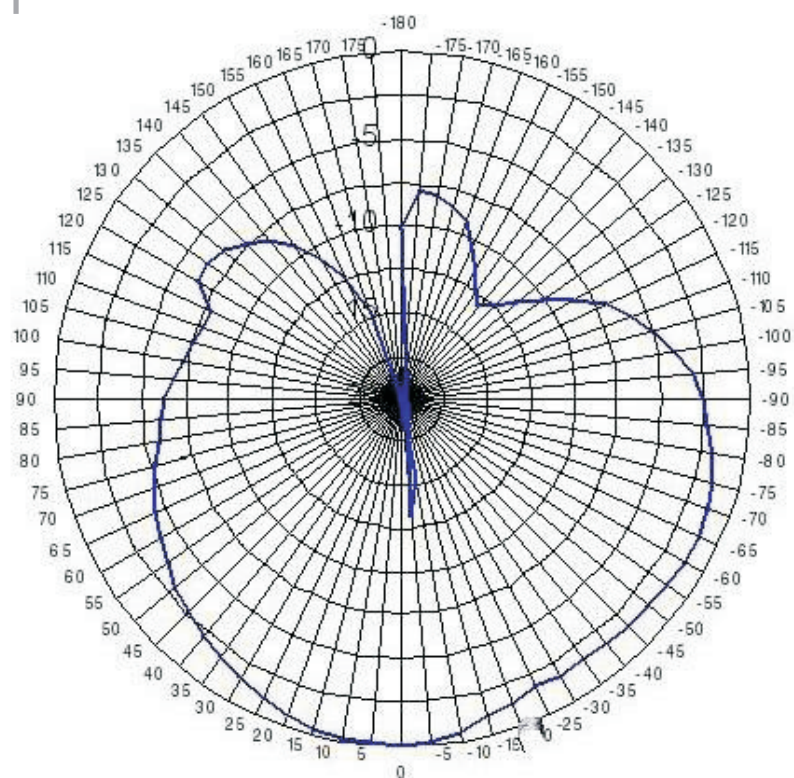

Azimuth

