



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.BS.292SMA27mm
Between Series – 2.92mm male / SMA male

| Frequency (GHz) | Impedance (Ω) | VSWR (max) | Insertion Loss (dB f=frequency GHz) |
|-----------------|------------------------|------------|-------------------------------------|
| DC – 27 | 50 | 1.15:1 | 0.07 f ^{1/2} |

Notes:

- Material:
Body: SUS303 stainless steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -65C to +105C deg

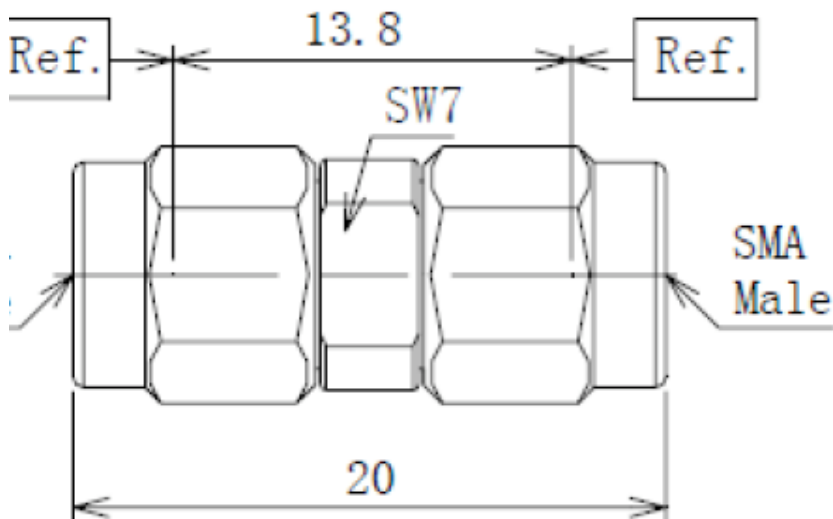

Dimensions are in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com