



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO20.05-18000Sf

20dB Directional Coupler SMA female


Electrical Specifications:

Frequency (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)
	Norm.	Flat.			
500 – 18000	20 ± 1.0	± 1.0	0.9	15	1.50 : 1

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places, termination 1 place
- Power: Forward/Reverse ≤ 20 W avg/ 3KW peak
- Case material: Aluminum alloy with black paint
- Operation temperature: -55C to +85C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

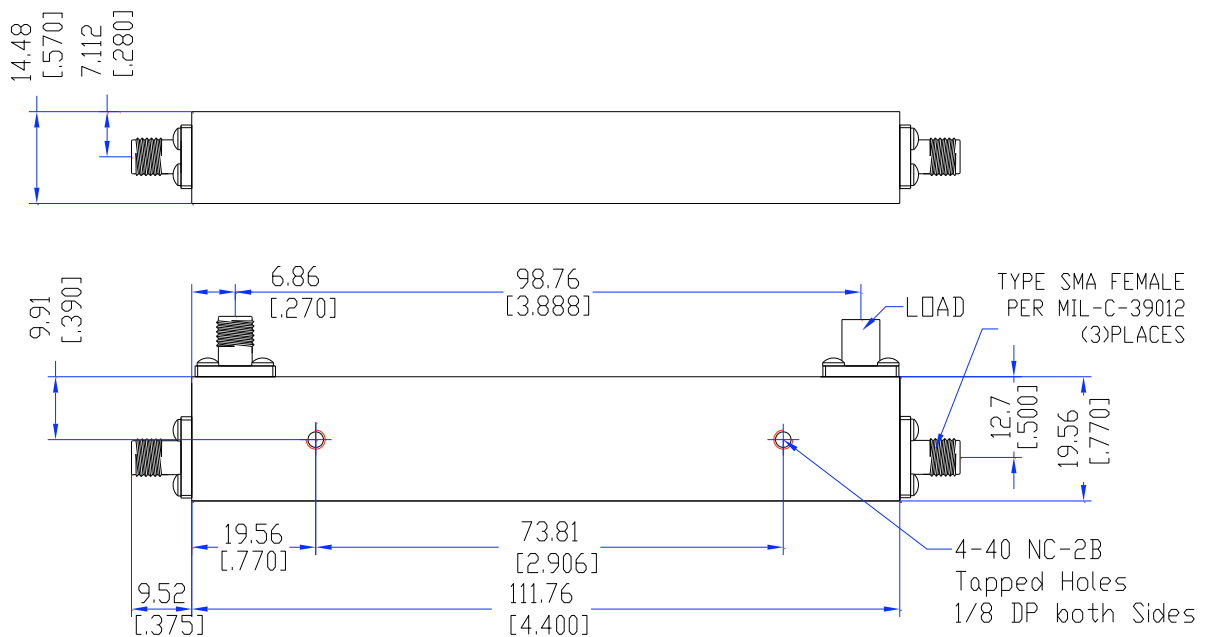

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com