



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Directional Coupler

Model RMCO10.18000Sf


10dB Directional Coupler SMA female

| Frequency (MHz) | Coupling (dB) | | Insertion Loss (dB max) | Directivity (dB min) | VSWR (max) |
|-----------------|---------------|-------|-------------------------|----------------------|------------|
| | Norm. | Flat. | | | |
| 2000 – 18000 | 10 ± 1.0 | ± 1.0 | 1.2 | 12 | 1.50 : 1 |

Notes:

- Input and output impedance: 50 Ohms
- Connector: SMA female 3 places, termination 1 place
- Power: Forward/Reverse < 50 W avg/ 1KW peak
- Case material: Aluminum alloy iridite
- Operation temperature: -40C to +70C deg

Complies with the requirement set out the Council Directive 2002/95/EC. The following standards were applies: EPA3050B&AAS, EPA3060A&EPA7196, EPA3052&AAS, EN1122: 2001&AAS, EPA3540C&GC-MS

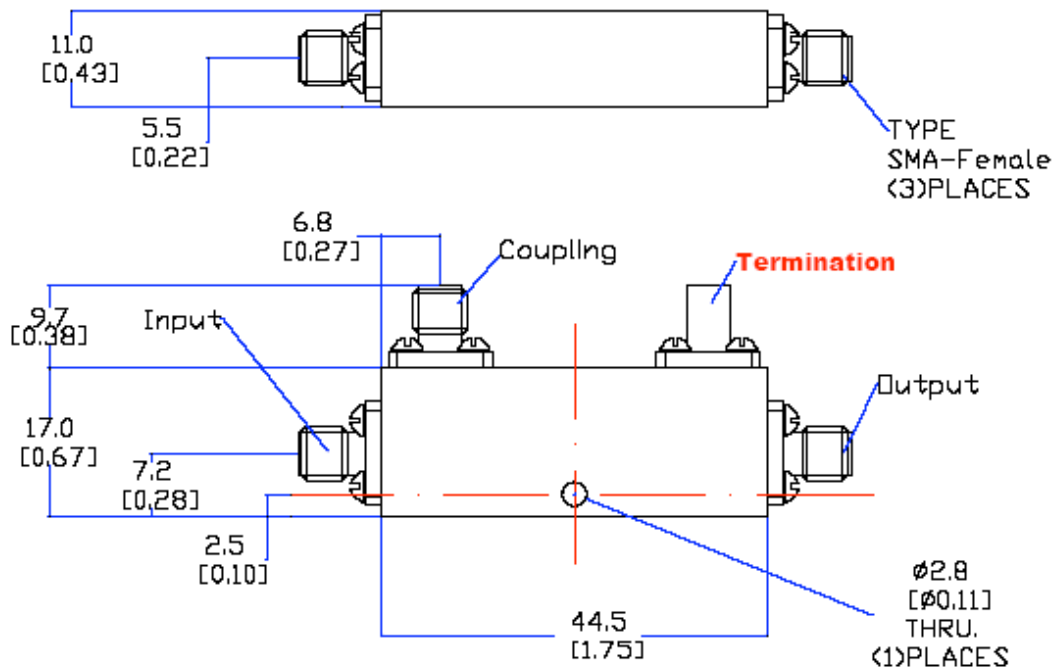

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com