



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

Power Divider / Splitters


Model RMPD2.8000Nf

2 way Power Divider Type N jacks

Frequency (GHz)	Insertion Loss (dB)		Isolation (dB) Min	Return Loss (dB)				Phase Balance (°) Max	Amplitude Balance (dB) Max
	2-6 GHz Max	6-8 GHz Max		Input		Output			
				2-6 GHz Max	6-8 GHz Max	2-6 GHz Max	6-8 GHz Max		
2 - 8	1.0	1.2	20	1.45	1.50	1.40	1.45	4	0.4

Notes:

- Input and output impedance: 50 Ohms
- Connector: N female jack
- Forward Power: ≤ 15 W; Reverse Power ≤ 1 W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -35C to +80C deg

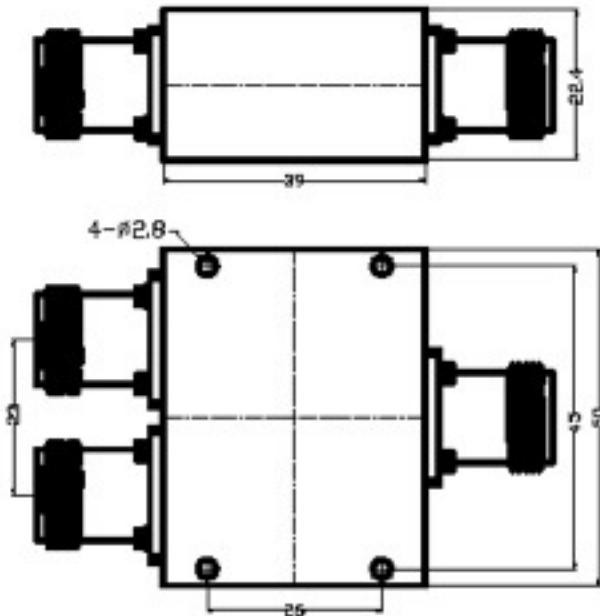

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com