



94 Jackson Road, Devens, MA 01434-4012 USA

## ADAPTORS


Model RMAD.IS.RPTNCmfRA

In Series –  
RPTNC male to RPTNC female 90°

Frequency (GHz)	Impedance ( $\Omega$ )	VSWR (max)	Insertion Loss (dB min)
DC – 11	50	1.20:1	0.7

### Notes:

- Material:
  - Body: brass/nickel
  - Contacts: BeCu/gold
  - Dielectric: PTFE
  - Gasket: silicon
- Operation temperature: -55C to +85C deg
- Interface: per MIL-C-83517 & IEC169-15

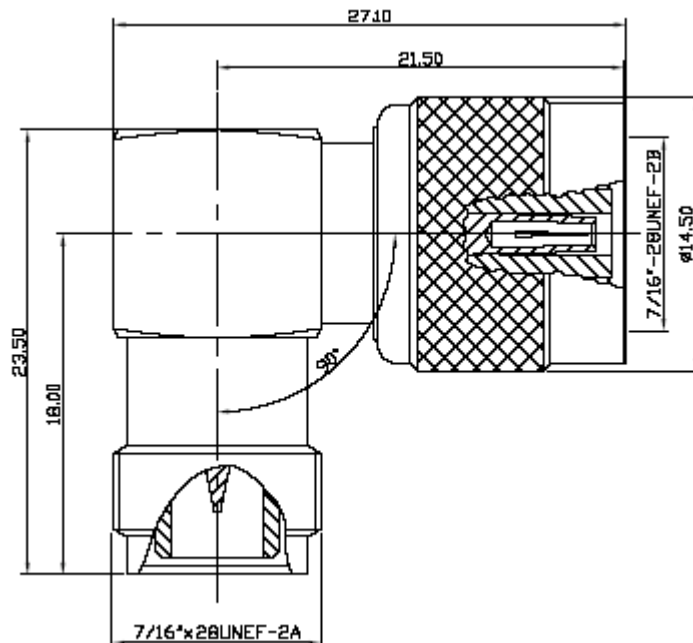

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)