



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

ADAPTORS


Model RMAD.IS.NNPfm
N female / push-on N male

In Series – N Quick Connect

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB f=frequency GHz)
DC – 18	50	1.15:1	0.07 f ^{1/2}

Notes:

- Material:
Body: SUS303 Stainless Steel/passivate
Socket Contacts: BeCu/gold
Dielectric: PEI
- Operation temperature: -65C to +105C deg

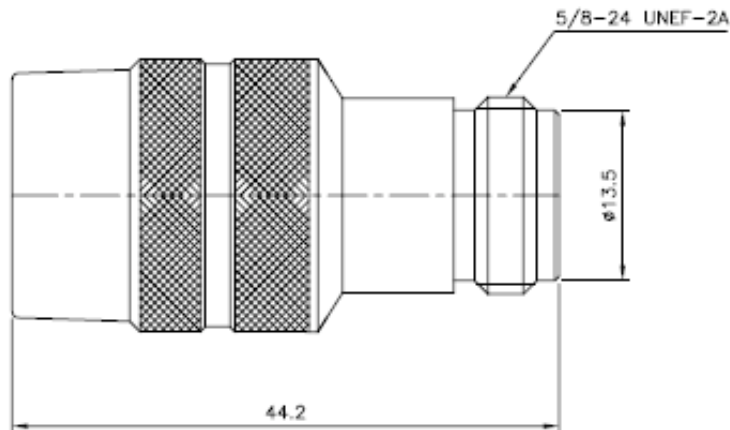

Dimensions in mm. All specifications subject to change

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com