



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


## ADAPTORS

### Model RMAD.IS.SMA27ff4HF In Series – SMA f/f 4-hole flange

Frequency (GHz)	Impedance ( $\Omega$ )	VSWR (max)	Insertion Loss (dB)
DC – 27	50	1.15:1	0.035 f ½

#### Notes:

- Material:  
Body: SUS303/passivated  
Socket Contacts: BeCu/gold
- Operation temperature: -60C to +165C deg
- Interface: SMA per MIL-STD-348A
- Durability: 500 mating cycles

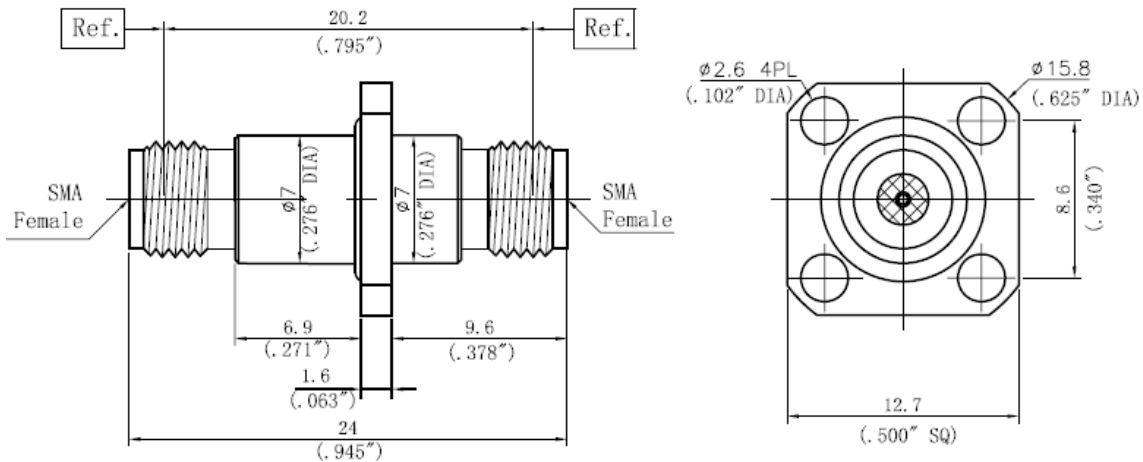

All specifications subject to change

Telephone: 978-772-3767  
772-3768

Fax: 978-

[www.responsemicrowave.com](http://www.responsemicrowave.com)