



94 Jackson Road, Devens, MA 01434-4012 USA

## ADAPTORS


Model RMAD.BS.SMABNCffBH<sub>a</sub>

Between Series – BNC female to SMA female bulkhead

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB min)
DC – 8	50	1.20:1	0.5

**Notes:**

- a. Material:
  - Body: brass/nickel
  - Contacts: BeCu/gold
  - Dielectric: PTFE
  - Nut: Brass/nickel
  - Washer: Brass/nickel
- b. Operation temperature: -55C to +85C deg
- c. Interface: per MIL-C-83517

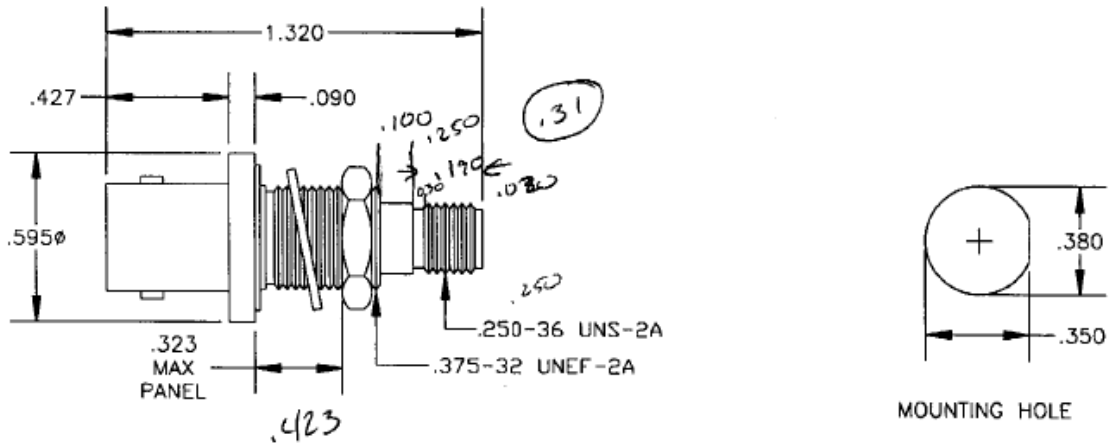

All specifications are subject to change without notice.