



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Directional Coupler

Model RMCOxx.7000-18000TNCf


6,10,20 or 30dB TNC female

### Electrical Specifications:

Frequency (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)
	Coupling	Flat.			
7000 –18000	xx	± 1.0	0.8	12	1.50 : 1

### Notes:

- Input and output impedance: 50 Ohms
- Connector: Coupled Port TNC female, Mainline TNC female
- Power: <50 W
- Case material: Aluminum alloy with iridite plating
- Operation temperature: -35C to +80C deg
- RoHS Compliant part
- Insert coupling value 6, 10, 20 or 30dB at “xx”

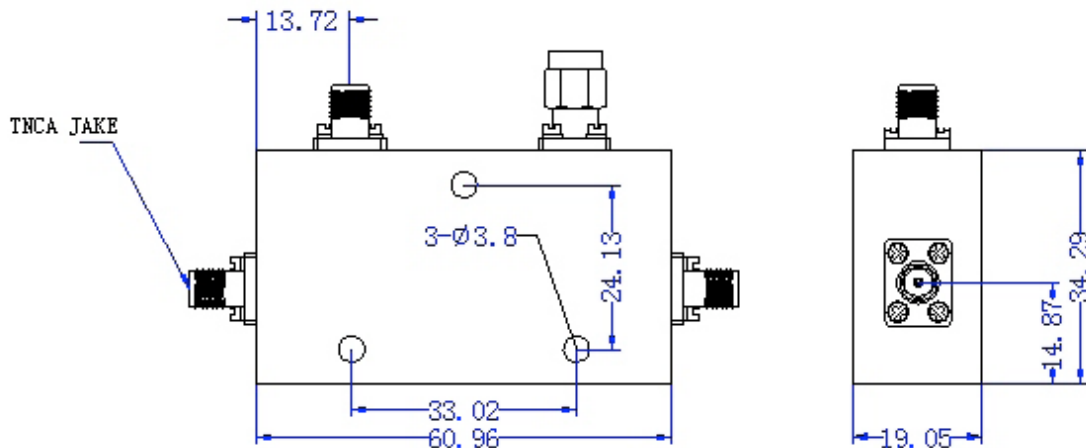

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)