



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

## ADAPTORS


Model RMAD.BS.SMAnff4HF

Between Series -  
SMA female to N female 4-hole flange

Frequency (GHz)	Impedance ( $\Omega$ )	VSWR (max)	Insertion Loss (dB min)
DC – 10	50	1.20:1	0.5

### Notes:

- Material:  
Body: brass/nickel  
Contacts: BeCu/gold  
Dielectric: PTFE  
Gasket: silicon
- Operation temperature: -55C to +85C deg
- Interface: per MIL-C-83517

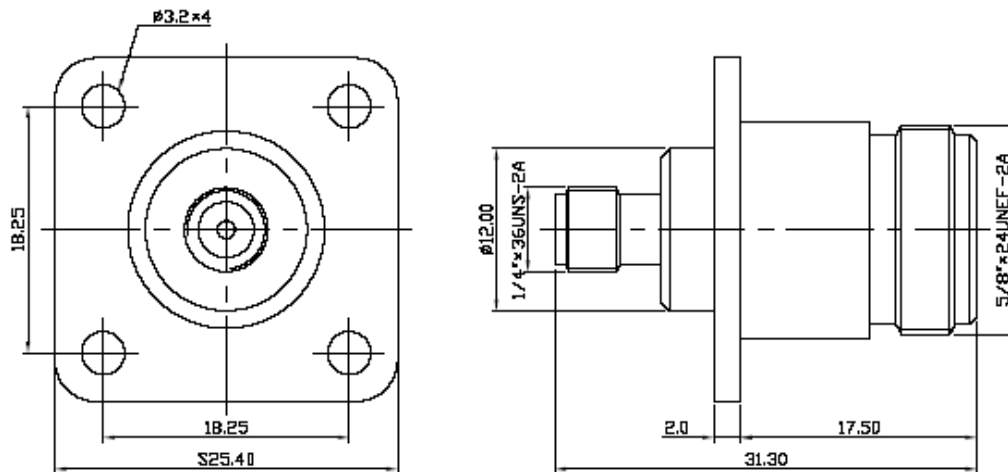

Telephone: 978-772-3767

Fax: 978-772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)