



9 4 J A C K S O N R O A D , S U I T E 1 1 0 , D E V E N S , M A 0 1 4 3 4

## TERMINATIONS


Model RMTE.18000Sm05

SMA male, Screw-on

FREQUENCY (MHz)	POWER (WATT)(max)	IMPEDANCE ( $\Omega$ )	VSWR (max)
DC-18000	0.5	50	1.20:1

### Notes:

- Case Materials/Plating:  
Housing: Stainless steel/ passivate  
Center Contact: Gold plated BeCu  
Resistive element: Thin film  
Resistor substrate: Alumina
- Operation temperature: -55C to +150C
- C suffix = 2" bead chain and eyelet

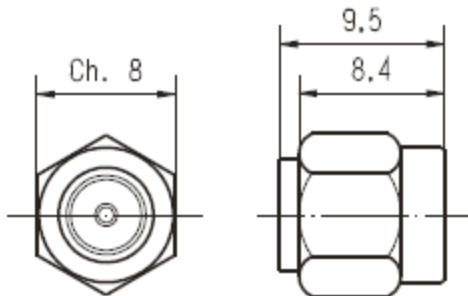

*All specifications are subject to change without notice.*

Telephone: 978-772-3767  
772-3768

Fax: 978-

[www.responsemicrowave.com](http://www.responsemicrowave.com)