



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434 USA

## Directional Coupler


Model RMCO20.2200Nf

20dB, N female\*

Frequency Range (MHz)	Coupling (dB)		Insertion Loss (dB max)	Directivity (dB min)	VSWR (max)
	Norm.	Flat.			
800 – 2200	20 ± 0.7	± 0.7	0.5	15	1.40 : 1

### Notes:

- Input and output impedance: 50 Ohms
- Connector: N female jack ( \*SMA female also available )
- Power: ≤ 50 W
- Case material: Aluminum alloy with Nickel-plating, logo/date code laser engraved.
- Operation temperature: -35C to +80C deg

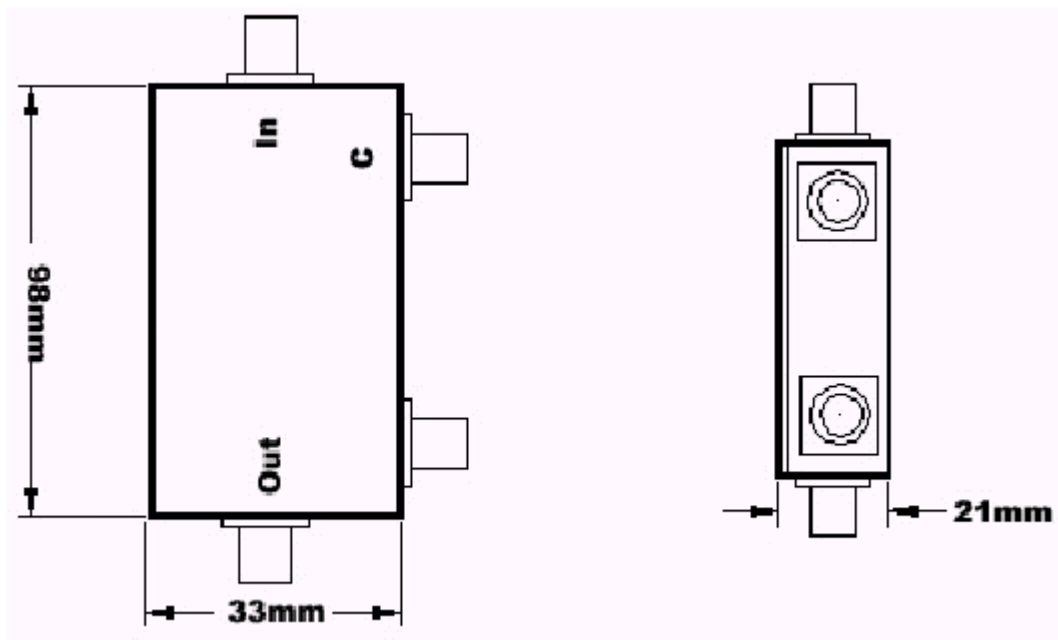

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978772-3768

[www.responsemicrowave.com](http://www.responsemicrowave.com)