



94 Jackson Road Suite 110 Devens , MA 01434-4012 USA

Power Dividers/Combiners

Model RMPD2.6-18Sf


2-Way Power Divider SMA Female

Electrical Specifications:

Frequency (MHz)	Insertion Loss (dB) typ/max	Isolation (dB) typ/min	VSWR (typ/max)	Phase Balance (°)	Amplitude Balance (dB)
6000 - 18000	0.8/1.8	20/16	1.5:1/1.8:1	5	0.4

Notes:

- Input and output impedance: 50 Ohms
- Connectors: SMA Female 3 places
- Power Handling: ≤ 25 Watt max Input ≤ 1.0 Watt Output
- Housing Material: Aluminum Alloy with paint
- Operation temperature: -35°C to $+80^{\circ}\text{C}$ deg

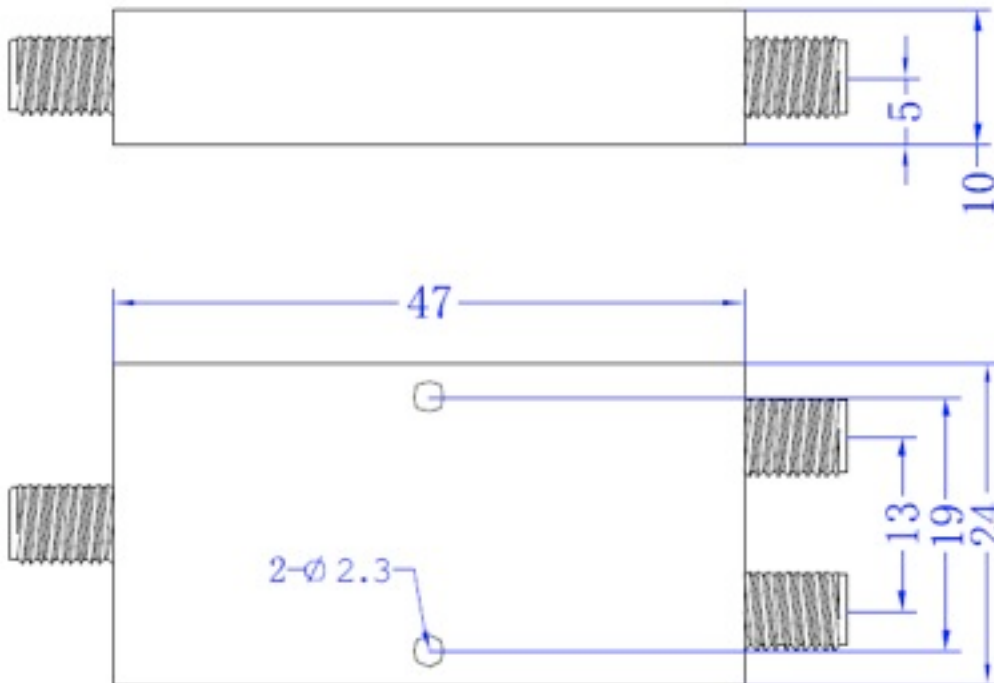

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com