



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434


ADAPTORS

Model RMAD.IS.SMASMAPfmF In Series – SMA Quick Connect
SMA female/ push-on SMA male (full detent)

Frequency (GHz)	Impedance (Ω)	VSWR (max)	Insertion Loss (dB f=frequency GHz)
DC – 27	50	DC-18GHz - 1.18:1 max 18-27GHz – 1.25:1 max	0.035 f ¹ / ₂

Notes:

- a. Material:
 - Body: SUS303/passivated
 - Socket Contacts: BeCu/gold
- b. Operation temperature: -60C to +165C deg
- c. Interface: SMA per MIL-STD-348A
- d. Durability: 500 mating cycles

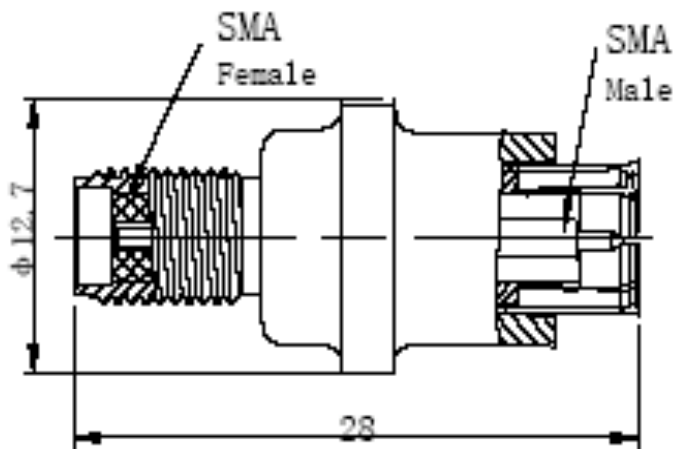

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com