
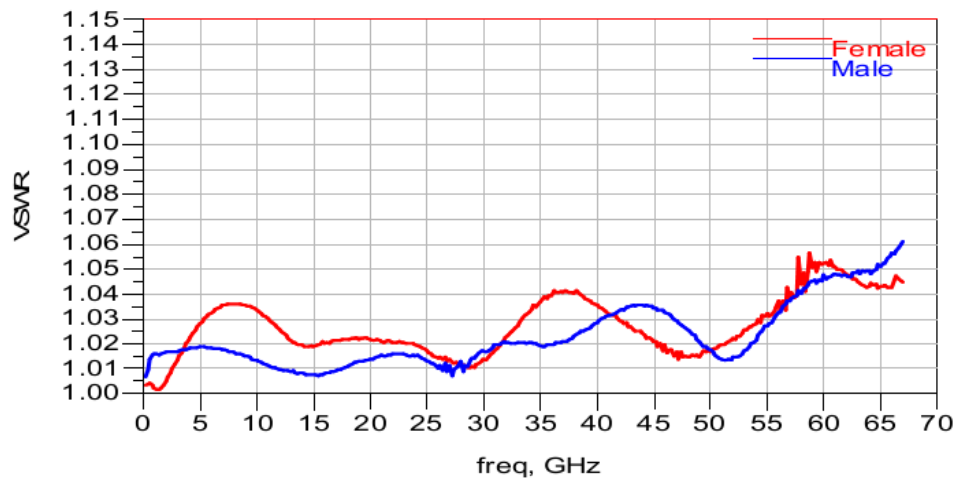


1.85mm DC-67GHz 0.5W TERMINATION

--- RFST1G67VM

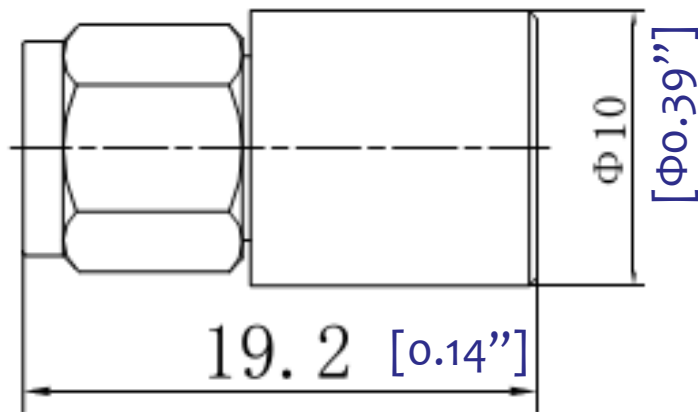

1.0	Mechanical Specifications	
1.1	Coaxial Connector	1.85mm-Male
1.2	External Body Finish	Body painted black epoxy enamel
1.3	Weight	8g

2.0	Environment specifications	
2.1	Operation Temp.	-50°C~+120°C (case temp.)
2.2	Storage Temp.	-20°C~+70°C
2.3	Vibration	10g rms (15 degree 2KHz)
2.4	Humidity	100% RH at 35c, 95%RH at 40°C
2.5	Shock	20G for 11msc

3.0	Electrical Specifications	
3.1	Frequency Range	DC-67GHz
3.2	Input Power	0.5W
3.3	VSWR	1.15
3.4	Resistance	50(Ω)

PAGE 1 OF 1	DATE MAY 6 th 2000
PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY.	DESIGN RFFC RF-LAMBDA RFFC
 RFST1G67VM Termination	CAD MODEL REVISION 10 ASSEMBLY REVISION VS2 ASSEMBLY NAME RFLVR07 DRAWING NUMBER D05-A
www.rflambda.com	SIZE LT SHEETS 1 OF 1
RF-LAMBDA	