

Allows mounting up to five (5) sensors for multi-axis acceleration and/or inclination measurements.


Available in Delrin (POM) plastic or Aluminum.

Compatible with the following Seika sensors:

- NB3 Inclinator
- B1, B2, and B3 Accelerometers

Note:

- Sensors sold separately
- *Sensor must be ordered with the M4 mounting stud option.*

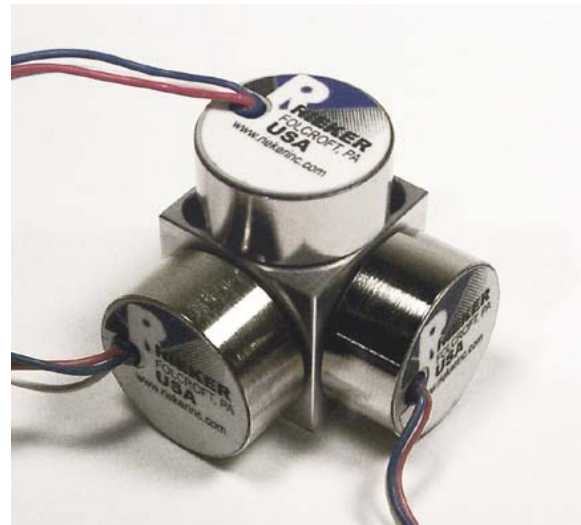

TECHNICAL DATA		
PART NUMBER	MATERIAL	WEIGHT
BS24	Plastic (Polyoxymethylene)	.65 Ounces (18.5 Grams)
BS24-A	Aluminum	1.13 Ounces (32 Grams)

Figure 1: BS24 Dimensions (in millimeters)

