


REVISIONS		
NO.	MODIFY CONTENT	DATE


NO.	REV. NAME
1	YU
2	XU
3	YU
4	XU
5	YANG
6	LONG
7	SN
8	SN
9	SN
10	SN
11	SN
12	SN
13	SN
14	SN
15	SN
16	SN
17	SN
18	SN
19	SN
20	SN
21	SN
22	SN
23	SN
24	SN
25	SN
26	SN
27	SN
28	SN
29	SN
30	SN
31	SN
32	SN
33	SN
34	SN
35	SN
36	SN
37	SN
38	SN
39	SN
40	SN

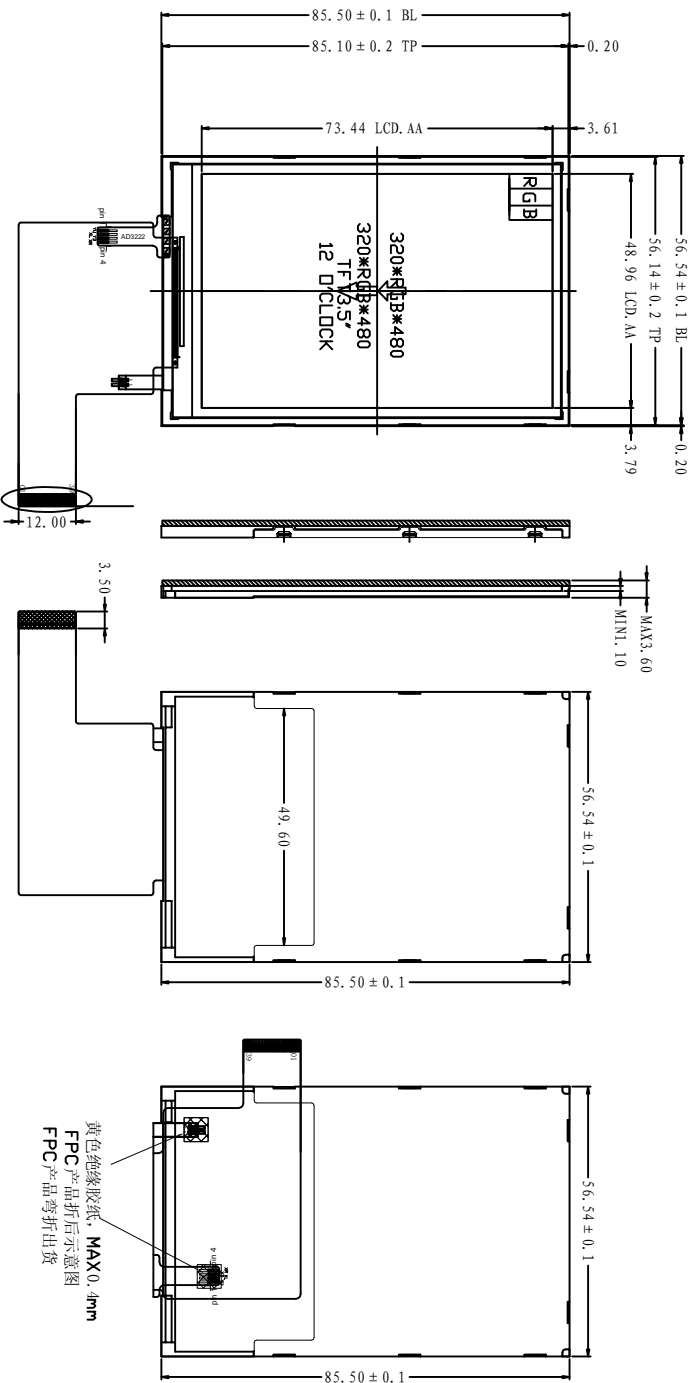

NOTES:

- 1.Backlight: 6 WLED In Parallel
- 2.Back Light Driver Voltage: 19.2~19.8V
- 3.Back Light Circuit: 15mA
- 4.LCD: Operating temperature: -20~70,ac Storage temperature: -30~80,ac
- 5.LCD Driver: ILJ9486
- 6:未注明圆角皆为R=0.5mm
- 7.General tolerance: ±0.2

Pin#	建库名称
1	YU
2	XL
3	YD
4	XR

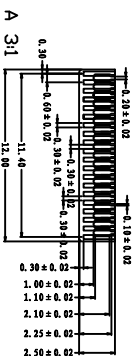

LDI CONNECT DIAGRAM:  
 A(○) → 黄色绝缘胶纸 (K-C)  
 1:±0.5 MM 2:±0.8 MM 3:0.5Y

客户确认所有图纸签字:

		SHENZHEN ROGTIN ELECTRONICS CO., LTD	
MODEL	RX035A-07	REV	A
SCALE	L C D	DATE	2014.03.11
DRAWN BY	JHT	CHECKED BY	
TBL	86-0755-27398873	CHECKED BY	
FAX	86-0755-29113212	CHECKED BY	
APPROVED BY		UNLINKED TOLERANCE	±0.2
		UNIT	mm
		PROJ	10