


Pin Name	Description
1	GND
2	VDD
3	RESETB
4	CS
5	RS
6	WR
7	RD
8	IM0
9	GND
10	VDD
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	GND
20	GND
21	LED-K3
22	LED-K2
23	LED-K1
24	LED-A

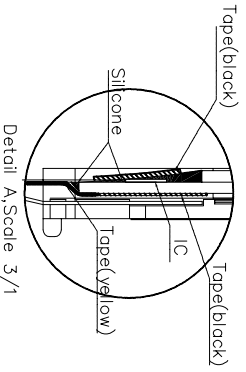

Display type: TFT/Normal white
 Display mode: Transmissive
 Viewing direction: 12:00
 Driver IC: IL19225
 Interface type: 8080-8bits
 Logic voltage: 2.8V
 Operating temperature: -20°C ~ +70°C
 Storage temperature: -30°C ~ +80°C
 Backlight: 3 Chip-white LED
 LED=60mA; VLED=3.2V

REV	Revision content description	Date
A	FIRST ISSUE	2014.2.15

 深圳市如新电子有限公司			
TOLERANCE (公差)	Mod. Name	PART. Name	
UNLESS OTHERWISE SPECIFIED	RXD22A-03		
UNIT: DESIGNED (structure) / DESIGNED (electron)	APPROVED	DRAWING NAME	
mm		ASSEMBLE	