

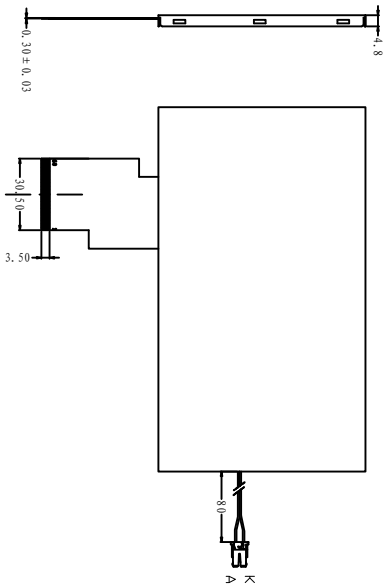


NO.	SYMBOL	NO.	SYMBOL
1	AGND	31	VSD
2	AVDD	32	MODE3
3	VCC	33	RSTB
4	R0	34	STBYB
5	R1	35	SHLR
6	R2	36	VCC
7	R3	37	UPDN
8	R4	38	GND
9	R5	39	AGND
10	R6	40	AVDD
11	R7	41	VCDm/n
12	G0	42	DITH
13	G1	43	NC
14	G2	44	NC
15	G3	45	V10
16	G4	46	V9
17	G5	47	V8
18	G6	48	V7
19	G7	49	V6
20	B0	50	V5
21	B1	51	V4
22	B2	52	V3
23	B3	53	V2
24	B4	54	V1
25	B5	55	NC
26	B6	56	VGH
27	B7	57	VCC
28	DCLK	58	VGL
29	DIE	59	GND
30	HSD	60	NC

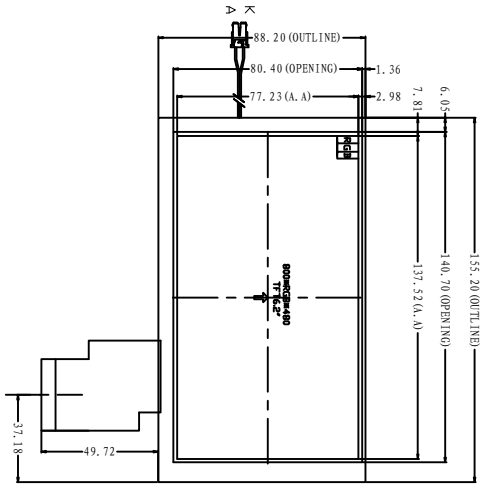


LED CIRCUIT DIAGRAM

NOTES:

1. Display mode: Transmissive
2. Interface Type: System parallel
3. Viewing direction: 6:00
4. Driver IC: ILI5480+ILI6123H (S)
5. Input voltage: 3.0~3.6V
6. Backlight: White LED(3x8LED, parallel)
If=160mA Vf=9.6V
7. Operating temperature: -20°C ~ +70°C
8. Storage temperature: -30°C ~ +80°C
9. Interface connector: FPC
10. Request: ROHS

Rev.	Revision content description	Date
A	FIRST ISSUE	2013.9.3

 深圳市如新电子有限公司					
TOLERANCE (公差)	Mod.Name	PART.Name			
TOLERANCE UNLESS OTHERWISE SPECIFIED	X.XX±0.3	IVO062-01	LCM		
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED	DRAWING NAME	
mm	JHU			ASSEMBLE	