

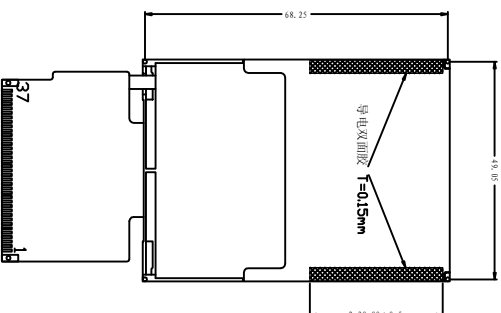


1	DB1
2	DB2
3	DB3
4	DB4
5	GND
6	IDVCC
7	CS
8	RS
9	WR
10	RD
11	NC
12	X+
13	Y+
14	X-
15	Y-
16	LEDA
17	LEDK4
18	LEDK3
19	LEDK2
20	LEDK1
21	NC
22	DG5
23	DB10
24	DB11
25	DB12
26	DB13
27	DB14
28	DB15
29	DB16
30	DB17
31	RESET
32	VCC
33	VCC
34	GND
35	DB6
36	DB7
37	DB8

NOTE:

1. LCD TYPE: 2.8" TFT ILI9341V
2. LCD IC: ILI9341V
3. VIEWING DIRECTION: 12:00' CLOCK
4. BACKLIGHT: 4 CHIPS WHITE LED
5. OPERATON TEMP: -20°C ~ 70°C
6. STORAGE TEMP: -30°C ~ 80°C
7. GENERA TOLERANCE: ±0.2
8. Connector: FPC

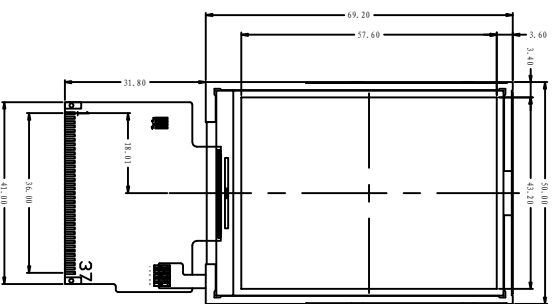

BL CIRCUIT DIAGRAM
60MA/3.1V (TYPE)

REV	Revision content description	Date
A	FIRST ISSUE	2014.2.15

 深圳市如新电子有限公司			
TOLERANCE (公差) UNLESS OTHERWISE SPECIFIED	X.X±0.3 X.XX±0.2	Mod.Name RX028A-0801	PART.Name LCM
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED
mm	JHJ		
			DRAWING NAME ASSEMBLE