





1	VLED+
2	VLED+
3	VLED-
4	VLED-
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	HS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	G7
21	G6
22	G5
23	G4
24	G3
25	G2
26	G1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	LR
40	UD
41	VGH
42	VEL
43	AVDD
44	RESET
45	NC
46	VCOM
47	DITHB
48	GND
49	NC
50	NC

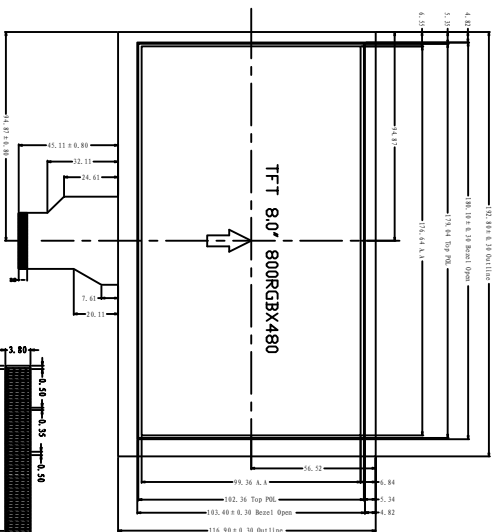

- NOTES:
1. Display mode: Transmissive
 2. Interface Type: System parallel
 3. Viewing direction: 6:00
 4. Driver IC: NT39419B+NT52001
 5. Input voltage: 2.6~5.3V
 6. Backlight: White LED(3x12LED, parallel)
If=240mA Vf=9±0.3V
 7. Operating temperature: -20°C ~ +70°C
 8. Storage temperature: -50°C ~ +80°C
 9. Interface connector: FPC
 10. Request ROHS

A	FIRST ISSUE	2013.12.30

 深圳市如新电子有限公司	TOLERANCE (公差)	Mod. Name	PART. Name	 ASSEMBLE
	DIMENSIONS DECIMAL FRACTION X.X ± 0.3 FRACTION X.XX ± 0.2 UNIT DIMS (ONED) (structure) DIMS (ONED) (electrom)	RX080A-03		
SCALE	DRAWING NAME			SHEET
FIT				1/1