





1	DB1
2	DB2
3	DB3
4	DB4
5	GND
6	VCC
7	CS
8	RS
9	WR
10	RD
11	IM0
12	X+
13	Y+
14	X-
15	Y-
16	LEDA
17	LEDK4
18	LEDK3
19	LEDK2
20	LEDK1
21	GND
22	DG5
23	DB10
24	DB11
25	DB12
26	DB13
27	DB14
28	DB15
29	DB16
30	DB17
31	RESET
32	VCC
33	VCC
34	GND
35	DB6
36	DB7
37	DB8

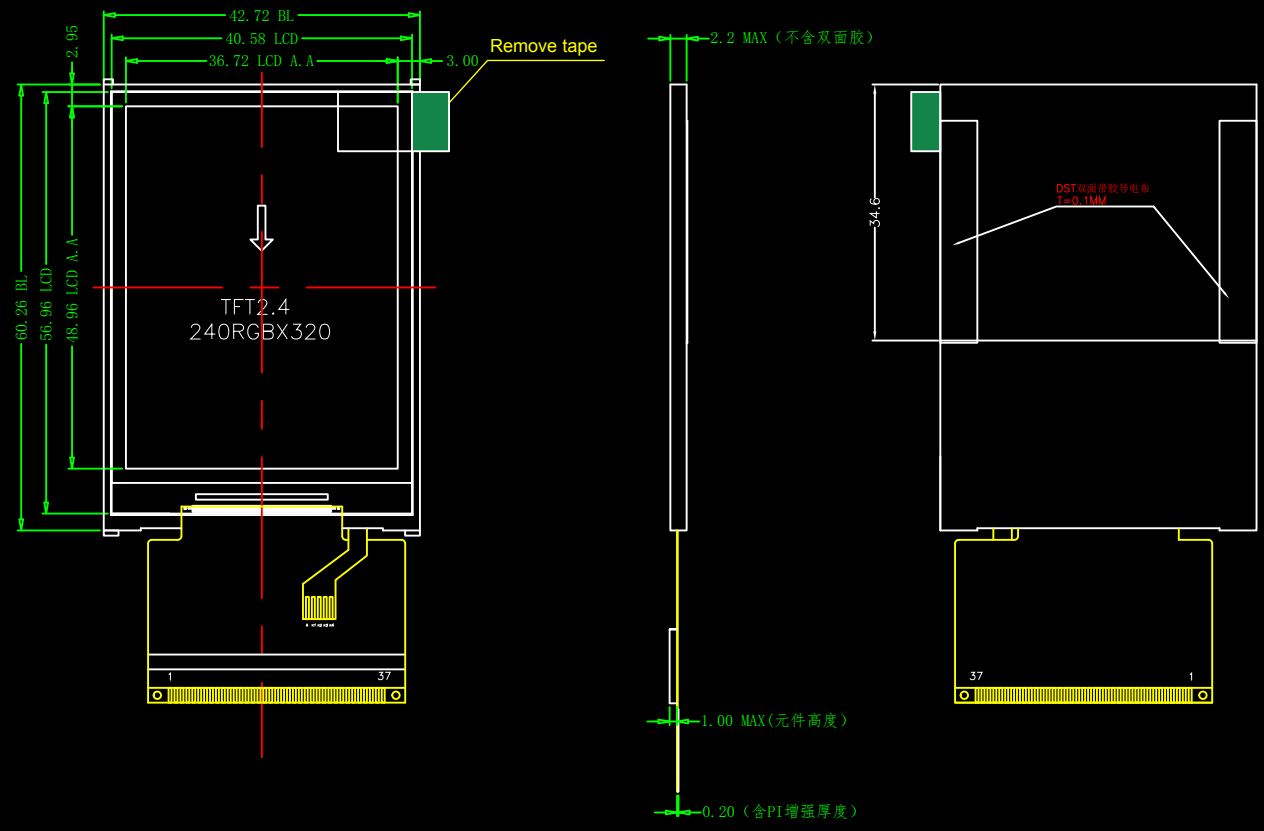

NOTE:
 1. LCD TYPE: 2.4" TFT
 2. LCD IC: ILI9341V
 3. VIEING DIRECTION: 12 O' CLOCK
 4. BACKLIGHT: 4 CHIPS WHITE LED
 5. OPERATON TEMP: -20°C ~70°C
 6. STORAGE TEMP: -30°C ~80°C
 7. GENERA TOLERANCE: ±0.2

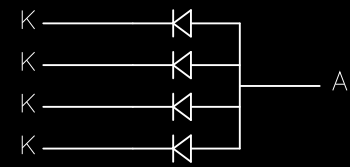

REV	Revision content description	Date
A	FIRST ISSUE	2013.05.16

 深圳市如新电子有限公司				
TOLERANCE(公差)		Mod.Name	PART.Name	
TOLERANCE UNLESS OTHERWISE SPECIFIED		X.X±0.3 X.XX±0.2	RX024A-09	LCM
UNIT	DESIGNED(structure)	DESIGNED(electron)	APPROVED	DRAWING NAME
mm	JHJ			ASSEMBLE