

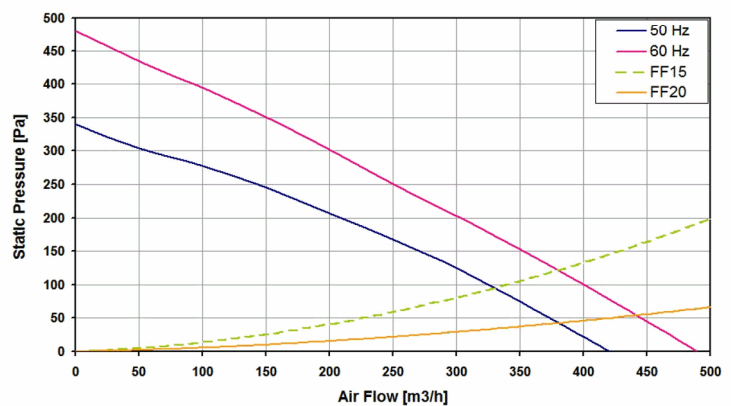


"TP19_IP55" SERIES

Description: **Roof Exhaust Unit IP55 UL**

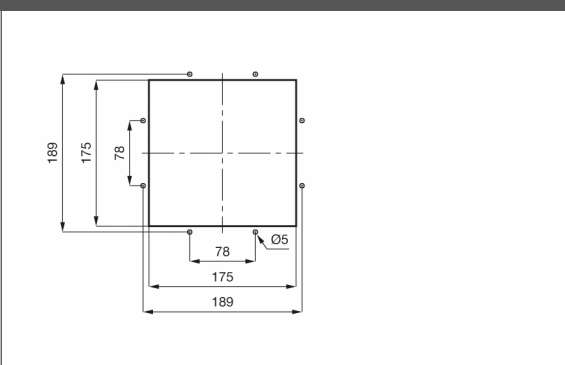

Type of material: ABS/PC alloy and aluminium
Standard colour: RAL 7035 - other colours on request
Protection degree: IP55, according to EN 60529 Standard Type 12 according to UL 508 Standard
Fixing method: By No 8 Ø4x16 mm screws for thermoplastic material
Plate thickness: any
Storage temperature: from -20°C to +60°C
Motor Lifetime L10 at 25°C 80%RH (approx.): 115V 48,000h 60Hz 230V 62,000h
 50Hz; 70,000h 60Hz
Working class of capacitor: class B
Motor protection: thermal
Electrical connection: by terminal block 3 poles L-N-PE
Earth connection: (by terminal block, PE pole)
Appliance class: class I
Type of filter media: thermo-linked progressive structure synthetic fibre
Filtering class: class G2 more metallic net according to EN 779
Degree of separation: 67% - DIN 24185 (without net)
Dust retention capacity: 380 g/m²
Note: filter media is washable about 10 times
Weight: 2.2 Kg
Approvals: CE, UL E237844, CSA

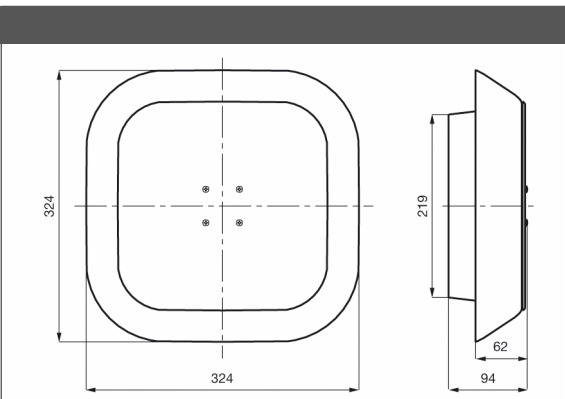

Model	Voltage (V)	Frequency (Hz)	Rated Current (A)	Rated Power (W)	Max Air Flow** (m ³ /h)	Static Pressure (Pa)	Fan Noise [db(A)]	Rated Temp. Range (°C)	Approvals
TP19U115B551	115 V a.c.	60	0.85	97	490	480	71.9	-10 - +55	CE; cURus; cCSAus
TP19U230B551	230 V a.c.	50/60	0.310/0.360	70/81	420/490	340/480	67.9/71.0	-10 - +55	CE; cURus; cCSAus

data with uncertainty of 10%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.