



Product Guide




## Associate Affiliations

CRI	Carpet and Rug Institute
FCICA	Flooring Covering Installation Contractors Association
NWFA	National Wood Flooring Association
ASTM	American Society of Testing Materials
IICRC	Institute of Inspection Cleaning and Restoration Certification
NAFCT	National Academy of Floor Covering Training
CFI	Certified Flooring Installers



[www.parabond.com](http://www.parabond.com)

**Scan The QR Code  
With Your Mobile Device**

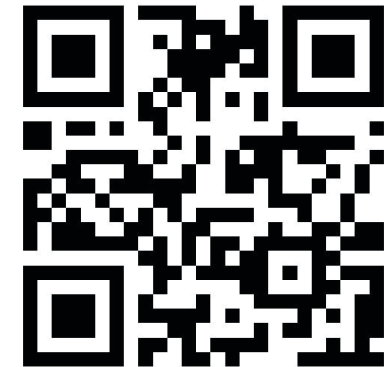

**View our Installation Videos on**





We live in a dynamic world which is shaped by global influences in business and communication. At Royal, we are active in major floor covering associations, flooring shows and advocacy groups, and maintain good partner relationships with our customers to understand the emerging needs of the market. Parabond floor covering adhesives are designed and formulated for successful installation of the most demanding carpet, luxury vinyl, resilient, and wood flooring on the market. Royal Adhesives and Sealants is a leader in the manufacture and development of quality acrylic polymer and thickeners that are used in Parabond's adhesive formulations. This capability provides a unique insight and advantage in consistently meeting the needs of our adhesive users.























In addition to meeting the needs of our customers, we remain committed to minimizing the environmental impact of our products. We manufacture adhesives that comply with the stringent testing of the Carpet and Rug Institute's Green Label Plus Program, SCS Floor Score Certification and CHPS. Producing products which meet these environmental standards enables us all to live a healthier life. Green is the color of speech today for a healthy home, school, work place, hospitality or health care facility. Parabond products are formulated with the understanding that environmental awareness is not just a marketing initiative but key to a sustainable business.

[www.royaladhesives.com](http://www.royaladhesives.com)



[www.parabond.com](http://www.parabond.com)

### Carpet Adhesive Selector

		DS902	4099	4096	4094	4092	5080	5060	Trowels & Coverage		
	ActionBac/Jute	Best	Best	Better	Better	Good			 1/8 " x 1/8" x 1/8" V coverage: 80-120 sq ft./gal	 3/32 " x 3/32" x 3/32" V coverage: 80-120 sq ft./gal	
	Latex Unitary	Best	Best	Better	Better				 1/8 " x 1/8" x 1/8" V coverage: 80-120 sq ft./gal	 3/32 " x 3/32" x 3/32" V coverage: 80-120 sq ft./gal	
	Hot Melt	Best	Better						 1/8 " x 1/8" x 1/8" V coverage: 80-120 sq ft./gal		
	Polyurethane Attached Backing	Best	Best	Better	Better				 3/32 " x 3/32" x 3/32" V coverage: 80-120 sq ft./gal		
	Woven - Non-Axminster	Best	Best	Better	Better				 1/8 " x 1/8" x 1/8" U coverage: 60-100 sq ft./gal		
	Woven - Axminster	Best	Better						 1/8 " x 1/8" x 1/8" U coverage: 60-100 sq ft./gal		
	Double Glue	Best	Better	Good	Good				 Carpet to Pad: 1/8 " x 1/8" x 1/16" U coverage: 45-60 sq ft./gal	 Pad to Substrate Non-Porous: 1/16 " x 1/16" x 1/16" V coverage: 125-175 sq ft./gal	 Porous: 1/16 " x 1/16" x 1/16" Sq. coverage: 125-175 sq ft./gal
	Vinyl Backed Carpet Tile						Best	Better	 1/16 " x 1/32" x 1/32" U coverage: 200-300 sq ft./gal		
	Fiber-Glassed Back Sheet Flooring						Best	Better	 Coverage: 250-350 square feet per gallon		

#### CRI-Carpet Installation Standard

Lack of adhesion caused by either a lower quality adhesive and/or wrong trowel selection is the **number one cause** of installation failure. A 100% transfer of floor adhesive into the carpet backing including the recesses of the carpet back, while maintaining full coverage of the floor, **must** be attained. Adhesive spread rates are approximate depending on the method of application, trowel selection, product, and sub-floor. Further information is available on the container label or technical data sheets.

### SIGNATURE SERIES DS 902 DUBL-STIK® ADHESIVE

DS 902 Dubl-Stik® has been specially developed for the permanent installation of carpet to cushion in double glue down application. It is a high solids adhesive that can be used for the installation of woven, tufted secondary backed and smooth backed unitary carpet over approved cushions, Hot Melt carpet and most of the majority of carpet backings found in the market place today.

- VOC Compliant • LEED Compliant - CRI GLP
- Low odor/odorless when dry • High Solids

Packaging: 4 gal.

### SIGNATURE SERIES 4099 HIGH PERFORMANCE MULTI PURPOSE ADHESIVE

4099 is recommended for the installation of most carpet backings used in heavy commercial applications. 4099 is extremely aggressive, quickly developing "tack" for those "hard to hold" installations resulting in saving time and money. 4099 is the perfect choice, whether installing carpet with Action-Bac or the more difficult to hold backings such as latex unitary, hot melt, Enhancer types and most of the majority of carpet backings found in the market place today. It is also recommended for the installation of fibrous backed resilient floor covering.

- VOC Compliant • Superior Green Strength
- Low odor/odorless when dry
- For heavy commercial use • LEED Compliant - CRI GLP

Packaging: 4 gal.

### SIGNATURE SERIES 4096 FAST GRAB MULTI-PURPOSE ADHESIVE

4096 Fast Grab Multi-Purpose Adhesive is a quick grabbing adhesive designed for installing carpet in a direct glue down or double glue down application and installing fibrous felt back sheet flooring. It is recommended for the installation of the following carpet backings: Action-Bac, Sponge-Rubber, Latex Unitary, High Density Foam, Latex Foam, and most of the majority of carpet backings found in the market place today.

- Solvent-Free • VOC Compliant
- Develops Fast Green Strength • CRI Green Label Plus
- For Commercial Use • Approved for Double Glue Down

Packaging: 4 gal.

### SIGNATURE SERIES 4094 PREMIUM MULTI PURPOSE ADHESIVE

4094 is a quick grabbing adhesive designed for installing carpet in a direct glue down or double glue down application and installing fibrous felt back sheet flooring.

- VOC Compliant • For commercial use
- Good Green Strength • LEED Compliant - CRI GLP

Packaging: 4 gal.

### SIGNATURE SERIES 4092 ECONOMY GRADE FLOORING ADHESIVE

4092 is a quick grabbing adhesive designed for installing direct glue down carpet and fibrous felt back sheet flooring.

- VOC Compliant • Quick Grab
- LEED Compliant - CRI GLP

Packaging: 4 gal., 1 gal.

### SIGNATURE SERIES 5080 PRESSURE SENSITIVE ADHESIVE

Signature Series 5080 Pressure Sensitive is a premium acrylic emulsion that combines the excellent performance of a pressure sensitive adhesive with environmental safety characteristics. 5080 is releasable, non-flammable, non-hazardous and water resistant. It provides a strong, long lasting bond. 5080 is designed for the installation of dimensionally stable vinyl-backed carpet tiles and vinyl tile & plank in a releasable application. This adhesive can also be used to install cushions to recommended substrates in double glue down applications. Due to its pressure sensitive characteristics, 5080 eliminates concern about installing a non-porous backed floor covering over a non-porous substrate.

New Construction Projects, or Green slabs can have a Moisture Vapor Emission Rate per ASTM F1869 of up to Eight (8) pounds per Twenty-Four (24) hours per one thousand (1000) square feet or 90% when tested in accordance with ASTM F-2170

- VOC Compliant • Floor Score Certified
- Excellent shear strength • Dubl-Stik® pad-to-floor
- LEED Compliant - CRI GLP

Packaging: 4 gal., 1 gal.



### SIGNATURE SERIES 5060 PRESSURE SENSITIVE ADHESIVE

5060 is an acrylic emulsion designed to be used with multiple types of floor coverings. 5060 is approved for the installation of dimensionally stable vinyl-backed carpet tiles, vinyl tile & plank, fiberglass backed sheet vinyl & approved cushions in double glue down applications.























- Solvent-Free • VOC Compliant
- Excellent plasticizer resistance
- CRI Green Label Plus Certified
- Floor Score Certified • Dries Clear, Dries Fast

Packaging: 4 gal., 1 gal.



## MULTI-PURPOSE ADHESIVES

## Resilient Adhesive Selector

		5082	4700	4600	4500	4323	4223	FUS X	4010	Spray	Trowels & Coverage		
											Porous	Non-Porous	
	Sheet Goods Felt Back	Best	Best	Best		Best	Good				 1/16" x 1/16" x 1/16" sq. coverage: 125-175 sq ft./gal	 1/16" x 1/16" x 1/16" V coverage: 125-175 sq ft./gal	
	Vinyl Composition Tile				Best					Best	 1/16" x 1/16" x 1/16" sq. coverage: 125-175 sq ft./gal	 1/16" x 1/32" x 1/32" U coverage: 200-300 sq ft./gal	
	Wall Cove/Base							Best			 1/8" x 1/8" x 1/8" sq coverage: 150-250 lin. ft./6" base	 1/8" x 1/8" x 1/8" V coverage: 150-250 lin. ft./6" base	Not Recommended
	Vinyl/Rubber Stair Treads & Radial Tiles		Best								 1/16" x 1/16" x 1/16" sq. coverage: 125-175 sq ft./gal	 1/16" x 1/16" x 1/16" V coverage: 125-175 sq ft./gal	
	Vinyl Backed Sheet Vinyl	Good	Best	Better						Best	 1/16" x 1/16" x 1/16" sq. coverage: 125-175 sq ft./gal	 1/16" x 1/16" x 1/16" V coverage: 125-175 sq ft./gal	
	Luxury Vinyl Tile, Vinyl Tile & Vinyl Plank	Best	Better	Good						Best	 1/16" x 1/16" x 1/16" sq. coverage: 125-175 sq ft./gal	 1/16" x 1/16" x 1/16" V coverage: 125-175 sq ft./gal	
	Recycled Rubber Flooring		Best							Best	See Technical Data Sheet	See Technical Data Sheet	
	Linoleum Tile/ Sheet Goods	Good	Best	Better							 1/16" x 1/16" x 1/16" sq. coverage: 125-175 sq ft./gal	 1/16" x 1/16" x 1/16" V coverage: 125-175 sq ft./gal	

Adhesive spread rates are approximate depending on the method of application, trowel selection, product, and sub-floor.



### FUSION SERIES 5082 VINYL TILE AND PLANK ADHESIVE



5082 is a solvent-free adhesive formulated for the installation of dimensionally stable luxury vinyl tile & vinyl plank, VCT and vinyl backed resilient sheet flooring. This high strength adhesive is made for installations over porous and non-porous substrates.

- VOC Compliant • Floor Score Certified
- Pressure Sensitive-Cures to a Hard Set Bond
  - LEED Compliant - CRI GLP
  - **MVER - up to 8lbs/90% RH**

Packaging: 4 gal., 1 gal.

### FUSION SERIES 4500 CLEAR THIN SPREAD VCT ADHESIVE



4500 is a solvent free-adhesive designed for the installation of Vinyl Composition Tile. It provides quick dry times and extended working time with up to 24 hours of aggressive tack.

- VOC Compliant • Solvent-Free
- Fast Drying • Excellent open time
  - LEED Compliant - CRI GLP
  - **MVER - up to 8lbs/90% RH**

Packaging: 4 gal., 1 gal.

### FUSION SERIES 4223 VINYL SHEET GOODS ADHESIVE



4223 is a latex based adhesive that has been specially formulated for the installation of mineral fibrous felt back floor covering. 4223 dries light in color and will not create any adhesive induced (below the surface) type discoloration.

- VOC Compliant • Excellent open time • Moisture and mildew-resistant • Non-hazardous
- LEED Compliant - CRI GLP • 1 Year Warranty

Packaging: 4 gal.

### FUSION SERIES 4700 RUBBER TILE AND STAIR TREAD ADHESIVE



4700 is a solvent-free, latex rich adhesive formulated to provide an exceptional bond when installing rubber or vinyl stair tread, radial tile or rubber sheet flooring over porous and non-porous surfaces.

- VOC Compliant • Floor Score Certified
- Excellent Open Time • LEED Compliant -CRI GLP
  - **MVER - up to 8lbs/90% RH**

Packaging: 4 gal., 1 gal.

### FUSION SERIES 4323 NON-STAINING SHEET GOODS ADHESIVE



4323 is a latex based adhesive that has been specially formulated for the installation of felt back sheet goods. 4323 dries light in color and will not create any adhesive induced (below the surface) discoloration.

- VOC Compliant • Excellent open time
- Moisture and mildew resistant • Freeze/thaw stable
  - Non-flammable • LEED Compliant - CRI GLP
  - 5 Year Warranty

Packaging: 4 gal., 1 gal.

### FUSION SERIES FUSION X WALL BASE ADHESIVE



FUSION X is a premium solvent-free adhesive with aggressive wet suction to grip rubber, vinyl and carpet wall base.

- VOC Compliant • Excellent Plasticizer Resistance
- Wraps Corners Easily • For all vinyl & rubber cove base • CHPS/CA 01350 • LEED Compliant - CRI GLP

Packaging: 4 gal., 1 gal., 30 ounce Cartridge,

### ROYAL VINYL FLOORING ADHESIVE






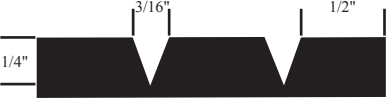




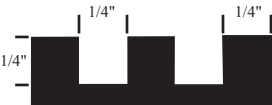

Royal Vinyl Flooring Adhesive is designed for the installation of dimensionally stable vinyl-backed carpet tiles, vinyl sheet and vinyl tile & plank in a releasable application. It is releasable and water resistant and provides a strong, long lasting bond. Due to its pressure sensitive characteristics, it eliminates concern about installing a non-porous backed floor covering over a non-porous substrate.

- Pressure Sensitive • Wide Spray Pattern
- Covers approximately 150 sq. ft. per can
  - Non-Flammable
  - **MVER - up to 10lbs/90% RH**

Packaging: 22 ounce Spray



## RESILIENT ADHESIVES

Wood Adhesive Selector							Trowels & Coverage	
		* IFS 4014	* EMC 4011	MS 4010	*EMC 2011	MS 2009		
	Engineered Wood and Prefinished Parquet	Commercial Residential	Commercial Residential	Commercial Residential	Commercial Residential	Commercial Residential	<p>For engineered plank up to 5" wide, up to 1/2" thick Use: 1/4" width x 1/8" depth x 1/4" space square notch trowel provided the sub-floor is smooth. This trowel can also be used for solids 3/8" or thicker.</p>  <p>Spread rate approx. 50 sq. ft. per gallon</p>	<p>For engineered plank wider than 5" and thicker than 1/2" Use: 3/16" x 3/16" x 3/16" square notch trowel.</p>  <p>Spread rate approx. 40 sq. ft. per gallon</p>
	Solid Wood	Commercial Residential	Commercial Residential	Commercial Residential		Residential	<p>1/8" x 1/8" x 1/8" Sq. For 1/4" to 5/16" thick</p>  <p>Spread rate approx. 50-55 sq. ft./gal.</p>	<p>For Thin Solids up to 3/8", <b>excluding exotic species, Bamboo and Teak</b>, use 3/16" width x 1/4" depth x 1/2" space V-notch trowel.</p>  <p>Spread rate approx 60 sq. ft. per gallon</p>
	Exotic Wood Solid/Engineered	Commercial Residential	Commercial Residential	Commercial Residential			<p>1/8" x 1/8" x 1/8" Sq. For 5/16" solids &amp; engineered plank less than 3/8"</p>  <p>Spread rate approx.. 55-65 sq. ft./gal.</p>	<p>3/16" x 3/16" x 3/16" Sq. For engineered plank 3/8" to 9/16" thick and less than 5" wide and 1/2" solids</p>  <p>Spread rate approx. 35-40 sq. ft./gal.</p>
	Bamboo Solid/Engineered	Commercial Residential	Commercial Residential	Commercial Residential			<p>1/4" x 1/4" x 1/4" Sq. For engineered plank 5" or wider and 3/4" solids</p>  <p>Spread rate approx. 25-30 sq. ft./gal.</p>	<p>3/32" x 3/32" x 3/32" Sq. <b>Parquet only!</b></p>  <p>Spread rate approx. 70-80 sq. ft./gal.</p>

\* IFS and EMC adhesives come with the patented trowel blade attached to the pail lid. This blade fits into an Injecta-Blade trowel handle and is required for warranty coverage.

Adhesive spread rates are approximate depending on the method of application, trowel selection, product, and sub-floor. Further information is available on the container label or technical data sheets.



### MILLENNIUM SERIES INTELLIGENT FLOORING SYSTEM (IFS) 4014 URETHANE ADHESIVE

IFS 4014 is an installer-friendly superior grade one-part moisture cure urethane adhesive/moisture control system that also provides outstanding acoustical properties (IIC=68, IIC DELTA=21, STC=66). IFS 4014 is a single component product that is applied in a one-step application that cuts labor and material cost up to half. IFS 4014 is applied with a special design trowel that MUST be changed with each pail (new blade attached to the lid of each pail).

Packaging: 5 gal.

### MILLENNIUM SERIES EASY MOISTURE CONTROL (EMC) 4011 URETHANE ADHESIVE

EMC (Easy Moisture Control) 4011 is a premium one-part moisture cure urethane adhesive and moisture control system in a single product that reduces installation labor up to half. EMC 4011 provides both adhesion and moisture protection when applied with the patented specially designed trowel provided with each pail. EMC 4011 can be used for glue-down installations of solid, engineered, acrylic impregnated, and parquet wood flooring recommended by the wood flooring manufacturer for glue-down applications. No moisture testing is required. Sub-floor must be dry to the touch with no standing water or visible dampness.

- Controls Sub-floor MVER • One-Step Application, Saves A Day of Labor
- New Trowel With Each Pail • Excellent Coverage, 215-225 sq. ft. 5 gal.
- Low Odor • Low VOC, LEED Compliant

Packaging: 5 gal.

### MILLENNIUM SERIES 4010 URETHANE WOOD ADHESIVE

4010 has been reformulated for high performance. It bonds extremely well to most sub-floor types, including radiant heated sub-floors, concrete, terrazzo, APA approved wood sub-floors, plywood, OSB & AdvanTech, vinyl tile and non-cushioned vinyl sheet flooring that is properly prepared and fully adhered to the substrate.

- High Green Strength • Excellent Elongation - Remains Flexible
- Extensive Shelf Life • High Bond Strength • VOC Compliant • Low Odor
- Trowels Easily • California Compliant

Packaging: 5 gal.

### MILLENNIUM SERIES EASY MOISTURE CONTROL (EMC) 2011 ACRYLIC ADHESIVE

Easy-Moisture-Control EMC 2011 is an installer-friendly premium acrylic adhesive/moisture control system in a single product that cuts labor time in half, as it provides adhesion and moisture protection in one application. EMC 2011 is applied with a special design trowel.

#### APPLICATION:

EMC 2011 can be used to install 3/8" or thicker engineered wood flooring only. EMC 2011 IS NOT APPROVED FOR INSTALLING BAMBOO FLOORING, any type of bamboo construction, including vertical, horizontal or strain lamination, solid or engineered.

- Controls Sub-floor MVER • One-Step Application, Saves A Day of Labor
- New Trowel With Each Pail • Excellent Coverage, 170-180 sq. ft. 4 gal.
- Acrylic Formulation • Low VOC, LEED Compliant

Packaging: 4 gal.

### MILLENNIUM SERIES 2009 PREMIUM WOOD FLOORING ADHESIVE

2009 is the ultimate engineered wood-flooring adhesive that can be used to install domestic species solids (i.e., oak, maple, hickory, ash etc.). It is formulated with a proprietary QUAD-POLYMERIC formula for installing all wood flooring widths and thickness. It can be used over a wide variety of sub-floors.

- LEED Compliant • Advanced Engineered/Solids Wood Adhesive
- CHPS 01350 Compliant • Outstanding Initial Grab
- Installer Friendly - Trowels Exceptionally Easy

Packaging: 4 gal.

### MILLENNIUM SERIES 3016 Modified Silyl Wood Flooring Adhesive

3016 is a unique one-component Wood Floor Adhesive based on Modified Silyl Technology. It is specifically formulated to be used as an adhesive for installations that meet the manufacturer's moisture requirements or as a moisture vapor retarder to reduce the transmission of water vapor from the subfloor for the applications where moisture could impact the performance of the wood flooring.

- Bridge cracks up to 1/8" • Powerful bond
- Environmentally friendly • Easy to trowel
- Suitable for all green building projects

Packaging: 4 gal.



### MILLENNIUM SERIES 2001 FLOATING FLOOR TONGUE & GROOVE GLUE

- Water-resistant • Bonds aggressively to the wood
- Non-toxic • Easy clean-up
- One-year warranty

Coverage: 365 LF/16 oz.

Packaging: 16 oz. plastic applicator bottle



## WOOD ADHESIVES

## VITEX THICK POUR PERFECT FLOORING UNDERLAYMENT SELF-LEVELER (PFU)

PFU is a specially formulated, portland cement-based, polymer modified, pourable or pumpable, high strength compound for smoothing and repairing interior floors up to 1 ½". PFU is self-leveling and self-healing with a flow time of 15 – 20 minutes. PFU creates a hard, flat, smooth surface for the installation of a wide variety of floor covering materials.

- High strength • LEED Compliant
- Requires application of M-620 primer prior to placement
- Compatible with all flooring adhesives

Packaging: 50 lb. bag

## VITEX PARA-PATCH PLUS PATCH & SKIM COAT (PP+)

PP+ is a true multi-purpose cementitious patching compound and skim coat. PP+ is a polymer modified product that is capable of being used as a true skim coat or patch by simply adjusting the liquid-to-powder mix ratio. Designed as an "All Purpose" material for the installer who requires product consolidation without giving up quality and performance. When mixed with Parabond M-615, PP+ can be utilized as an embossing leveler, or as an encapsulant for cutback adhesives.

- Exceptional smoothness • Great coverage
- From feather edge to 1/2" • Extended pot life

Packaging: 25 lb. bag, 35 lb. pail

## VITEX MICRO FINISH

MICRO FINISH is a highly polymer-modified, cementitious-based patch, which offers precise drying characteristics. It is designed as an "all purpose" patching compound for the fast paced installer who requires product consolidation without giving up quality or performance. It may be used as a true skim coat or fill up to any thickness that may be needed to fill cracks, gouges, smooth ridges, or simple ramping to meet other transitions. It can be used over concrete, wood underlayments, properly prepared ceramic tile and adhesive residues (including encapsulation of cutback), or as an embossing leveler when mixed with M-615.

- Smooth, butter-like consistency • Trowels on easily
- Advanced drying formulation sets and dries quickly

Packaging: 10 lb. bag



## VITEX M-630 NP PRIMER

M-630 NP Primer is a blend of special polymers designed to be used as a primer for Thick Pour PFU Self Leveling Underlayment over non-porous substrates. This product is Not Freeze-Thaw stable, therefore, **PROTECT FROM FREEZING.**

- Non-hazardous • Easy to use • Low odor
- Approved for Non-Porous Substrates • Fast Drying

Packaging: 2 gal.



## VITEX M-620 PRIMER

M-620 Primer is a blend of special polymers and chemical modifiers designed to be used as a primer for Parabond Thick Pour PFU Self Leveling Underlayment. M-620 may also be used as a substrate primer to enhance bond strength of patching, leveling and skim coating as well as reduction of the porosity of some substrates. This product is Not Freeze-Thaw stable, therefore, **PROTECT FROM FREEZING.**

- Non-hazardous • Low odor • Moisture resistant when dry
- Does not promote mold and mildew growth

Packaging: 1 gal.



## VITEX M-615 LATEX

M-615 (referred to as latex milk) is a blend of latex-emulsions and chemical modifiers that has been specially formulated for addition to Parabond patching compounds and Underlayment systems. M-615 when used in lieu of water will significantly improve the bond strength and flexibility of floor patching compounds. M-615 can be used as a vinyl embossing leveler or as an encapsulant for cutback adhesive when mixed with Para-Patch Plus, or Micro Finish (Do Not Dilute With Water).

- Non-hazardous • Low odor • Moisture resistant when dry
- Will not promote mold or mildew growth • Fast drying • Water clean up

Packaging: 1 gal., 4 gal.





### VITEX M-605 GYPSUM PATCH

M-605 w/Additive is a premium quality, fast setting gypsum-based patching compound. M-605 is non-swelling, non-shrinking, and is formulated in such a manner that it will not breed or support the growth of mold, mildew or fungus, which can lead to staining the wear layer of vinyl sheet goods. M-605 has a dry compressive strength in excess of 3,000 psi.

- Does not contain starch
- Meets ASTM G21 fungal standards
- Water and alkali resistant
- LEED Compliant

Packaging: 25 lb. bag



### MVR 8000 Moisture Vapor Reducer

MVR 8000 is a polymer-based, solvent-free product that will reduce vapor emission levels on properly prepared concrete slabs from up to 12lbs or 90% RH to levels acceptable for installation of floor covering when used as directed. MVR 8000 was developed for use on “Green” concrete slabs in fast track construction. The use of MVR 8000 allows the flooring contractor to install the flooring in as little as 28 days.

Packaging: 4 gal.



### VITEX M-600 MULTI-PURPOSE PATCH & UNDERLAYMENT

M-600 is a polymer-modified, cementitious patching compound formulated to be mixed with water or latex additive. It is quick setting (20-30 minutes), fast drying (normally one hour) and will not shrink. M-600 is moisture resistant and will not breed or support mildew or fungus.

- High polymer concentration for improved resistance
- For use on below, on or above grade concrete and wood surfaces
- Can be used over old cutback residue and as an embossing leveler
- LEED Compliant

Packaging: 25 lb. bag





### M-2850 OUTDOOR AND INDOOR CARPET ADHESIVE

M-2850 is a premium performance solvent-free outdoor adhesive with the high performance M-2850 is highly recommended for the installation of Urethane foam backed turf, Unitary backed, and artificial grass carpet. M-2850 is a highly water resistant solvent-free adhesive designed for outdoor or indoor use. M-2850 can be used to install outdoor carpet on boats and outside living areas. Not recommended for vinyl backed flooring of any kind.

- Solvent free • Highly water resistant • Exceptional Bond
- CRI-GLP Certified

Packaging: 4 gal.



### DETACH II FLOORING REMOVER

DETACH II is a quick and effective concentrated solution when applied to most floor covering breaks down the adhesive bond allowing for the easy removal and disposal. It also solubilizes the adhesive (aqueous latex based) remaining on the substrate for easy removal. DETACH will not affect the adhesive of the re-installation if allowed to dry completely.

Packaging: 5 gal.



### M-4259 SOLV-FREE LATEX-BASED CARPET PAD ADHESIVE

M-4259 Is a latex-based adhesive used for bonding carpet pad to porous substrates prior to carpet installation. It is a fast-setting adhesive which holds padding in place so carpet can be installed quickly.

- Non-hazardous - VOC Compliant • Low odor/odorless when dry
- Fast setting • Water resistant

Packaging: 1 gal.



### M-363 ALL PURPOSE SEAM SEALER/TACK STRIP ADHESIVE (NONFLAMMABLE)

M-363 is recommended for seaming many types of carpet in a direct glue down installation, double glue down applications, and stretch-in installation involving synthetic backings. Not recommended for vinyl backing.

- High strength • Fast grab
- Quick drying • Low odor/odorless when dry

Packaging: 1 qt.



### M-355 HIGH PERFORMANCE GENERAL PURPOSE ADHESIVE

M-355 is designed to perform on a multitude of substrates such as high pressure laminates, wood, polyurethane foams, fabrics, paper and many others. Its unique lace spray pattern offers low soak-in for better adhesion and extended coverage. It has a fan tip for controlled placement of the glue.

Note: M-355 is not recommended for post-forming laminates or for use on vinyl accessory products such as reducer strips, vinyl stair nosings, etc.

- Fast tack • Excellent green strength • Excellent heat resistance

Packaging: 17 fl. oz. can



### M-4263 SOLV-FREE CARPET/UNIVERSAL SEAM ADHESIVE

M-4263 is a solvent-free universal carpet seam adhesive for all types of carpet backings in direct glue down installations, including vinyl backed.

- Solvent-free - VOC compliant • Non-hazardous
- Fast drying/dries clear • Approved for Cushion backed sheet vinyl
- Easy application/water clean-up • Freeze-thaw stable
- Non-flammable • Contains UV Tracer

Packaging: 8 oz. plastic applicator bottle, 32 oz. plastic applicator bottle.




### M-267 PREMIUM LATEX CARPET EDGE SEALER

M-267 is a natural latex adhesive designed for the application of carpet seaming and reinforcing tapes. It may also be used for replacing damaged or burned nap, sealing raw edges, strengthening worn backing and joining padding.

M-267 is extremely fast drying, easy spreading, non-toxic, non-flammable and colorless when dry. Bonding strength increases with age and will not deteriorate after shampooing.

- Non-hazardous - VOC Compliant • Fast drying • High solids

Packaging: 1 qt., 1 gal.

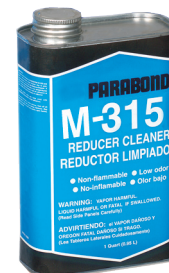

### M-315 REDUCER/CLEANER (NONFLAMMABLE)

M-315 is a reducer or thinner used to restore the normal consistency to M-363 contact adhesive and to clean brushes, rollers and tools used with M-363.

- Nonflammable • Low odor/odorless when dry

Packaging: 1 qt.



### M-260 CARPET PAD ADHESIVE (EXTREMELY FLAMMABLE)

M-260 is an Extremely Flammable solvent-based pad adhesive that is recommended for permanently fastening carpet padding over any approved flooring surface. M-260 has good initial tack and high strength to prevent movement of padding during stretching or subsequent use.

- Strong initial tack
- High strength
- Low odor/odorless when dry
- Freeze/thaw stable

Packaging: 1 gal.



### M-250 PREMIUM BRUSH GRADE CONTACT CEMENT (EXTREMELY FLAMMABLE)

M-250 is a brush/roller coat neoprene contact adhesive developed for multiple uses. As a general purpose industrial type adhesive, the M-250 can be used for non-structural bonding of wood, metal, rubber, leather, canvas, rigid polyurethane foam, paper honeycomb and many other porous and non-porous surfaces.

- High solids, fast drying
- Brush/roller application
- Superior bond strength

Packaging: 1 qt., 1 gal., 5 gal.



### M-163 SEAM ADHESIVE (EXTREMELY FLAMMABLE)

M-163 is recommended for use in seaming all types of carpet in direct glue down installations, excluding PVC vinyl backs. M-163 should also be used for double stick applications and installations to be stretched in over pad.

- Strong bond
- Fast grabbing
- Quick drying
- Low odor
- Cleans up easily with Mineral Spirits
- Does not contain UV tracers

Packaging: 1 qt.

# VOC Compliant



### V-260 CARPET PAD ADHESIVE (EXTREMELY FLAMMABLE)

Parabond V-260 Carpet Pad Adhesive is an Extremely Flammable solvent based pad adhesive that is VOC Compliant and is recommended for permanently fastening carpet padding over any approved flooring surface. V-260 has good initial tack and high strength to prevent movement of padding during stretching or subsequent use.

V-260 Pad Adhesive is both California and OTC Compliant for VOC's.

- Strong Initial Tack
- High Strength
- Odorless When Dry

Packaging: 1 gal.



### V-250 BRUSH GRADE CONTACT CEMENT (EXTREMELY FLAMMABLE)

Parabond V-250 is a VOC Compliant, brush/roller coat, contact adhesive developed for bonding multiple products to most substrates. This contact cement can be used to install non-porous textiles to both porous and non-porous substrates. It can be used for non-structural bonding of wood, metal, rubber, leather, canvas, rigid polyurethane foam, paper honeycomb and many other products. V-250 Contact Cement is both California and OTC Compliant for VOC's.

- Fast Drying
- Brush / Roller Application
- Strong Bond

Packaging: 1 gal.






# Royal Vinyl Flooring Adhesive

Approved For:



Vinyl  
Composition Tile




Vinyl Stair Treads  
& Radial Tiles

Vinyl Backed  
Sheet Vinyl



Luxury Vinyl Tile,  
Vinyl Tile &  
Vinyl Plank



Good for concrete substrates up to 10 lb's and 90% Rh.

Your Adhesive and Sealant Solution...

**PARABOND<sup>®</sup>**  
THE ONLY WORD FOR ADHESIVES



[www.parabond.com](http://www.parabond.com)



**R O Y A L**

---

**ADHESIVES & SEALANTS**

**Royal Adhesives & Sealants LLC**

863 SE Main Street

Simpsonville, SC 29681

Tel: 800-763-7272 Ext. 1

[www.royaladhesives.com](http://www.royaladhesives.com)

[www.parabond.com](http://www.parabond.com)

[customerservice@rascp.com](mailto:customerservice@rascp.com)