



HARDMAN

ADHESIVES

ONE-SHOT, JOB SIZE PACKAGES

For Repair, Maintenance
and Production

1999
The Best
Job Adhesive

FOR BONDING METALS, WOOD, GLASS, CERAMICS, CONCRETE, PLASTICS,
RESINS, COMPOSITES, LEATHER, GUM, STONE AND MORE!



Standard DOUBLE/BUBBLE Products

Epoxy Adhesives



Urethane Adhesives



Silicone Adhesives




Hand Cleanser





Golf DOUBLE/BUBBLE

- Golf DOUBLE/BUBBLE
 - Shafting of golf clubs
 - EPOWELD 3243 Ivory
 - EPOWELD 3243 Black
 - EPOWELD 16822 Black

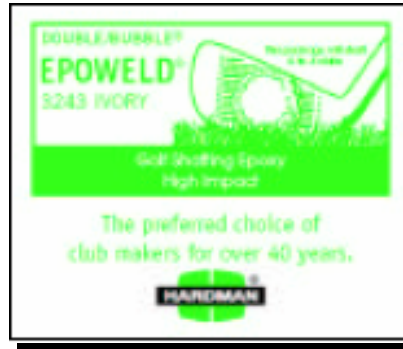



Striking Tool and General Repair DOUBLE BUBBLE

- Striking
DOUBLE/BUBBLE
 - Hammers and axes
 - General repairs
 - 28 gram (1 oz.) packet

The image shows a yellow rectangular label for the product. At the top center is the HARDMAN logo. Below it, the product name 'DOUBLE/BUBBLE' is written in large, bold, blue letters. Underneath that, 'EPOXY ADHESIVE' and 'ADHESIVO EPÓXICO' are written in red. On the left side, there is a vertical column of text: 'GENERAL PURPOSE AND STRIKING TOOL ADHESIVE'. On the right side, there is another vertical column: 'ADHESIVO GENERAL Y PARA ENSAMBLAJE DE HERRAMIENTAS DE GOLPEO'. At the bottom of the label, there are two columns of text providing detailed information in English and Spanish.

<p>GENERAL PURPOSE AND STRIKING TOOL ADHESIVE</p>	<p>HARDMAN</p> <p>DOUBLE/BUBBLE</p> <p>EPOXY ADHESIVE</p> <p>ADHESIVO EPÓXICO</p>	<p>ADHESIVO GENERAL Y PARA ENSAMBLAJE DE HERRAMIENTAS DE GOLPEO</p>
<p>DESCRIPTION: Single-use epoxy adhesive. Bonds to metal, wood, ceramics, fiberglass, hard plastics, glass, stone and concrete.</p> <p>TYPICAL USES: Bonding of hammer and ax heads to handles. General purpose adhesive for assembly, maintenance and repair.</p> <p>PROPERTIES: Work time: 90 minutes Viscosity: 8,000 cPs (honey ~ 10,000 cPs) Color: Amber Cure time: 24 hours</p>	<p>DESCRIPCIÓN: Adhesivo epóxico de un solo uso. Se adhiere al metal, madera, cerámica, fibra de vidrio, plásticos duros, vidrio, piedra y concreto.</p> <p>USOS TÍPICOS: Pegado de cabezas de martillos y hachas a los mangos. Adhesivo de propósito general para ensamblaje, mantenimiento y reparación.</p> <p>PROPIEDADES: Tiempo de manejo: 90 minutos Viscosidad: 8,000 cPs (miel ~ 10,000 cPs) Color: Ámbar Tiempo de curado: 24 horas</p>	



Private Label Opportunities

- Put Your Company Logo on Our Products or Yours!

