

# RV7-S20W/D20W



- 1" x 1" Package
- Wide 4:1 Input Range
- Soft Start
- No Minimum Load Required
- Adjustable Output Voltage
- Over Current Protection
- Over Voltage Protection
- 1600VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 89%
- Operating Temperature Range -40° ~ +75°C
- Remote On/Off Control (CTRL)

RoHS



OUTPUT SPECIFICATION		Switching Frequency: 330kHz, typ.	
Voltage accuracy: ±1%		Humidity: 95% rel H	
Output Voltage Adjustability (Trim): Singel Output: ±10% max.		Reliability Calculated MTBF : > 560khrs (MIL-HDBK-217 f)	
Line regulation: Single & Dual ±0.5% max.		Safety Standard: (designed to meet): IEC 60950-1	
LOAD REGULATION: Singel: ±0.5% max.		ENVIRONMENTAL SPECIFICATION	
Dual: ±1%,max.(balanced load)		Operating Temperature range: -40°C ~+75°C (see Derating Curve)	
Cross Regulation (Dual Output): ±5%		Maximum Case Temperature: 105°C	
Over Voltage Protection (Zener diode clamp):		Storage Temperature : -55°C ~+125°C	
Over Current Protection: 140% of FI, typ.		Cooling : Nature Convection	
Short Circuit Protection : Indefinite (hiccup) (Automatic Recovery)		PHYSICAL SPECIFICATIONS:	
Ripple noise (20Mhz bandwidth): 75-100mV pk-pk max.		Base Material: Non-conductive Black Plastic (UL94V-0 rated)	
Temperature coefficient: ±0.02%/°C		Case Material: Nickel-coated Coppe	
Capacitor load: See table		PIN Material: 1.0mm Brass Solder coated	
Transient Recovery Time: 250us, typ.		Potting Material: Epoxy (UL94V-0 rated)	
Transient Response: ( Deviation) ±3% max.		Weight Case-DIP: 19.0g	
INPUT SPECIFICATIONS		Dimmension DIP: 1.00" x 1.00" x 0.40"	
Voltage Range: See table		ABSOLUTE MAXIMUM RATINGS (1)	
Start up Time: 30ms, typ.		Input Surge Voltage (100ms)/	
No-Load/Full-Load Input Current: See table		24V Models: 50VDC max.	
Input Filter: PI Type		48V Models: 100VDC max.	
Input Reflected Ripple Current : 30mA pk-pk		Soldering Temperature: 260°C max. (2)	
Remote On/Off (positive logic): On: 3.0~12VDC or open circuit,		EMC SPECIFICATIONS	
OFF: 0~1.2VDC or Short circuit pin 2 and 3		Radiated-/Conducted Emissions: EN55022 Class A (see EMI Filter note)	
OFF idle current: 5mA typ.		ESD: IEC 61000-4-2 Perf.Criteria A	
GENERAL SPECIFICATIONS		RS: IEC 61000-4-3 Perf.Criteria A	
Efficiency: See table typ.		EFT: IEC 61000-4-4 Perf.Criteria A	
I/O Isolation Voltage (60sec): 1600VDC		SURGE: IEC 61000-4-5 Perf.Criteria A	
Input/Output: 1600VDC		CS: IEC 61000-4-6 Perf.Criteria A	
Case/Input & Output: 1600VDC		PFMF: IEC 61000-4-8 Perf.Criteria A	
I/O Isolation Capacitance: 1500pF typ.			
I/O Isolation Resistance: 1000M Ohm			

1) These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability. 2) (1.5mm from case 10sec Max.) 3) All specifications typical at TA= 25°C, nominal input voltage and full load unless otherwise specified. 4) The information and specification contained in this data sheet are believed to be correct at time of publication. However RSG accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice.=

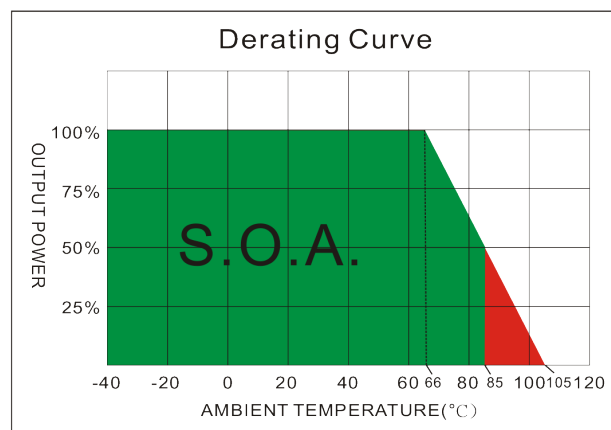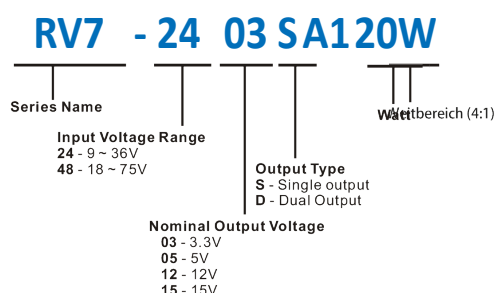


## MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RV7-2403S20A1W	9-36	50	703	3.3	0	4500	88	10000
RV7-2405S20A1W	9-36	50	936	5	0	4000	89	5000
RV7-2412S20A1W	9-36	22	936	12	0	1670	89	850
RV7-2415S20A1W	9-36	22	936	15	0	1330	89	700
RV7-4803S20A1W	18-75	30	352	3.3	0	4500	88	10000
RV7-4805S20A1W	18-75	30	468	5	0	4000	89	5000
RV7-4812S20A1W	18-75	15	468	12	0	1670	89	850
RV7-4815S20A1W	18-75	15	468	15	0	1330	89	700
RV7-2412D20A1W	9-36	25	936	±12	0	±833	89	±470
RV7-2415D20A1W	9-36	25	936	±15	0	±667	89	±330
RV7-4812D20A1W	18-75	15	468	±12	0	±833	89	±470
RV7-4815D20A1W	18-75	15	468	±15	0	±667	89	±330

1. One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
2. Measured with a 1.0uF ceramic capacitor and 10uF tantalum capacitor.
3. Tested by minimal Vin and constant resistive load.
4. Tested by normal Vin and 25% load step change ( 75%-50%-25% of Io ).
5. Measured Input reflected ripple current with a simulated source inductance of 12uH and a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz).
6. The remote on/off control pin is referenced to -Vin(pin2).
7. "Nature Convection" is usually about 30-65 LFM but is not equal to still air (0 LFM).
8. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
9. Input filter meets EN 55022 Class A without external components.
10. An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5. The filter capacitor RSG suggest: Nippon chemi-con KY series, 220uF/100V.


### Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor  $L_{in}$  (12uH) and a source capacitor  $C_{in}$  (47uF, ESR<1.0 $\Omega$  at 100KHz) at nominal input and full load.

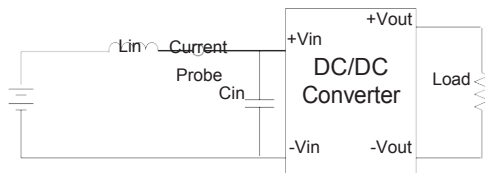


### Output Ripple & Noise Measurement Test

Measured with a 1.0uF MLCC capacitor and a 10uF tantalum capacitor. The Scope measurement bandwidth is 0-20MHz.

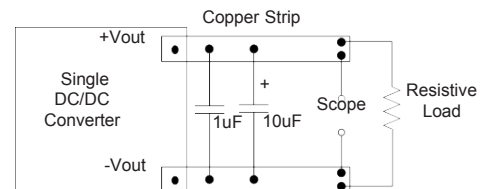


### Output Ripple & Noise Reduction

To reduce ripple and noise, it is recommended to use a 1uF ceramic disk capacitor and a 10uF electrolytic capacitor to at the output.

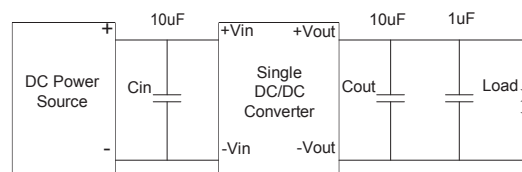

### CTRL Module ON / OFF

Positive logic turns on the module during high logic and off during low logic. Ctrl module on/off can be controlled by an external switch between the ctrl terminal and -Vin terminal. The switch can be an open collector or open drain. For positive logic if the ctrl feature is not used, please leave the ctrl pin floating.

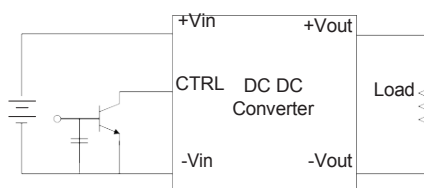

### Over Voltage Protection


The module includes an internal output over voltage protection circuit, which monitors the voltage on the output terminals. If this voltage exceeds the over voltage set point, the module will activate the control loop of internal circuit to clamp the output voltage.

### Over Current Protection

The module includes an internal over current protection circuit, which will endure current limiting for an unlimited duration during output over load condition. If the output current exceeds the OCP set point, the module will shut down automatically (hiccup).

The module will try to restart after shut down. If the over load condition still exists, the module will shut down again.

MECHANICAL SPECIFICATIONS

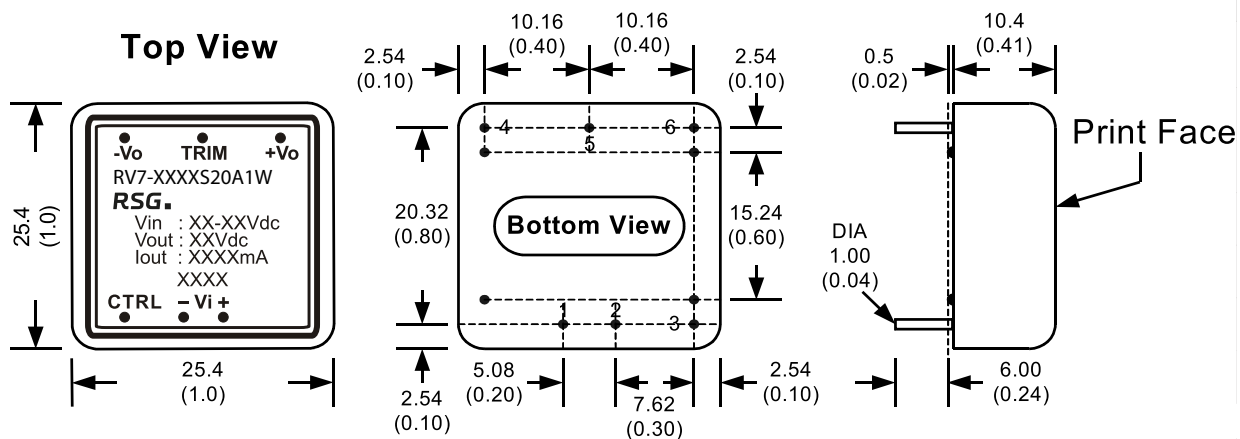

All dimensions are typical in millimeters ( inches ).

1. Pin diameter:  $1.0 \pm 0.05$  (  $0.04 \pm 0.002$  )
2. Pin pitch and length tolerance:  $\pm 0.35$  (  $\pm 0.014$  )
3. Case Tolerance:  $\pm 0.5$  (  $\pm 0.02$  )
4. Stand-off tolerance:  $\pm 0.1$  (  $\pm 0.004$  )

PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	CTRL	CTRL
4	+Vout	+Vout
5	Trim	Com
6	-Vout	-Vout

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method as below. (single output models only )

