


RR4-S03/D03

- 24 Pin DIL Package
- Wide 2:1 Input Range
- 1500VDC Isolation
- Up to 3500VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 82%
- Operating Temperature Range
-40° ~ +85°C
- Metal Case Standard , Optional Plastic Case

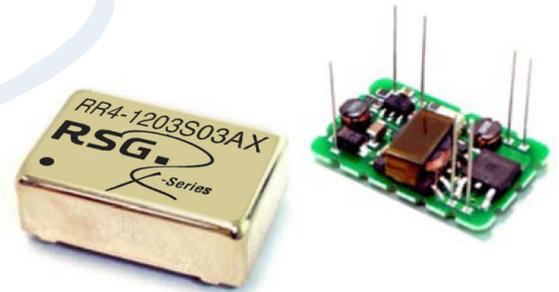

RoHS

OUTPUT SPECIFICATION	ENVIRONMENTAL SPECIFICATION
Voltage accuracy: ±1%	Operating Temperature range: -40°C ~+85°C (see Derating Curve)
Line regulation: Single & Dual ±0.5% max.	Maximum Case Temperature: 100°C
LOAD REGULATION: ±0.5%	Storage Temperature : -40°C ~+125°C
Output 3.3V Model: ±1.5%	Cooling : Nature Convection
Short Circuit Protection : Indefinite (Automatic Recovery)	PHYSICAL SPECIFICATIONS:
Ripple noise (20Mhz bandwidth): 60mV pk-pk	Case Material: Nickel-coated Copper
Temperature coefficient: ±0.02% °C	Base Material: Non-conductive Black Plastic (UL94V-0 rated)
Capacitor load: See table	PIN Material: Ø 0.5mm Brass Solder coated
INPUT SPECIFICATIONS	Potting Material: Epoxy (UL94V-0 rated)
Voltage Range: See table	Weight Case-DIP: 13.5g (plastic), 17.0g (Metal)
Max. Input Current: See table	Dimension DIP: 1.25" x 0.8" x 0.4"
No-Load/Full-Load Input Current: See table	ABSOLUTE MAXIMUM RATINGS (1)
Input Filter: PI Type	Input Surge Voltage (100ms)/
Input Reflected Ripple Current : 35mA pk-pk	12V Models: 24VDC max.
GENERAL SPECIFICATIONS	24V Models: 40VDC max.
Efficiency: See table typ.	48V Models: 80VDC max.
I/O Isolation Voltage Metal Case (3 sec.): 1000VDC	Soldering Temperature: 260°C max. (2)
I/O Isolation Voltage (3 sec.): 1000 ~ 3500VDC	EMC SPECIFICATIONS
I/O Isolation Capacitance: 500pF typ.	Radiated-/Conducted Emissions: EN55022 Class A (see EMI Filter note)
I/O Isolation Resistance: 1500M Ohm	ESD: IEC 61000-4-2 Perf.Criteria A
Switching Frequency: 266kHz, typ.	RS: IEC 61000-4-3 Perf.Criteria A
Humidity: 95% rel H	EFT: IEC 61000-4-4 Perf.Criteria A
Reliability Calculated MTBF : > 1.21Mhrs (MIL-HDBK-217 f)	SURGE: IEC 61000-4-5 Perf.Criteria A
Safety Standard: (designed to meet): IEC 60950-1	CS: IEC 61000-4-6 Perf.Criteria A
	PFMF IEC 61000-4-8 Perf.Criteria A



1) These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

2) (1.5mm from case 10sec Max.)

3) All specifications typical at TA= 25°C, nominal input voltage and full load unless otherwise specified.

4) The information and specification contained in this data sheet are believed to be correct at time of publication. However RSG accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice.

NUMBER STRUCTURE

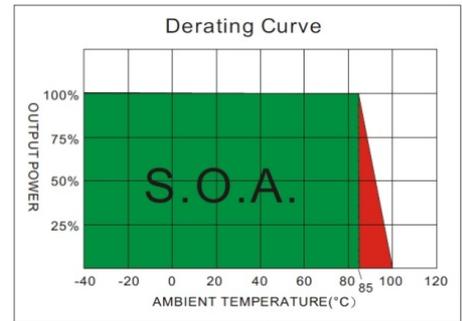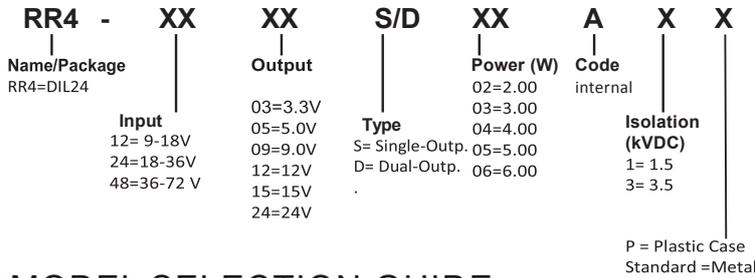

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(µF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RR4-1203S03AX	9-18	22	343	3.3	0	900	72	470
RR4-1205S03AX	9-18	22	328	5	0	600	76	470
RR4-1209S03AX	9-18	22	320	9	0	333	78	68
RR4-1212S03AX	9-18	22	312	12	0	250	80	47
RR4-1215S03AX	9-18	22	312	15	0	200	80	47
RR4-1224S03AX	9-18	22	313	24	0	125	80	22
RR4-1203D03AX	9-18	22	343	±3.3	0	±450	72	±220
RR4-1205D03AX	9-18	22	328	±5	0	±300	76	±220
RR4-1209D03AX	9-18	22	312	±9	0	±167	80	±33
RR4-1212D03AX	9-18	22	312	±12	0	±125	80	±22
RR4-1215D03AX	9-18	22	312	±15	0	±100	80	±22
RR4-1224D03AX	9-18	22	313	±24	0	±63	80	±10
RR4-2403S03AX	18-36	12	171	3.3	0	900	72	470
RR4-2405S03AX	18-36	12	164	5	0	600	76	470
RR4-2409S03AX	18-36	12	160	9	0	333	78	68
RR4-2412S03AX	18-36	12	156	12	0	250	80	47
RR4-2415S03AX	18-36	12	152	15	0	200	82	47
RR4-2424S03AX	18-36	12	153	24	0	125	82	22
RR4-2403D03AX	18-36	12	171	±3.3	0	±450	72	±220
RR4-2405D03AX	18-36	12	160	±5	0	±300	78	±220
RR4-2409D03AX	18-36	12	156	±9	0	±167	80	±33
RR4-2412D03AX	18-36	12	152	±12	0	±125	82	±22
RR4-2415D03AX	18-36	12	152	±15	0	±100	82	±22
RR4-2424D03AX	18-36	12	153	±24	0	±63	82	±10
RR4-4803S03AX	36-72	8	86	3.3	0	900	72	470
RR4-4805S03AX	36-72	8	82	5	0	600	76	470
RR4-4809S03AX	36-72	8	80	9	0	333	78	68
RR4-4812S03AX	36-72	8	78	12	0	250	80	47
RR4-4815S03AX	36-72	8	78	15	0	200	80	47
RR4-4824S03AX	36-72	8	78	24	0	125	80	22
RR4-4803D03AX	36-72	8	86	±3.3	0	±450	72	±220
RR4-4805D03AX	36-72	8	82	±5	0	±300	76	±220
RR4-4809D03AX	36-72	8	80	±9	0	±167	78	±33
RR4-4812D03AX	36-72	8	78	±12	0	±125	80	±22
RR4-4815D03AX	36-72	8	78	±15	0	±100	80	±22
RR4-4824D03AX	36-72	8	78	±24	0	±63	80	±10

Suffix "3" means 3.5KVdc isolation
Suffix "P" means Plastic case instead of standard Metal Case


NOTE

1. Ripple/Noise measured with a 1uF ceramic capacitor.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Input filter components are be required to help meet conducted emission class A, which application refer to the EMI Filter of design & feature configuration.
6. An external filter capacitor is required if the module has to meet IEC 61000-4-4 and IEC 61000-4-5. The filter capacitor RSG suggest: Nippon - chemi- con KY series, 220uF/100V.

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12uH) and a source capacitor C_{in} (47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.

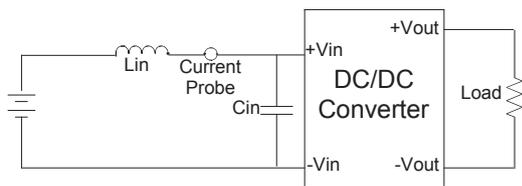


Output Ripple & Noise Measurement Test

Use a capacitor C_{out} (1.0uF) measurement. The Scope measurement bandwidth is 0-20MHz.

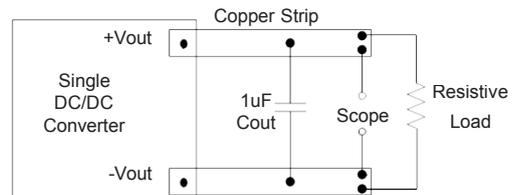


EMI Filter

Input filter components (C_1 , L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

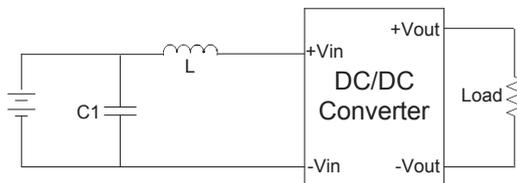


C1	L
100uF, 100V	12uH

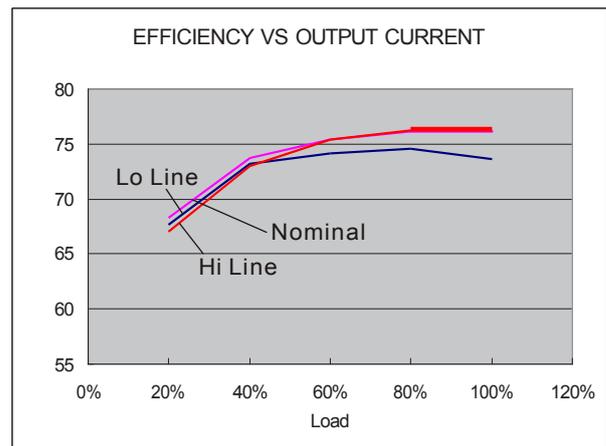

12 Models

RR4-S03/D03

MECHANICAL SPECIFICATIONS

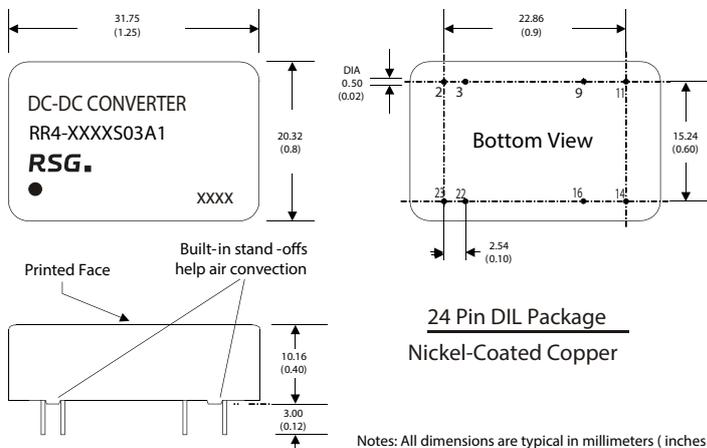


24 Pin DIL Package
Nickel-Coated Copper

- Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ±0.05 (0.02 ±0.002)
 2. Pin pitch and length tolerance: ±0.35 (±0.014)
 3. Case Tolerance: ±0.5 (±0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

MECHANICAL SPECIFICATIONS

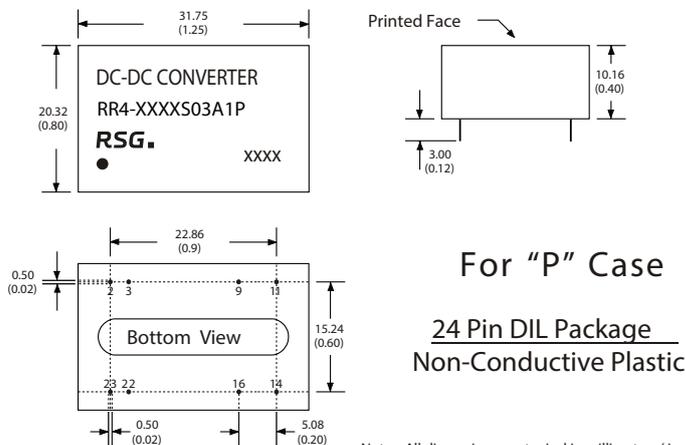

For "P" Case
24 Pin DIL Package
Non-Conductive Plastic

- Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ±0.05 (0.02 ±0.002)
 2. Pin pitch and length tolerance: ±0.35 (±0.014)
 3. Case Tolerance: ±0.5 (±0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

The models listed here are just standard type. If you need a product with special specification or you have questions regarding packing standards (Tube oder Tape/Reel) as well as application support, please contact our specialists: sales@rsg-electronic.de or +49 69-984047-41/-28

STAND Juni 2016 Rev 01