

RR7-S06/D06

- 24 Pin DIL Package
- Wide 4:1 Input Range
- 1500VDC Isolation
- Up to 3500VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 84%
- Operating Temperature Range
-40° ~ +85°C
- Metal Case Standard , Optional Plastic Case
- EMI Complies With EN55022 Class A



RoHS

OUTPUT SPECIFICATION

Voltage accuracy:	±1%
Line regulation:	Single & Dual ±0.5% max.
LOAD REGULATION:	±0.5%
	Output 3.3V Model: ±1.5%
Short Circuit Protection :	Indefinite (Automatic Recovery)
Ripple noise (20Mhz bandwidth):	60mV pk-pk
Temperature coefficient:	±0.02% °C
Capacitor load:	See table

INPUT SPECIFICATIONS

Voltage Range:	See table
Max. Input Current:	See table
No-Load/Full-Load Input Current:	See table
Input Filter:	PI Type

GENERAL SPECIFICATIONS

Efficiency:	See table typ.
I/O Isolation Voltage Metal Case (3 sec.):	1000VDC
I/O Isolation Voltage (3 sec.):	1500 ~ 3500VDC
I/O Isolation Capacitance:	500pF typ.
I/O Isolation Resistance:	1000M Ohm
Switching Frequency:	266kHz, typ.
Humidity:	95% rel H
Reliability Calculated MTBF :	> 1.21Mhrs (MIL-HDBK-217 f)
Safety Standard: (designed to meet):	IEC 60950-1

ENVIRONMENTAL SPECIFICATION

Operating Temperature range:	-40°C ~+85°C (see Derating Curve)
Maximum Case Temperature:	100°C
Storage Temperature :	-40°C ~+125°C
PHYSICAL SPECIFICATIONS:	
Case Material:	Nickel-coated Copper
Base Material:	Non-conductive Black Plastic (UL94V-0 rated)
PIN Material:	Ø 0.5mm Brass Solder coated
Potting Material:	Epoxy (UL94V-0 rated)
Weight Case-DIP:	13.5g (plastic), 17.0g (Metal)
Dimmension DIP:	1.25" x 0.8" x 0.4"

ABSOLUTE MAXIMUM RATINGS (1)

Input Surge Voltage (100ms)/	
24V Models:	40VDC max.
48V Models:	80VDC max.
EMC SPECIFICATIONS	
Soldering Temperature:	260°C max. ⁽²⁾
Radiated-/Conducted Emissions:	EN55022 Class A
ESD:	IEC 61000-4-2 Perf.Criteria A
RS:	IEC 61000-4-3 Perf.Criteria A
EFT:	IEC 61000-4-4 Perf.Criteria A
SURGE:	IEC 61000-4-5 Perf.Criteria A
CS:	IEC 61000-4-6 Perf.Criteria A
PFMF	IEC 61000-4-8 Perf.Criteria A

1) These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

2) (1.5mm from case 10sec Max.)


3) All specifications typical at TA= 25°C, nominal input voltage and full load unless otherwise specified.

4) The information and specification contained in this data sheet are believed to be correct at time of publication. However RSG accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice.

RR7-S06/D06

NUMBER STRUCTURE

RR7 -	XX	XX	S/D	XX	A	X	X
Name/Package		Output		Power (W)	Code		
RR7=DIL24					internal		
Input		Type			Isolation (kVDC)		
24= 9-36V	03=3.3V	S= Single-Outp.	02=2.00	1= 1.5			
48=18-72 V	05=5.0V	D= Dual-Outp.	03=3.00	3= 3.5			
	07=7.2V		04=4.00				
	09=9.0V		05=5.00				
	12=12V		06=6.00				
	15=15V						
	18=18V						
	24=24V						
					P = Plastic Case		
					Standard =Metal		

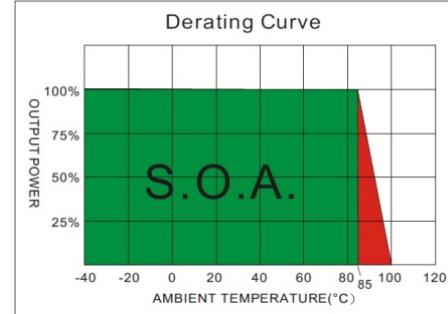

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RR7-2403S06AX	9-36	12	253.3	3.3	0	1400	76	1000
RR7-2405S06AX	9-36	10	312.5	5	0	1200	80	1000
RR7-2407S06AX	9-36	18	312.5	7.2	0	833	80	470
RR7-2409S06AX	9-36	12	301.2	9	0	666	83	220
RR7-2412S06AX	9-36	15	301.2	12	0	500	83	1000
RR7-2415S06AX	9-36	18	301.2	15	0	400	83	470
RR7-2418S06AX	9-36	15	301.2	18	0	333	83	47
RR7-2424S06AX	9-36	18	304.9	24	0	250	82	47
RR7-2403D06AX	9-36	12	337.8	±3.3	0	±909	74	±470
RR7-2405D06AX	9-36	10	312.5	±5	0	±600	80	±680
RR7-2407D06AX	9-36	18	312.5	±7.2	0	±416	80	±220
RR7-2409D06AX	9-36	18	308.64	±9	0	±333	81	±100
RR7-2412D06AX	9-36	20	301.2	±12	0	±250	83	±330
RR7-2415D06AX	9-36	22	304.9	±15	0	±200	82	±100
RR7-2418D06AX	9-36	18	304.9	±18	0	±166	82	±10
RR7-2424D06AX	9-36	18	312.5	±24	0	±125	80	±22
RR7-4803S06AX	18-72	15	126.4	3.3	0	1400	76	1000
RR7-4805S06AX	18-72	8	156.25	5	0	1200	80	1000
RR7-4807S06AX	18-72	15	156.25	7.2	0	833	80	470
RR7-4809S06AX	18-72	10	152.43	9	0	666	82	220
RR7-4812S06AX	18-72	10	150.6	12	0	500	83	1000
RR7-4815S06AX	18-72	10	148.8	15	0	400	84	100
RR7-4818S06AX	18-72	10	150.6	18	0	333	83	10
RR7-4824S06AX	18-72	12	150.6	24	0	250	83	22
RR7-4803D06AX	18-72	10	162.3	±3.3	0	±909	77	±470
RR7-4805D06AX	18-72	10	158.22	±5	0	±600	79	±680
RR7-4807D06AX	18-72	15	156.25	±7.2	0	±416	80	±220
RR7-4809D06AX	18-72	15	154.32	±9	0	±333	81	±100
RR7-4812D06AX	18-72	10	152.4	±12	0	±250	82	±330
RR7-4815D06AX	18-72	15	148.8	±15	0	±200	84	±100
RR7-4818D06AX	18-72	15	156.25	±18	0	±166	80	±10
RR7-4824D06AX	18-72	15	154.3	±24	0	±125	81	±22


Suffix "3" means 3.5KVdc isolation

Suffix "P" means Plastic case instead of standard Metal Case

1. Ripple/Noise measured with a 1uF ceramic capacitor.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. It's recommended to add (C1, C2, L) in input end to achieve EN55022 conducted Class A.
5. An external filter capacitor is required if the module has to meet IEC61000-4-5.
The filter capacitor RSG suggest: Nippon - chemi - con KY series, 220uF/100V.
6. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.


Output Ripple & Noise Measurement Test

Use a capacitor Cout(1.0uF) measurement.
The Scope measurement bandwidth is 0-20MHz.

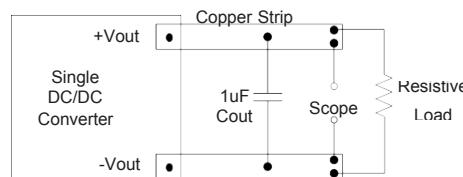


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor Lin(12uH) and a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.

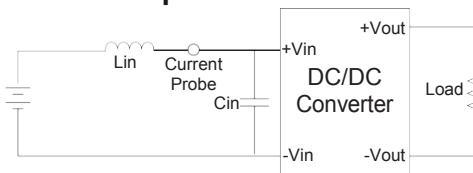


EMI Filter

Input filter components (C1,C2, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

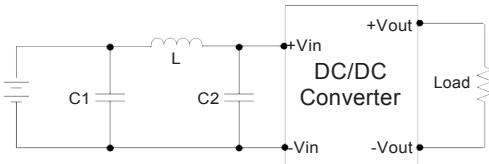


C1	L	C2
68uF, 100V	12uH	33uF, 100V

EFFICIENCY VS OUTPUT CURRENT

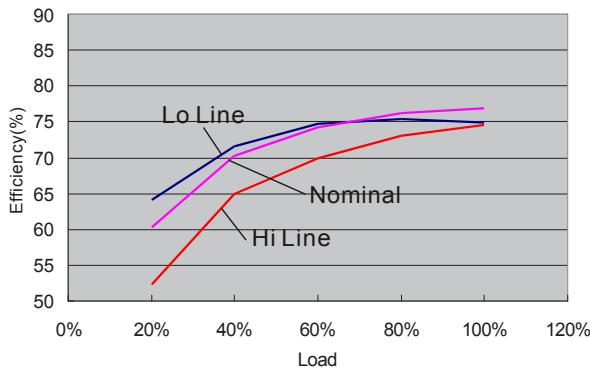



24 Models

EFFICIENCY VS OUTPUT CURRENT

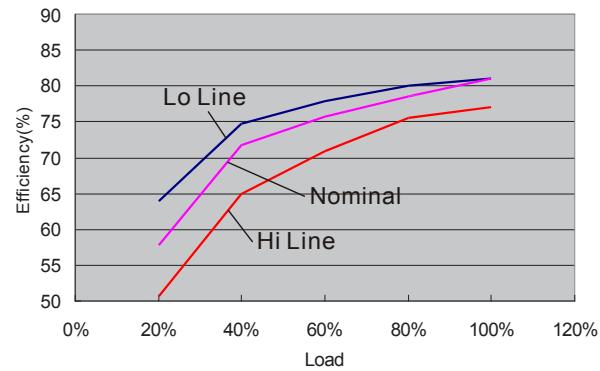

48 Models

MECHANICAL SPECIFICATIONS

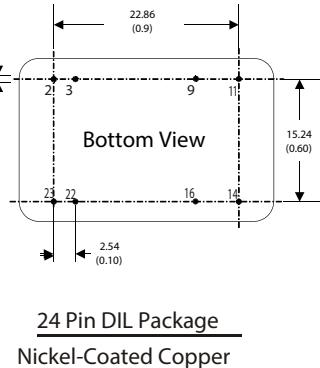
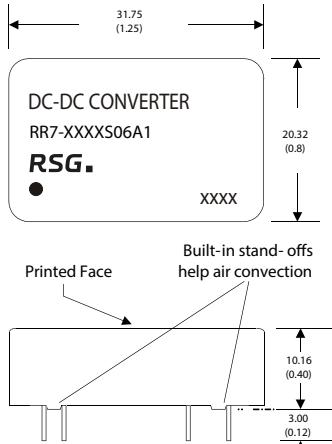


Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

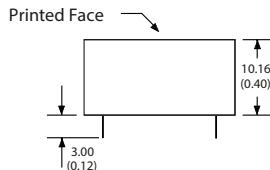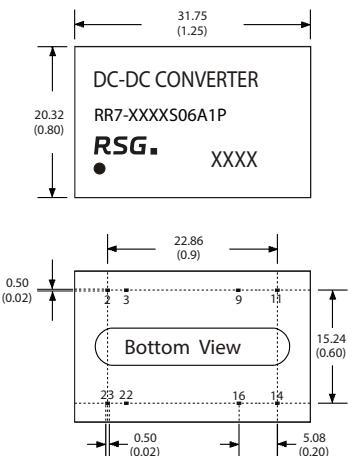

For "P" Case

24 Pin DIL Package
Non-Conductive Plastic

Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

The models listed here are just standard type. If you need a product with special specification or you have questions regarding packing standards (Tube oder Tape/Reel) as well as application support, please contact our specialists: sales@rsg-electronic.de or +49 69-984047-41/-28