


RR4-S06/D06

- **24 Pin DIL Package**
- **Wide 2:1 Input Range**
- **1500VDC Isolation**
- **Up to 3500VDC Isolation**
- **Continuous Short Circuit Protection**
- **Efficiency up to 83%**
- **Operating Temperature Range -40° ~ +85°C**
- **Metal Case Standard , Optional Plastic Case**

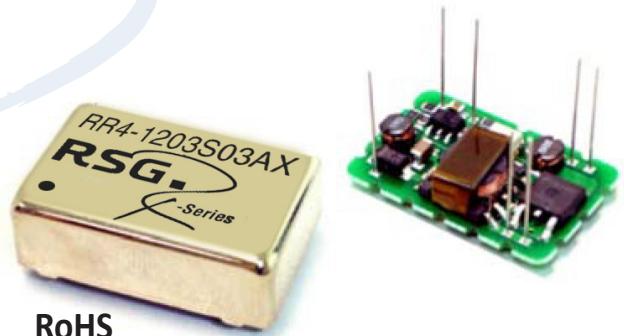

RoHS

OUTPUT SPECIFICATION		ENVIRONMENTAL SPECIFICATION	
Voltage accuracy:	±1%	Operating Temperature range:	-40°C ~+85°C (see Derating Curve)
Line regulation: Single & Dual	±0.5% max.	Maximum Case Temperature:	100°C
LOAD REGULATION:	±0.5%	Storage Temperature :	-40°C ~+125°C
	Output 3.3V Model: ±1.5%	Cooling :	Nature Convection
Short Circuit Protection :	Indefinite (Automatic Recovery)	PHYSICAL SPECIFICATIONS:	
Ripple noise (20Mhz bandwidth):	60mV pk-pk	Case Material:	Nickel-coated Copper
Temperature coefficient:	±0.02%<>°C	Base Material:	Non-conductive Black Plastic (UL94V-0 rated)
Capacitor load:	See table	PIN Material:	Ø 0.5mm Brass Solder coated
INPUT SPECIFICATIONS		Potting Material:	Epoxy (UL94V-0 rated)
Voltage Range:	See table	Weight Case-DIP:	13.5g (plastic), 17.0g (Metal)
Max. Input Current:	See table	Dimmension DIP:	1.25" x 0.8" x 0.4"
No-Load/Full-Load Input Current:	See table	ABSOLUTE MAXIMUM RATINGS (1)	
Input Filter:	PI Type	Input Surge Voltage (100ms)/	
Input Reflected Ripple Current :	35mA pk-pk	12V Models:	24VDC max.
GENERAL SPECIFICATIONS		24V Models:	40VDC max.
Efficiency:	See table typ.	48V Models:	80VDC max.
I/O Isolation Voltage Metal Case (3 sec.):	1000VDC	Soldering Temperature:	260°C max. ⁽²⁾
I/O Isolation Voltage (3 sec.):	1500 ~ 3500VDC	EMC SPECIFICATIONS	
I/O Isolation Capacitance:	500pF typ.	Radiated-/Conducted Emissions:	EN55022 Class A (see EMI Filter note)
I/O Isolation Resistance:	1000M Ohm	ESD:	IEC 61000-4-2 Perf.Criteria A
Switching Frequency:	266kHz, typ.	RS:	IEC 61000-4-3 Perf.Criteria A
Humidity:	95% rel H	EFT:	IEC 61000-4-4 Perf.Criteria A
Reliability Calculated MTBF :	> 1.21MHrs (MIL-HDBK-217 f)	SURGE:	IEC 61000-4-5 Perf.Criteria A
Safety Standard: (designed to meet):	IEC 60950-1	CS:	IEC 61000-4-6 Perf.Criteria A
		PFMF	IEC 61000-4-8 Perf.Criteria A

1) These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.

2) (1.5mm from case 10sec Max.)


3) All specifications typical at TA= 25°C, nominal input voltage and full load unless otherwise specified.

4) The information and specification contained in this data sheet are believed to be correct at time of publication. However RSG accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice.

NUMBER STRUCTURE

RR4 -	XX	XX	S/D	XX	A	X	X
Name/Package		Output		Power (W)	Code		
RR4=DIL24				02=2.00	internal		
Input			Type	03=3.00			
12= 9-18V	03=3.3V		S= Single-Outp.	04=4.00			
24=18-36V	05=5.0V		D= Dual-Outp.	05=5.00			
48=36-72 V	09=9.0V			06=6.00			
	12=12V						
	15=15V						
	24=24V						

P = Plastic Case
Standard = Metal

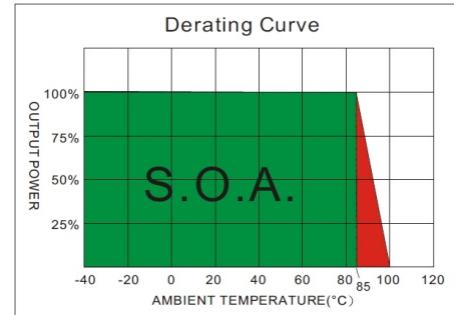

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
RR4-1203S06AX	9-18	30	527	3.3	0	1400	73	1000
RR4-1205S06AX	9-18	30	649	5	0	1200	77	1000
RR4-1209S06AX	9-18	30	641	9	0	666	78	680
RR4-1212S06AX	9-18	30	617	12	0	500	81	330
RR4-1215S06AX	9-18	30	625	15	0	400	80	220
RR4-1224S06AX	9-18	30	625	24	0	250	80	68
RR4-1203D06AX	9-18	30	527	±3.3	0	±909	73	±680
RR4-1205D06AX	9-18	30	649	±5	0	±600	77	±330
RR4-1209D06AX	9-18	30	625	±9	0	±333	80	±220
RR4-1212D06AX	9-18	30	625	±12	0	±250	80	±100
RR4-1215D06AX	9-18	30	632	±15	0	±200	79	±47
RR4-1224D06AX	9-18	30	625	±24	0	±125	80	±33
RR4-2403S06AX	18-36	20	256	3.3	0	1400	75	1000
RR4-2405S06AX	18-36	20	313	5	0	1200	80	1000
RR4-2409S06AX	18-36	20	304	9	0	666	82	680
RR4-2412S06AX	18-36	20	313	12	0	500	80	330
RR4-2415S06AX	18-36	20	304	15	0	400	82	220
RR4-2424S06AX	18-36	20	305	24	0	250	82	68
RR4-2403D06AX	18-36	20	333	±3.3	0	±909	75	±680
RR4-2405D06AX	18-36	20	321	±5	0	±600	78	±330
RR4-2409D06AX	18-36	20	301	±9	0	±333	83	±220
RR4-2412D06AX	18-36	20	312	±12	0	±250	80	±100
RR4-2415D06AX	18-36	20	312	±15	0	±200	80	±47
RR4-2424D06AX	18-36	20	312	±24	0	±125	80	±33
RR4-4803S06AX	36-72	12	128	3.3	0	1400	75	1000
RR4-4805S06AX	36-72	12	156	5	0	1200	80	1000
RR4-4809S06AX	36-72	12	152	9	0	666	82	680
RR4-4812S06AX	36-72	12	156	12	0	500	80	330
RR4-4815S06AX	36-72	12	151	15	0	400	83	220
RR4-4824S06AX	36-72	12	151	24	0	250	83	68
RR4-4803D06AX	36-72	12	171	±3.3	0	±909	73	±680
RR4-4805D06AX	36-72	12	158	±5	0	±600	79	±330
RR4-4809D06AX	36-72	12	158	±9	0	±333	79	±220
RR4-4812D06AX	36-72	12	156	±12	0	±250	80	±100
RR4-4815D06AX	36-72	12	156	±15	0	±200	80	±47
RR4-4824D06AX	36-72	12	156	±24	0	±125	80	±33

Suffix "3" means 3.5KVdc isolation


Suffix "P" means Plastic case instead of standard Metal Case

1. Ripple/Noise measured with a 1uF ceramic capacitor.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Input filter components are required to help meet conducted emission class A, which application refer to the EMI Filter of design & feature configuration.
6. An external filter capacitor is required if the module has to meet IEC 61000-4-4 and IEC 61000-4-5.
The filter capacitor RSG suggest: Nippon - chemi - con KY series, 220uF/100V.

TEST CONFIGURATION


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor Lin(12uH) and a source capacitor Cin(47uF, ESR<1.0Ω at 100KHz) at nominal input and full load.

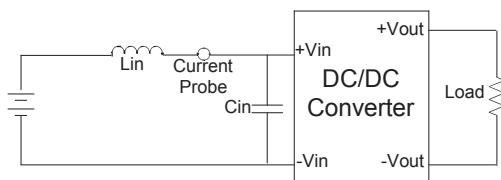


Output Ripple & Noise Measurement Test

Use a capacitor Cout(1.0uF) measurement.
The Scope measurement bandwidth is 0-20MHz.

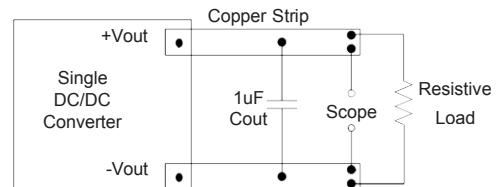


EMI Filter



Input filter components (C1, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

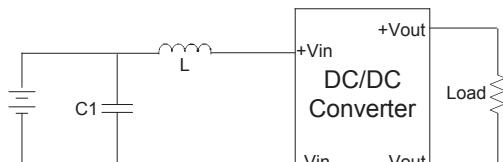

C1	L
100uF, 100V	12uH

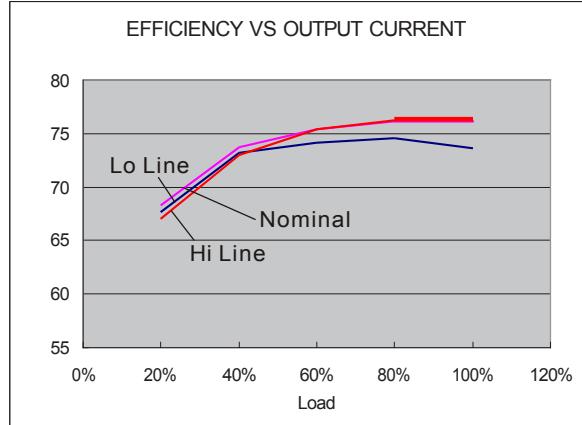



MECHANICAL SPECIFICATIONS

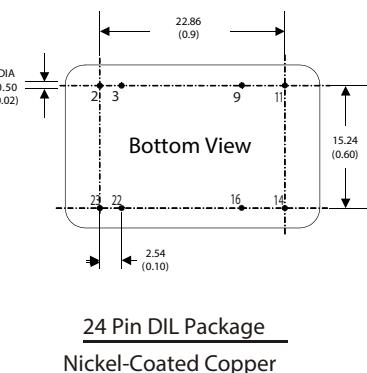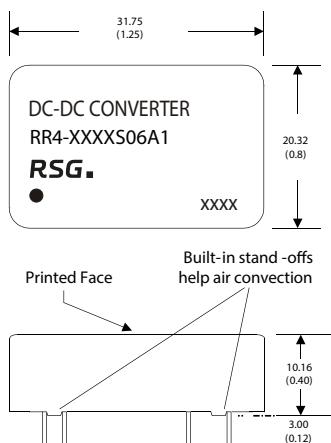

Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

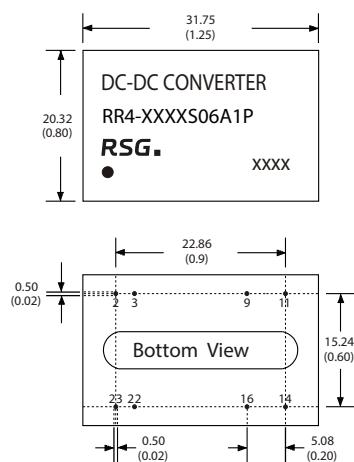

For "P" Case

24 Pin DIL Package
Non-Conductive Plastic

Notes: All dimensions are typical in millimeters (inches).
 1. Pin diameter: 0.5 ± 0.05 (0.02 ± 0.002)
 2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
 3. Case Tolerance: ± 0.5 (± 0.02)

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

The models listed here are just standard type. If you need a product with special specification or you have questions regarding packing standards (Tube oder Tape/Reel) as well as application support, please contact our specialists: sales@rsg-electronic.de or +49 69-984047-41/-28