


The RWM Casters Solid Urethane Wheels offer quiet operation and rollability and are designed for topline applications such as automotive plants. This non-marking wheel is resistant to grease, oil, chemicals and moisture. In addition, it is also resistant to chunking, cutting and abrasive wear. These Solid Urethane Wheels are used in application that need lower noise levels, improved floor protection and where heavy loads and continuous use cause standard polyurethane wheels to heat up and degrade. These Solid Urethane Wheels are proudly Made in the USA.

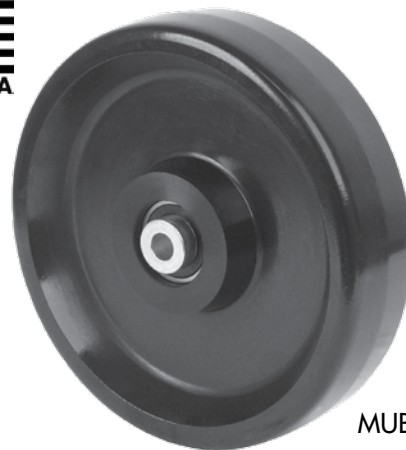

MUB-0820-08

MU - High Performance Solid Urethane Wheel - color black

Features

Wheel Bearing: Choice of straight roller, celcon and ball bearings

Temperature Range: -40°to +180°F

Hub Length: Can be shortened or lengthened to order

Hardness: MU wheel is 70 durometer Shore D

Applications

- ◆ automotive plants and topline applications
- ◆ applications needing lower noise levels
- ◆ applications needing improved floor protection
- ◆ applications where heavy loads and continuous use cause standard poly wheels to heat up and degrade



Options

- TG** Thread Guard on 2" wheels
- WS** Wheel Seals

The solid urethane wheels can be used for the following series of rigs to make durable, long-lasting casters: 46, 47, 48, 52, 65, 70, 75 and 76 Series.

There's no need to add an option for microbial resistance; through the use of superior polyurethane, RWM wheels are equipped to resist buildup from the factory.

SPECIFICATIONS

Wheel Diameter	Wheel Width	lbs.Capacity	Axle Diameter	Precision Ball Bearing	Sealed	Hub Length	Approx Weight
4"	2"	700	1/2"	MUB-0420-08		2-3/16"	1.6
5"	2"	1000	1/2"	MUB-0520-08		2-3/16"	1.7
6"	2"	1200	1/2"	MUB-0620-08		2-3/16"	1.8
8"	2"	1500	1/2"	MUB-0820-08		2-7/16"	2.9

UP TO 3,000 POUND CAPACITY