



1225 Isley Road, Gastonia, NC 28052
Phone: [800-634-7704](tel:800-634-7704) Fax: 800-253-6634
www.rwmcasters.com

CargoMax Casters

Air Cargo Casters




RWM Caster's CargoMax™ is the strongest, most durable air cargo caster on the market. The CargoMax™ Air Cargo caster features an optional demountable foot guard built specifically for use on sorting decks. The foot guard prevents foot entry into the caster mounting hole on decks and assists in providing a safer, more productive working environment on sortation decks.



CargoMax

CargoMax

Top Plates

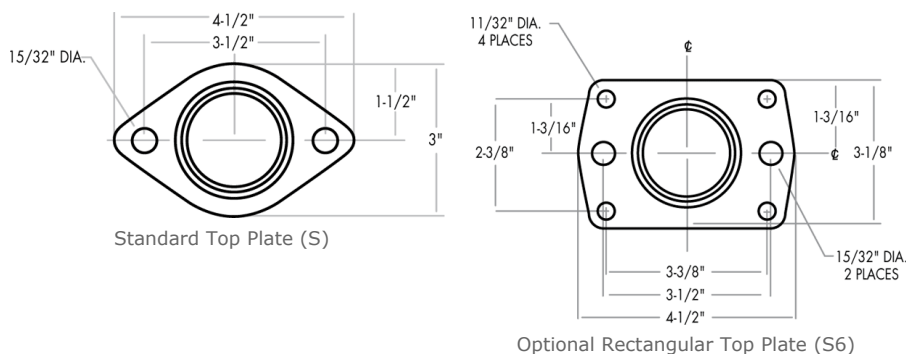

Standard Top Plate (S)

Optional Rectangular Top Plate (S6)

Features

Precision Ball Bearing: All wheels and swivel raceways have precision ball bearings for better load distribution, strength in side thrust application, and ease of mobility.

Dust Shield, Water Guard & Thread Guard: Prevents wheel and swivel assembly from becoming contaminated

Capacity: 500 lbs.

Finish: Zinc plated to protect against corrosion








Benefits

CargoMax™ Air Cargo Casters can take the heaviest blows from all types of cargo containers with the highest rated impact resistance in the air cargo industry, even under the most extreme conditions. It outshines the competition in endurance with exclusive features such as three sealed precision bearings, high strength thread and dust guards, high-strength polymer wheels and a rivet-protecting water shield.

Options

FG Foot Guard

Specifications

 Wheel Diameter	 Wheel Width	 Wheel Type	 lbs. Capacity	 Overall Height	Sealed Precision Ball Bearing	 Swivel Lead	 Approx Weight
2-5/16"	1-5/16"	Hytrel	500	3-25/32"	26- USB -2313-S-TG	1"	1.62
2-5/16"	1-5/16"	Hytrel	500	3-25/32"	26- USB -2313-S6-TG	1"	1.62
2-5/16"	1-5/16"	Hytrel	500	3-25/32"	26- USB -2313-S-TG-FG	1"	2.46
2-5/16"	1-5/16"	Hytrel	500	3-25/32"	26- USB -2313-S6-TG-FG	1"	2.46
2-3/4"	1-5/16"	Hytrel	500	4"	26- USB -2713-S-TG	1"	1.71
2-3/4"	1-5/16"	Hytrel	500	4"	26- USB -2713-S6-TG	1"	1.71
2-3/4"	1-5/16"	Hytrel	500	4"	26- USB -2713-S-TG-FG	1"	2.54
2-3/4"	1-5/16"	Hytrel	500	4"	26- USB -2713-S6-TG-FG	1"	2.54