


Turntable Swivel Sections

RWM incorporates our Kingpinless™ swivel design into turntable swivel sections. This heavy duty turntable is patterned after the popular Kingpinless™ series and is built to take continuous punishment from the toughest industrial applications. They are ideal for work stations, weld tables and material container stands.

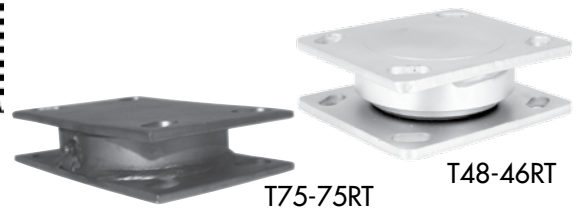

SPECIFICATIONS

Swivel Section	Mounting Plates	Overall Stack Height	Capacity lbs.	Max. Offset	Approx. Weight	Top Plate size	Bolt Hole Spacing	Optional Center Hole
47	T47-46RT(47STD)	1-1/16"	900	1-3/16"	2.6	4" x 4-1/2"	2-5/8" x 3-5/8" slotted to 3" x 3"	1"
	T47-41RT	1-1/16"			3.8	4" x 5"	2-5/8" x 3-5/8" slotted to 3" x 4"	
	T47-42RT	1-1/16"			4.8	4-1/2" x 6-1/2"	2-7/16" x 4-15/16" slotted to 3-3/8" x 5-1/4"	
	T47-43RT	1-1/16"			4.9	5" x 5-1/2"	4-1/8" x 4-1/2"	
48	T48-46RT(STD)	1-9/16"	1200	1-3/16"	3.4	4" x 4-1/2"	3/8" Dia. (2-5/8" x 3-5/8" slotted to 3" x 3")	13/16"
	T48-42RT	1-9/16"			5.1	4-1/2" x 6-1/2"	1/2" Dia. (2-7/16" x 4-15/16" slotted to 3-3/8" x 5-1/4")	
65	T65-41RT	1-9/16"	1500	1-3/16"	4.3	4" x 5"	2-5/8" x 3-5/8" slotted to 3" x 4"	1"
	T65-42RT	1-9/16"			5.3	4-1/2" x 6-1/2"	2-7/16" x 4-15/16" slotted to 3-3/8" x 5-1/4"	
	T65-43RT	1-9/16"			5.4	5" x 5-1/2"	4-1/8" x 4-1/2"	
	T65-46RT (65STD)	1-9/16"			3.13	4" x 4 1/2"	2 5/8" x 3 5/8" slotted to 3" x 3"	
	T65-54RT	1-13/16"			8.13	5-1/4" x 7-1/4"	3-3/8" x 5-1/4" slotted to 4-1/8" x 6-1/8"	
	T65-75RT	1-11/16"			6.5	4-1/2" x 6-1/2"	2-7/16" x 4-15/16" slotted to 3-3/8" x 5-1/4"	
75	T75-75RT	1-11/16"	4500	1-1/2"	7.1	4-1/2" x 6-1/2"	2-7/16" x 4-15/16" slotted to 3-3/8" x 5-1/4"	1-1/2"
	T75-76RT	1-13/16"	5200		10.7	5-1/4" x 7-1/4"	3 3/8" x 5 1/4" slotted to 4 1/8" x 6 1/8"	
	T75-90RT	2-1/16"	5200		14.1	6" x 7"	4-5/8" x 5-1/2" slotted to 4-3/8" x 5-5/8"	
	T75-95RT	2-1/16"	5200		15.4	6" x 7-1/2"	4-1/2" x 6" slotted 4-1/8" x 6-1/8"	
85	T85-90RT (85STD)	2-3/8"	7500	2-1/8"	17.5	6" x 7"	4-5/8" x 5-1/2" slotted to 4-3/8" x 5-5/8"	2"
	T85-95RT	2-3/8"			18.7	6" x 7-1/2"	4-1/2" x 6" slotted 4-1/8" x 6-1/8"	
	T85-LLRT	2-3/8"			41.1	8-1/2" x 11"	7" x 9-3/4"	
	T85-LMRT	2-3/8"			25.1	8-1/2" x 8-1/2"	7" x 7"	
*95	T95-95RT	2-1/2"	10,000	2-1/4"	22.1	6-1/4" x 7-1/2"	4-1/2" x 6" slotted 4-1/8" x 6-1/8"	1"
125	T125-LLRT	2-7/8"	30,000	3-1/2"	52.1	8-1/2" x 11"	7" x 9-3/4"	4"
	T125-LMRT (125STD)	2-7/8"			36.1	8-1/2" x 8-1/2"	7" x 7"	

* When adding a Swivel Lock option, the Overall Stack Height will be 3".

All dimensions are in inches except for capacity, which is in pounds.

Consult the factory for special mounting options and applications, and stainless steel options. Larger, higher capacity raceways are available. Contact factory for more information.

Features

Raceway Design: Patented Kingpinless™ single ball bearing precision machined raceway hardened to 53 Rockwell C minimum. All swivel sections are supplied with a lubrication fitting for field maintenance. See individual series section for more information.

Mounting: Choose an available mounting plate or specify a desired method. Some options include: stems, center holes, and tapped holes.

Finish: Laguna Blue paint. 47, 48 and 65 Series come standard zinc plated

Options

- DSL** Demountable Swivel Lock*
- HT** High Temperature Lubrication
- HTP** High Temperature Paint
- LT** Low Temperature Lubrication
- NY** Notched Yoke
- OM** Optional Mounting
- SL** Swivel Lock
- SR** Sealed Raceway
- SS** Stainless Steel (65, 75 only)
- ZP** Zinc Plated

*When ordering the Demountable Swivel Lock (DSL), you must also order the Notched Yoke (NY).

UP TO 30,000 POUND CAPACITY