

# Direct Connect Cable System




## High Speed Press Fit Cable Assembly

Samtec's direct connect cable system is a cost effective solution for high speed board-to-board or flyover applications. The high retention press fit termination provides direct attach to the PCB eliminating the additional cost of board level connectors. This system supports and surpasses \*PCIe® Gen 3 speed at 2 meters.

The 2,00 mm (.0787") pitch assembly (DCC Series) offers multiple End 2 options for increased design flexibility and is rated for performance up to 15 GHz at 7dB insertion loss (9 inches). Eye Speed® 32 AWG twinax cable with 100Ω differential pair signal routing is available in four or eight pairs; stitched grounds in development. In addition, this assembly features an ultra low 3 mm profile and four standard cable lengths to accommodate new and existing board designs.


### Features:

- No board mating connectors required
- High retention press fit termination directly to the PCB
- Multiple End 2 options: ECDP and other Samtec interconnects
- 32 AWG Eye Speed® twinax cable
- 2,00 mm (.0787") pitch
- 100Ω differential pair signal routing
- Performance up to 15 GHz
- Coplanar, right angle and parallel board-to-board applications
- Flyover applications simplify PCB design and limit signal degradation
- Extraction Tool

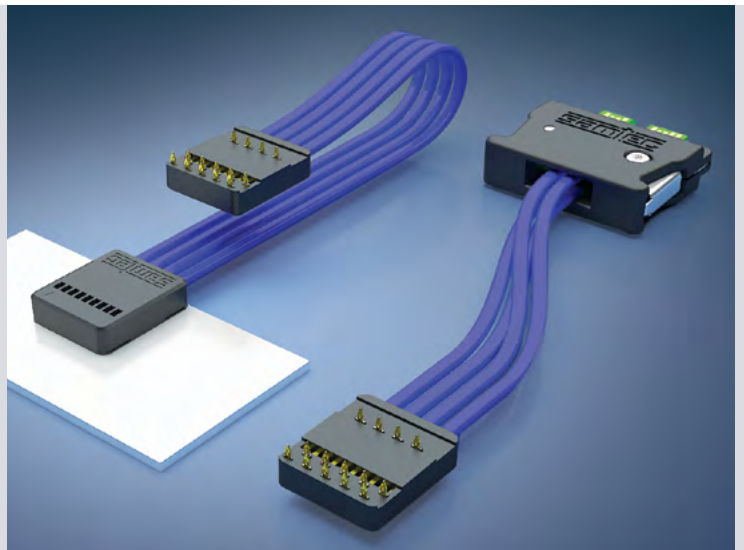


### Assembly

Cable: DCC

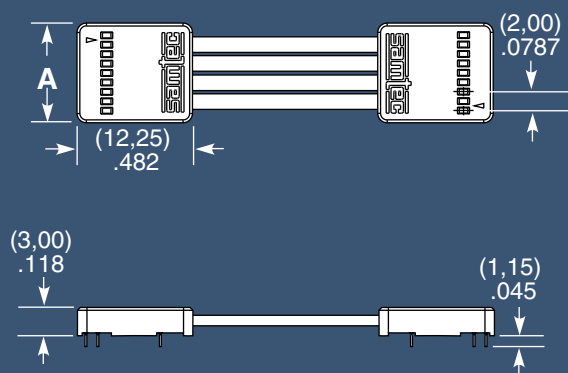

NO. OF PAIRS	A
-04	(10,60) .417
-08	(18,60) .732

### Sample Pin Mapping

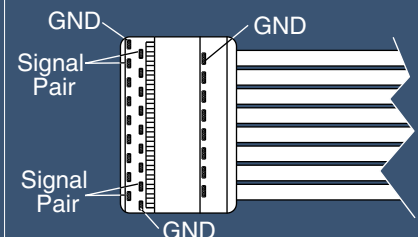

\*PCIe® is a registered trademark of PCI-SIG®.

For more High Speed Cable Solutions, please visit [samtec.com/cable](http://samtec.com/cable)

UNITED STATES • NORTHERN CALIFORNIA • SOUTHERN CALIFORNIA • SOUTH AMERICA • UNITED KINGDOM • GERMANY • FRANCE • ITALY • NORDIC/BALTIC  
BENELUX • ISRAEL • INDIA • AUSTRALIA / NEW ZEALAND • SINGAPORE • JAPAN • SHANGHAI • SHENZHEN • TAIWAN • HONG KONG • KOREA

JANUARY 2015