


# 50 Ω, 36 AWG MICRO COAX CABLE HT

TCF-3650F-XX-XX

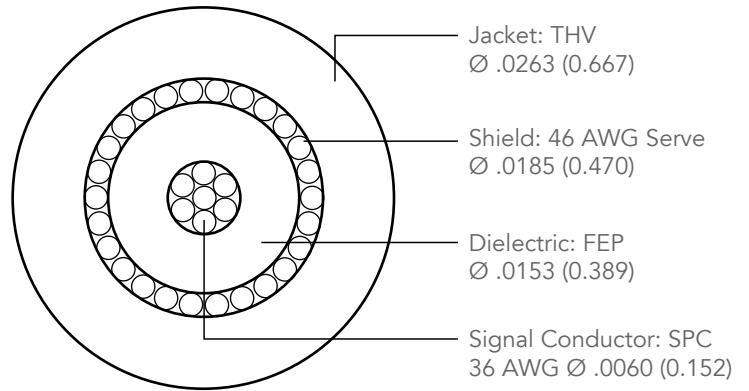



## PERFORMANCE DATA

Capacitance:	29 pF/ft (nominal)
Propagation Delay:	1.33 ns/foot
Flex Cycles:	40,000 cycles, 20-wide ribbon*
Current Rating:	Single coax = 1.5 Amps** 5-wide ribbon = 0.8 Amps**
Shield DCR:	137 Ω/1000 ft
CC DCR:	451 Ω/1000 ft
Min. Bend Radius:	.125"
Availability:	Single, 2-35 ribbon, tape bonded
Temperature Rating:	-40 °C to 125 °C, UL VW-1 Tested ***
DWV Working Voltage:	219 V****

Insertion Loss	0.25 m	1 m
-3 dB	8.5 GHz	1.1 GHz
-7 dB	>20 GHz	5.2 GHz

\* Test Conditions – 4 oz. weight, dia 1/4" mandrel, +/-90 bend X2  
 \*\* Rating – 30 °C Temperature Rise, 20% de-rated. Testing performed on 10-position ribbon.  
 \*\*\* Test Conditions – Heat Shock/Cold Bend per UL #1581-540 and #1581-580, wire wrap 1/4" mandrel, visual inspection  
 \*\*\*\* Test Conditions – IR/DWV/Thermal Shock/Humidity per EIA-364-20, 21, 31 and 32

## INSERTION LOSS AND RETURN LOSS GRAPHS \*\*\*\*\*

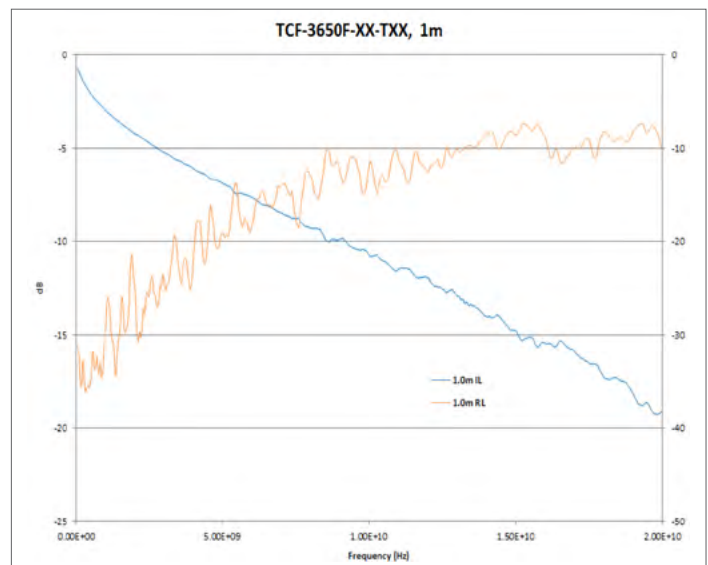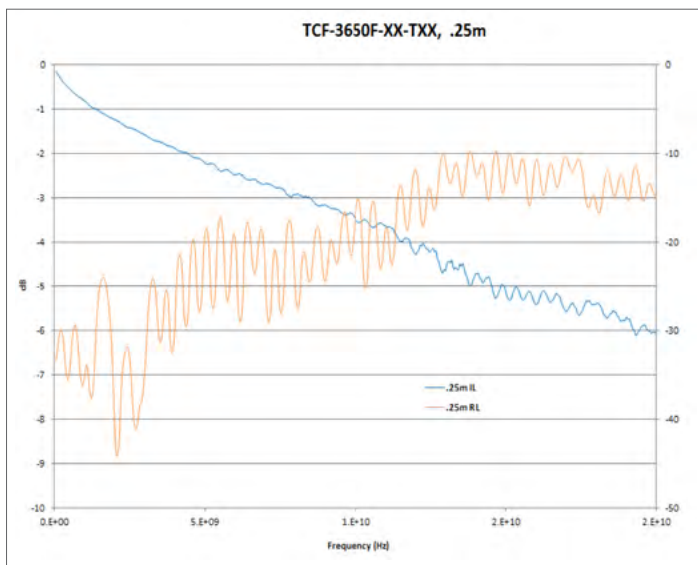

\*\*\*\*\* IL and RL data are typical. Results may vary.



1.800.SAMTEC.9 • HDR@samtec.com

September 20, 2016 • Rev: G