

Line filters
Spectral range
334 nm to 399 nm

Type	DAD 8 (3 cavities)
λ_m -tolerance [% of λ_m]	± 0.5
Available with λ_m in range [nm]	334–399
Spectral values	
Half width HW [nm]	6–10
Maximum spectral transmittance τ_{\max} within passband	≥ 0.3
$Q = \frac{\text{tenth width}}{\text{half width}}$	approx. 1.5
$q = \frac{\text{thousandth width}}{\text{half width}}$	approx. 3.5
Blocking range [nm]	unlimited (λ_m from 334 nm to 360nm) up to 1200 ¹⁾ (λ_m from 361 nm to 399 nm)
Average value τ_{SM} of spectral transmittance within blocking range	$\leq 10^{-5}$
Other properties	
Humidity resistance of filters with preferred dimensions	MIL-Std-810 C, method 507, proc. 1 : 5 cycles
Operating temperature	up to 70 °C for several hours up to 100 °C for short periods
Temperature dependence of λ_m $\Delta\lambda_m/\Delta T$ [nm/°C]	approx. +0.01
Notes	¹⁾ Unlimited blocking range by additional blocking filters on request. Filter specification can, however, be changed because of this.

Table 4: Specifications of filter type DAD 8

Preferred dimensions [mm]	
External dimensions	Dimensions of utilizable area
$\varnothing 12 +0/-0.3$	$\varnothing \geq 9$
$\varnothing 25 +0/-0.3$	$\varnothing \geq 22$
$\varnothing 50 +0/-0.3$	$\varnothing \geq 47$
Thickness	≤ 7
Other dimensions on request	

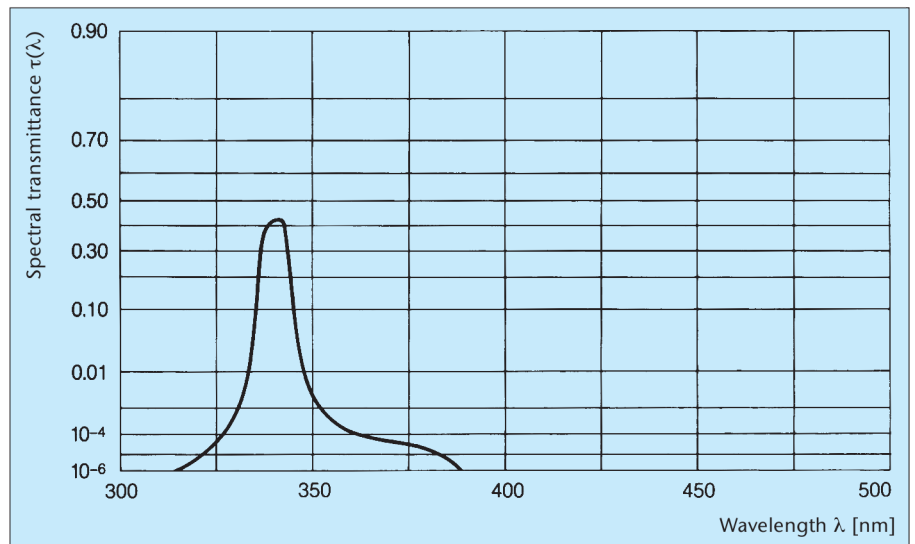


Fig. 12: Spectral transmittance curve (general curve) of filter type DAD 8