




Dimensions: (inches/mm)

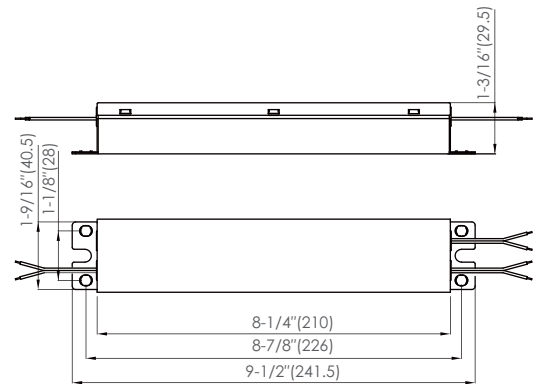

■ Features

- Universal input voltage(AC120-277V)
- Metal housing
- 10-100% dimming range by 1-10V dimmer
- UL 8750 class 2 output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- No load power consumption \leq 0.5W
- THD<20% (load between 7~96W)@120VAC
- Efficiency 88% (AC120V, full load)

■ Standards

UL8750
UL1310
FCC15B

■ Characteristics

Rated input voltage: AC120-277V 50/60Hz(power factor measured at AC120V and full load)

Catalog No.	Model No.	Constant output voltage	Load	λ	t_a	t_c	L x W x H	Approval
9-9624DL-26	SLD96-24VC-UN1	DC24V	0-96W	0.95	-4-122°F (-20-50°C)	194°F (90°C)	9-1/2"x1-9/16"x1-3/16" (241.5x40.5x29.5mm)	