


LED Linear Lighting



TUBE



Dimensions: (inches/mm)

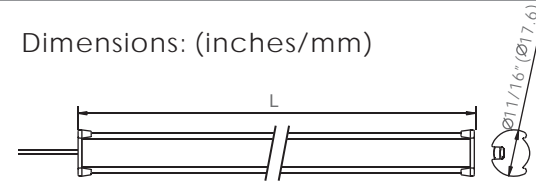

Characteristics:

- Linkable up to 119°
- Dark spot free at the linking point
- Uniform light
- Lifetime : 50,000 hrs(ta=77°F, 25 C)
- ta : -4°F ~ 95°F (-20 C ~ 35 C)
- CCT: 3000K 4000K 5000K
- Material : aluminum alloy

Application:

Suitable for use in covers, display cases, etc.

Model	IN	W	Beam	L	Max NO	Max NO
TUBE-L18-24V	24VDC	6.5W	110°	11-13/16" (300mm)	18 pcs	10 pcs
TUBE-L36-24V	24VDC	13W	110°	23-5/8" (600mm)	36 pcs	5 pcs
TUBE-L54-24V	24VDC	20W	110°	35-5/16" (900mm)	54 pcs	3 pcs

Housing colour:

LED Linear Lighting



Vertical & Horizontal Beamwidth

Center Beam FC

H	110°	D	TUBE-L18-24V					TUBE-L36-24V					TUBE-L54-24V				
			2700K	3000K	4000K	5000K	6500K	2700K	3000K	4000K	5000K	6500K	2700K	3000K	4000K	5000K	6500K
12"	34-1/4"		126	126	133	133	133	180	180	189	189	189	200	200	211	211	211
18"	51-7/16"		60	60	63	63	63	99	99	104	104	104	120	120	126	126	126
24"	68-9/16"		35	35	37	37	37	62	62	65	65	65	81	81	85	85	85
30"	85-11/16"		23	23	24	24	24	42	42	44	44	44	56	56	59	59	59
			380 lm	380 lm	400 lm	400 lm	400 lm	761 lm	761 lm	801 lm	801 lm	801 lm	1141 lm	1141 lm	1201 lm	1201 lm	1201 lm

Installation:

Clip 1

2x

Clip 2

2x

4x


Clip 3

2x

Clip 4


2x

LED Linear Lighting

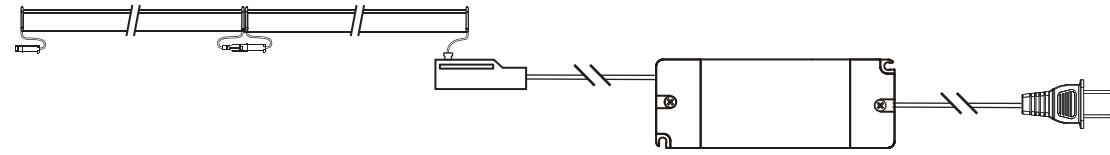

Wiring diagram:

Model	UL LISTED LED Power Supply	Max. Linkable
TUBE-L18-24V	<p>SLT50-24VL-2A Input:100-120VAC Output: 24V Max.:50W</p>	7 pcs
TUBE-L36-24V		3 pcs
TUBE-L54-24V		2 pcs



Wiring diagram:

Model	Splitter	LED Power Supply	Max. Linkable
TUBE-L18-24V	<p>JB-3 L=5-15/16\" (150mm)</p>	<p>SLT50-24VL-2 Input:100-240VAC Output: 24V Max.:50W</p>	7 pcs
TUBE-L36-24V			3 pcs
TUBE-L54-24V			2 pcs

LED Linear Lighting

