




FLUX



IP64

Dimensions: (inches/mm)

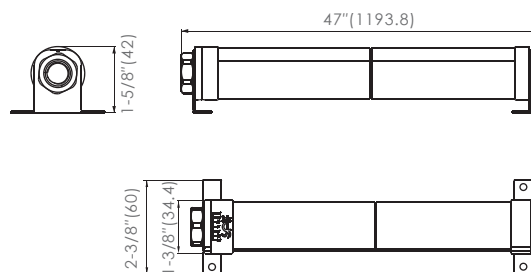

PATENT




Highlights:

- Anti-glare design
- Bright and consistent illuminance for display area
- Less heat radiation, more energy saving
- $R_a > 90$, $R_9 > 50$ (@3000K, 4000K)
- Lifetime: 50,000hrs ($t_a = 95^\circ\text{F}$, 35°C)
- IP Rating: IP64 (for damp locations)
- T_a : $-13^\circ\text{F} \sim 95^\circ\text{F}$ ($-25^\circ\text{C} \sim 35^\circ\text{C}$)
- Material: Aluminum alloy

Application:




- Ideal for under canopy applications in open air multi-deck case.

Installation:

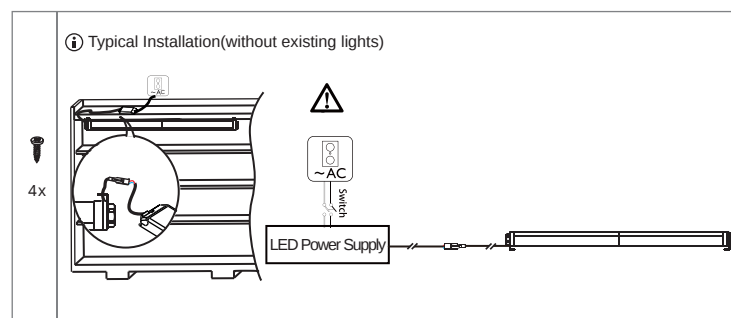


Center Beam FC

Specialized Candlepower Distribution

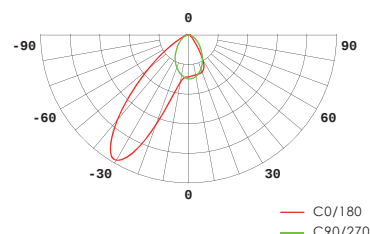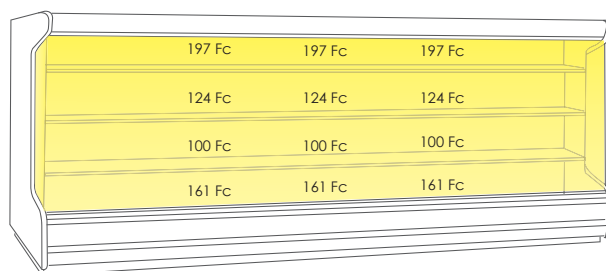

Wiring diagram:

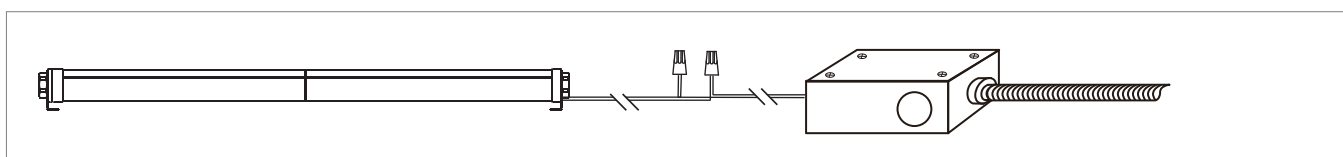

How to order (using our catalog numbers):

(Example: FLUX-4730KSS18)

Series	length	Color Temp	Finish	Installation	Cable Length
FLUX	—				
FLUX	47 - 47"(1193.8mm)	30K - 3000K 40K - 4000K	S - Silver	S - Screw Mounting	18 - 18"(450mm)

Catalog No.	Model	Description					Max. Pcs Per LED Power Supply
		Rated Input	Ra	Wattage (TYP)	Luminous Flux (TYP@4000K)	Include	96W (9-9624DL-26)
FLUX-4730KSS18	FLUX-L96-24V	24VDC	92	24W	2160 lm	1pc LED fixture 3pcs Screws 2pcs Wire Nuts	3 pcs
FLUX-4740KSS18							

How to choose your driver & cables:

Catalog No.	Description	Photo
9-9624DL-26	Model: SLD96-24VC-UN1 Matching driver, max. 96W. Input: 120-277VAC 9" hard wire Output: 24VDC 26" hard wire	

*Note: For alternative driver configurations, please contact our sales department.