


Dimensions: (inches/mm)

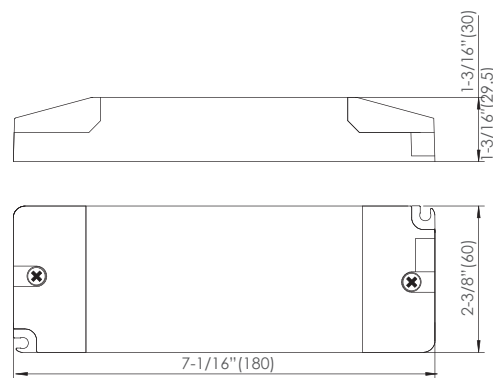

■ Features

- UL Listed power supply for constant voltage LED lamp
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- UL8750 Class 2 output
- No load power consumption ≤ 0.3W
- Efficiency ≥ 87% (AC120V, full load)

■ Standards


UL8750
UL1310
FCC 15A

■ Characteristics

Rated input voltage: AC100-120V 50/60Hz (power factor measured at AC120V and full load)

Model No.	Constant output voltage	Load	λ	t_a	L x W x H	Approval
SLT75-24VL-2A	DC24V	0-75W	0.95	-4-77°F (-20-25°C)	7-1/16"x2-3/8"x1-3/16" (180x60x30mm)	

■ Listed driver configuration

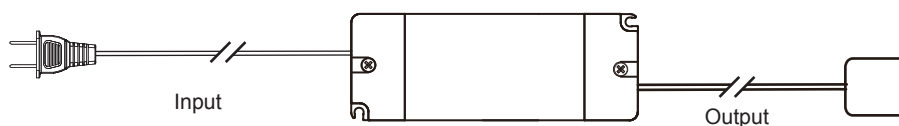

Input Plug	Input Cable Length	Model No.	Splitter	Output Cable Length
NA1 - NA1 NA2 - NA2	59 - 59"	7524LA - SLT75-24VL-2A	4A - JB-4A 12A - JB-12A 6V - JB-6-3 08S - P008-2P socket	6 - 6"

*Note: Details of plug and splitters see page 64