



LED Recessed Lighting



CRIS



Dimensions: (inches/mm)

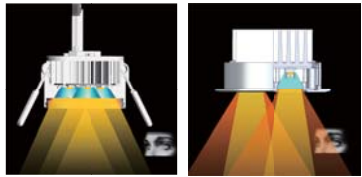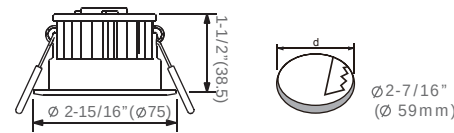

Characteristics:

- Low power consumption
- Anti-glare design
- Lifetime : 50,000 hrs(ta=77°F, 25 °C)
- ta: -4°F ~ 95°F (-20 °C ~ 35 °C)
- CCT: 3000K 4000K 5000K
- Material: aluminum alloy

Housing colour: ☐ ☒

Application:


Suitable for use in display shelves, under or in cabinets, display cases, etc.

Model	IN	W		
CRIS-R4-350	350mA	4W	25°	4 pcs


LED Recessed Lighting

Vertical & Horizontal Beamwidth			Center Beam FC				
25° 			2700K	3000K	4000K	5000K	6500K
2'	7/8'	238	252	275	283	252	
4'	1-3/4'	59	63	69	71	63	
6'	2-11/16'	26	28	31	31	28	
8'	3-9/16'	15	16	17	18	16	
10'	4-7/16'	9	10	11	11	10	
12'	5-5/16'	7	7	8	8	7	
14'	6-3/16'	5	5	5	6	5	
16'	7-1/8'	4	4	4	4	4	
H	D	265 lm	281 lm	306 lm	316lm	281 lm	

Installation:

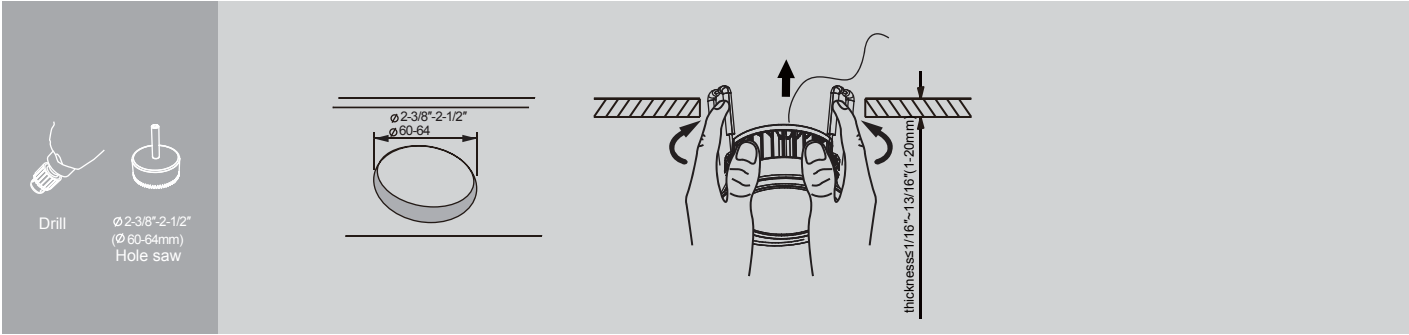


Wiring diagram:

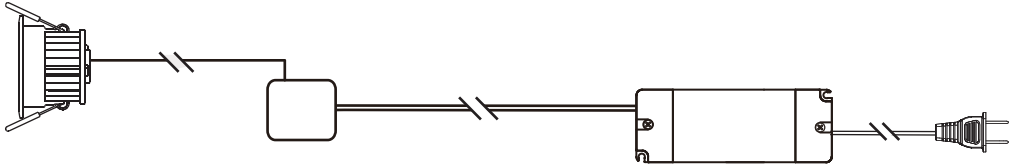

Model	Splitter	LED Power Supply	Cable + Plug	Max. Runs
CRIS-R4-350	JBI-4A L=5-15/16" (150mm)	SLT20-350IF-1 Input:100-240VAC Output: 350mA Max.:20W	L=59" (1500mm)	4 pcs

Wiring diagram:

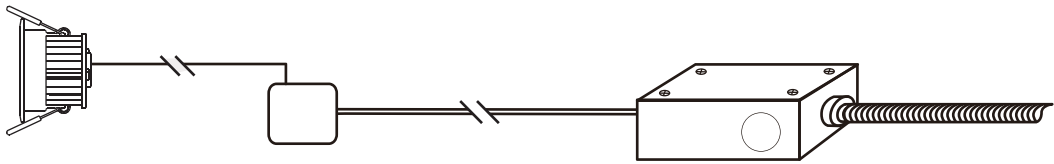

Model	Splitter	LED Power Supply	Max. Runs
CRIS-R4-350	JBI-4A L=5-15/16" (150mm)	SLT20-350IF-1 Input:100-240VAC Output: 350mA Max.:20W	4 pcs