



RECESSED



RECESSED-R3-700

RECESSED-R6-700





Characteristics:

- Available in adjustable or fixed head
- Low power consumption
- Anti-glare design
- Lifetime : 50, 000 hrs(ta=77°F, 25 C)
- ta: -4°F ~ 95°F (-20 C ~ 35 C)
- CCT: 3000K 4000K 5000K
- Material: aluminum alloy

Housing colour:   

Dimensions: (inches/mm)

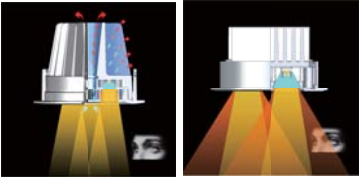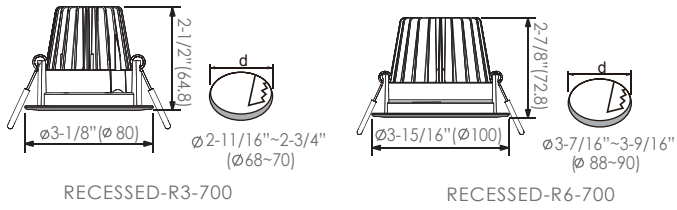

- Glare is avoided
- Excellent heat dissipation
- Glare is present

Application:

Suitable for use in display shelves, under or in cabinets, wall cabinets, ceilings etc.

Model	IN	W		
RECESSED-R3-700	700mA	7.4W	40°	3 pcs
RECESSED-R6-700	700mA	14.7W	40°	6 pcs

Vertical & Horizontal Beamwidth			Center Beam FC				
RECESSED-R3-700			2700K	3000K	4000K	5000K	6500K
24"	40°	17-1/2"	208	220	240	247	220
48"		34-15/16"	52	55	60	62	55
72"		52-7/16"	23	24	26	27	24
96"		69-7/8"	13	14	15	16	14
120"		87-3/8"	8	9	10	10	9
144"		104-13/16"	6	6	7	7	6
168"		122-5/16"	4	4	4	4	4
192"		139-3/4"	3	3	3	3	3
H	D		384 lm	407 lm	444 lm	457 lm	407 lm
RECESSED-R6-700			2700K	3000K	4000K	5000K	6500K
24"	40°	17-1/2"	425	450	490	506	450
48"		34-15/16"	106	112	122	126	112
72"		52-7/16"	47	50	54	56	50
96"		69-7/8"	26	28	31	31	28
120"		87-3/8"	17	18	20	20	18
144"		104-13/16"	11	12	13	13	12
168"		122-5/16"	8	9	10	10	9
192"		139-3/4"	7	7	8	8	7
H	D		786 lm	833 lm	908 lm	936 lm	833 lm

Installation:

