


LED Linear Lighting



FLUTE



Dimensions: (inches/mm)

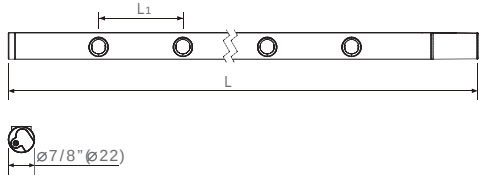

Model	Distance between the LED chip(L ₁)
FLUTE-L3-700-ES	3-3/8\"(85mm)
FLUTE-L6-700-ES	2-3/4\"(70mm)
FLUTE-L12-700-ES	2-3/8\"(60mm)
FLUTE-L16-700-ES	2-1/2\"(64mm)

PATENT

Characteristics:

- Anti-glare design
- Easy, quick connect/disconnect from lamp to power
- Lifetime: 50, 000 hrs(ta=77°F, 25 C)
- ta: -4°F~95°F(-20 C~35 C)
- CCT: 3000K 4000K 5000K
- Material: aluminum alloy

Housing colour:  

Application:

Ideal for jewelry, display cases, and cabinets.


Model					
FLUTE-L3-700-ES	700mA	6.3W	55°	11-1/2" (291.5mm)	3 pcs
FLUTE-L6-700-ES	700mA	12.6W	55°	22" (559.5mm)	6 pcs
FLUTE-L12-700-ES	700mA	25.2W	55°	34-1/2" (875.5mm)	12 pcs
FLUTE-L16-700-ES	500mA	24W	55°	46" (1167.5mm)	16 pcs

LED Linear Lighting

Vertical & Horizontal Beamwidth						Center Beam FC											
						FLUTE-L3-700-ES					FLUTE-L6-700-ES						
						2700K	3000K	4000K	5000K	6500K	2700K	3000K	4000K	5000K	6500K		
						12"	12-1/2"	341	365	389	414	487	553	593	632	672	790
						18"	18-3/4"	166	177	189	201	237	309	331	353	375	441
						24"	25"	95	102	109	116	136	192	206	220	234	275
						30"	31-1/4"	62	66	71	75	89	129	138	147	156	184
H	D	414 lm	444 lm	474 lm	503 lm	592 lm	889 lm	953 lm	1017 lm	1080 lm	1271 lm						
						FLUTE-L12-700-ES					FLUTE-L16-700-ES (Input:500mA)						
						2700K	3000K	4000K	5000K	6500K	2700K	3000K	4000K	5000K	6500K		
						12"	12-1/2"	623	667	712	756	889	460	493	526	559	658
						18"	18-3/4"	403	432	461	490	576	297	318	339	360	424
						24"	25"	282	302	322	342	403	218	233	249	264	311
						30"	31-1/4"	203	217	232	246	290	166	177	189	201	237
H	D	1637 lm	1754 lm	1871 lm	1988 lm	2399 lm	1645 lm	1763 lm	1881 lm	1998 lm	2351 lm						


LED Linear Lighting

Wiring diagram:




Model	Connecting Cable	LED Power Supply	Cable + Plug	Max. Linkable
FLUTE-L3-700-ES	 L=33-7/8" (860mm)	 SLT12-700IF-2(DC)-K Input: 100-240VAC Output:700mA Max.: 12W	 L=59"(1500mm)	1 pc
FLUTE-L6-700-ES		 SLT20-700IF-1(DC) Input: 100-240VAC Output:700mA Max.: 20W		1 pc
FLUTE-L12-700-ES		 SLT30-700IF-1(DC) Input: 100-240VAC Output:700mA Max.: 30W		1 pc
FLUTE-L16-700-ES		 SLT30-500IF-1(DC) Input: 100-240VAC Output:500mA Max.: 28W		1 pc

Wiring diagram:



Model	Connecting Cable	LED Power Supply	Max. Linkable
FLUTE-L3-700-ES	 L=33-7/8" (860mm)	 SLT12-700IF-2(DC)-K Input: 100-240VAC Output:700mA Max.: 12W	1 pc
FLUTE-L6-700-ES		 SLT20-700IF-1(DC) Input: 100-240VAC Output:700mA Max.: 20W	1 pc



Model	Connecting Cable	Splitter	LED Power Supply	Max. Runs
FLUTE-L12-700-ES	 L=33-7/8" (860mm)	 JBI-4DC-1	 SLT30-700IF-1 Input: 100-240VAC Output:700mA Max.: 30W	1 pc
FLUTE-L16-700-ES			 SLT30-500IF-1 Input: 100-240VAC Output:500mA Max.: 28W	1 pc

LED Linear Lighting

