




SHOKAI FAR EAST LTD.

9 Elena Court – Cortlandt Manor NY 10567 USA 914-736-3500 Fax: 914-736-3656
e-mail: sales@shokaifareast.com http://www.shokaifareast.com

SPEAKER SPECIFICATION

P/N 26CS32M-50ND	Specification	Test Condition
Size	26 mm (per drawing)	
Weight	4.8 gm.	
Rated Power	0.2 Watt	
Maximum Power	0.4 Watt	
Operation	Must Be Normal After Test	Sweep Test @ 3.46V, Sound Source 1.5W
Voice Coil Impedance	32 ohms \pm 15%	At 600Hz. 1V 20°C
Resonant Frequency	860Hz \pm 172Hz	Without Baffle
Frequency Response	450-6500Hz (within 10dB)	Without Baffle
Output Sound Pressure Level	92 dB \pm 2dB (@1.2K, 1.5K, 2K, 2.5KHz)	At 0.5M on Axis, 1W
Distortion	5% max.	At 1KHz 1W
Storage Temperature	-40°C - +60°C	
Operating Temperature	-25°C - +50°C	
Magnet Type	Rare Earth	
Magnet Size	9.5mm dia. X 1.5mm	
Cone Material	Mylar	
Frame Material	Metal	
See Drawing Below		

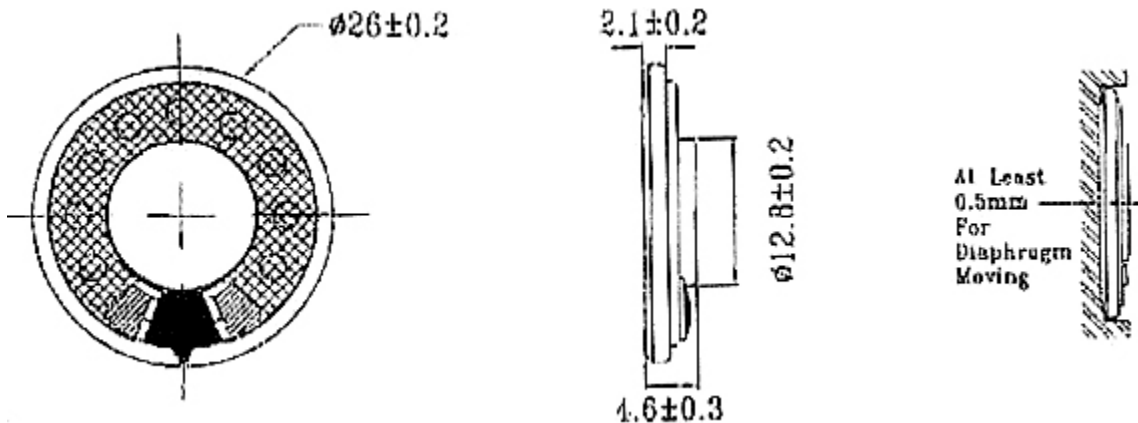

dB SPL/V

Distance Loudsp. Mic.: 10.0 cm 0.1 W.

