



SIEMENS



Siemens Wind Turbine SWT-2.3-108

The new productivity benchmark

www.siemens.com/wind



The industry standard, redefined

The Siemens 2.3-MW family has firmly established itself as the tried and tested workhorse for reliability, with a range of rotor diameters for different wind conditions. Our new SWT-2.3-108 adds a new, larger rotor to the family, setting a new standard for productivity

Greater output from lower wind speeds

Since wind turbine technology was in its infancy, Siemens has been a major driver of innovation. And with its enhanced reliability and productivity in low to moderate wind speeds, the new SWT-2.3-108 is yet another example of the commitment to customers' success.

Longer blades. More energy


In recent years, Siemens created a product line specifically to extract more energy from moderate wind conditions. The SWT-2.3-108's innovative rotor blade design now extends productivity even further. The new 108-meter rotor with its unique blade properties is perfectly optimized for sites with low wind speeds.

Your trusted partner

With its combination of robust and reliable wind turbines, highly efficient solutions for power transmission and distribution and a deep understanding of the entire energy market, Siemens continues to be a leading supplier. Long-lasting customer relationships based on an excellent delivery record provide for a sound, sustainable and profitable investment.

With over 140 years of experience in the energy sector, a strong focus on renewables and a global network of highly skilled and trained employees, Siemens has proven itself to be a trustworthy and reliable business partner. And it will continue to be in the future.

For superior availability, reliability and a lower levelized cost of energy, look no further than the new Siemens SWT-2.3-108 turbine.

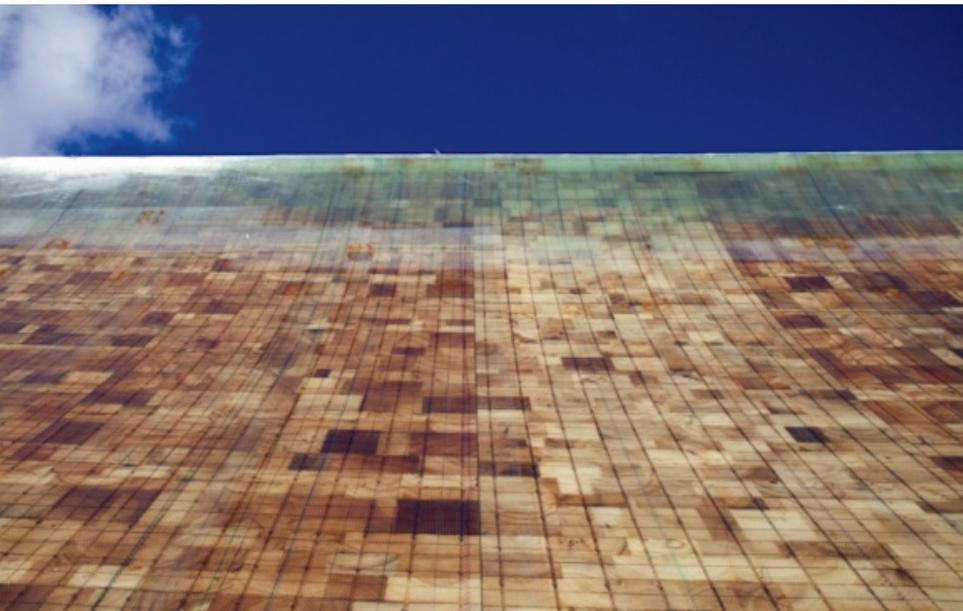

Advanced blade technology allows for longer lifecycles and contributes to lower levelized cost of energy

Superior performance provides higher yields

Optimum energy output at moderate wind conditions

The SWT-2.3-108 wind turbine is designed to increase the energy returns from sites with moderate wind conditions. The advanced blade design, with a rotor diameter of 108 meters and pitch regulation, optimize power output and increase control over energy output.

High availability

Currently, the Siemens fleet of 2.3-MW wind turbines sets the industry standard for availability. The SWT-2.3-108 will build on the reputation for reliability that the market has come to expect from a Siemens wind turbine.

High yield with minimal maintenance

Siemens optimizes the return on investment in its wind turbines through intelligent maintenance that allows high yield with low operational costs.

The rugged structural design, combined with an automatic lubrication system, internal climate control and a generator system without slip rings contributes to exceptional reliability. The innovative design of the SWT-2.3-108 allows for longer service intervals.

Superior grid compliance

The Siemens NetConverter® system is designed for maximum flexibility in the wind turbine's response to voltage and frequency variations, fault ride-through capability and output adjustment. The advanced wind farm control system provides state-of-the-art fleet management.

Proven track record

Siemens has a proven track record of providing reliable wind turbines that last. The company's first commercial turbine was installed in 1980 and still operates today. The world's first offshore wind farm in Vindeby, Denmark, was installed in 1991 and is also still fully operational. In California, Siemens installed over 1,100 units between 1983 and 1990, with 97% still in operation today.

Siemens takes its commitment to reliability seriously and prides itself on the long lifespan that its wind turbines have demonstrated.

Siemens' Turbine Condition Monitoring® system instantly detects deviations from normal operating conditions



No compromise on reliability

SWT-2.3-108: The newest member of an extremely reliable product family

Siemens wind turbines are designed to last. The robust design of the SWT-2.3-108 allows for trouble-free output throughout the complete lifecycle of the machine.

Instead of glueing the blades together from a number of spars and shells, they are cast in a single process. This not only enables both low weight and enormous strength, there are no glue joins which could potentially expose the blades to cracking and lightning damage.

Climate control within the nacelle protects vital equipment from the outside environment. The wind turbine also offers controlled-wear strategies for critical components, which results in a further reduction of maintenance costs.

Safety first

Safety is at the heart of all Siemens' operations. From production to installation, operation and service, Siemens strives to set the standard in safety.

The fail safe capabilities within a wind turbine, combined with Siemens' superior lightning protection system, are designed to enhance security for the turbine.

Advanced operations support

Given the logistical challenges associated with servicing wind farms, Siemens has equipped its turbines with a Turbine Condition Monitoring® system that reduces the need for on-site servicing.

Siemens' Turbine Condition Monitoring® system compares the vibration levels of the main nacelle components with a set of established reference spectra and instantly detects deviations from normal operating conditions. This allows Siemens to proactively plan the service and maintenance of the wind turbines, as any unusual event can be categorized and prioritized based on severity.

Using the knowledge gained from monitoring thousands of wind turbines over the years, Siemens' experts are exceptionally skilled at analyzing and predicting operational anomalies. This allows Siemens to proactively plan service and maintenance activity as each event can be categorized and prioritized based on severity. Siemens can then determine the most appropriate course of action to keep the wind turbine running at its best.

Technical Specifications

SWT-2.3-108

Rotor

| | |
|------------------|--------------------------------------|
| Type | 3-bladed, horizontal axis |
| Position | Upwind |
| Diameter | 108 m |
| Swept area | 9144 m ² |
| Speed range | 6-16 rpm |
| Power regulation | Pitch regulation with variable speed |
| Rotor tilt | 6 degrees |

Blade

| | |
|---------------------|----------------------------|
| Type | Self-supporting |
| Blade length | 53 m |
| Root chord | 3.4 m |
| Aerodynamic profile | NACA63.xxx, FFAxxx, SWPxxx |
| Material | GRE |
| Surface gloss | Semi-gloss, <30 / ISO2813 |
| Surface colour | Light grey, RAL 7035 |

Aerodynamic brake

| | |
|------------|--------------------|
| Type | Full-span pitching |
| Activation | Active, hydraulic |

Load-Supporting Parts

| | |
|-------------------|--------------------------|
| Hub | Nodular cast iron |
| Main bearing | Spherical roller bearing |
| Main shaft | Alloy steel |
| Nacelle bed plate | Steel |

Transmission system

| | |
|---------------------------|---------------------------------------|
| Coupling hub - shaft | Flange |
| Coupling shaft - gearbox | Shrink disc |
| Gearbox type | 3-stage planetary/helical |
| Gearbox ratio | 1:91 |
| Gearbox lubrication | Splash/forced lubrication |
| Oil volume | Approx. 400 l |
| Gearbox oil filtering | Inline and offline |
| Gearbox cooling | Separate oil cooler |
| Gearbox designation | PEAB 4456 (Winergy) or EH851 (Hansen) |
| Coupling gear - generator | Double flexible coupling |

Mechanical brake

| | |
|---------------------|----------------------|
| Type | Hydraulic disc brake |
| Position | High speed shaft |
| Number of callipers | 2 |

Canopy

| | |
|---------------|----------------------------|
| Type | Totally enclosed |
| Material | Steel |
| Surface gloss | Semi-gloss, 25-45, ISO2813 |
| Colour | Light grey, RAL 7035 |

Generator

| | |
|------------------|---------------------------|
| Type | Asynchronous |
| Nominal power | 2,300 kW |
| Protection | IP 54 |
| Cooling | Integrated heat exchanger |
| Insulation class | F |

Grid Terminals (LV)

| | |
|---------------|----------------|
| Nominal power | 2,300 kW |
| Voltage | 690 V |
| Frequency | 50 Hz or 60 Hz |

Yaw system

| | |
|-------------|---|
| Type | Active |
| Yaw bearing | Externally geared slew ring |
| Yaw brake | Passive friction brake |
| Yaw drive | Eight electric gear motors with frequency converter |

Controller

| | |
|-------------------------|-------------------|
| Type | Microprocessor |
| SCADA system | WPS via modem |
| Controller designation | KK WTC 3.0 |
| Controller manufacturer | KK Electronic A/S |

Tower


| | |
|----------------------|------------------------------------|
| Type | Cylindrical and/or tapered tubular |
| Hub height | 80 m or site-specific |
| Corrosion protection | Painted |
| Surface gloss | Semi-gloss, 25-45, ISO2813 |
| Colour | Light grey, RAL 7035 |

Operational data

| | |
|--------------------|------------------------|
| Cut-in wind speed | 3-4 m/s |
| Rated power at | 11-12 m/s |
| Cut-out wind speed | 25 m/s |
| Maximum 3 s gust | 59.5 m/s (IEC version) |


Weights (approximately)

| | |
|---------|-----------|
| Rotor | 60,000 kg |
| Nacelle | 82,000 kg |

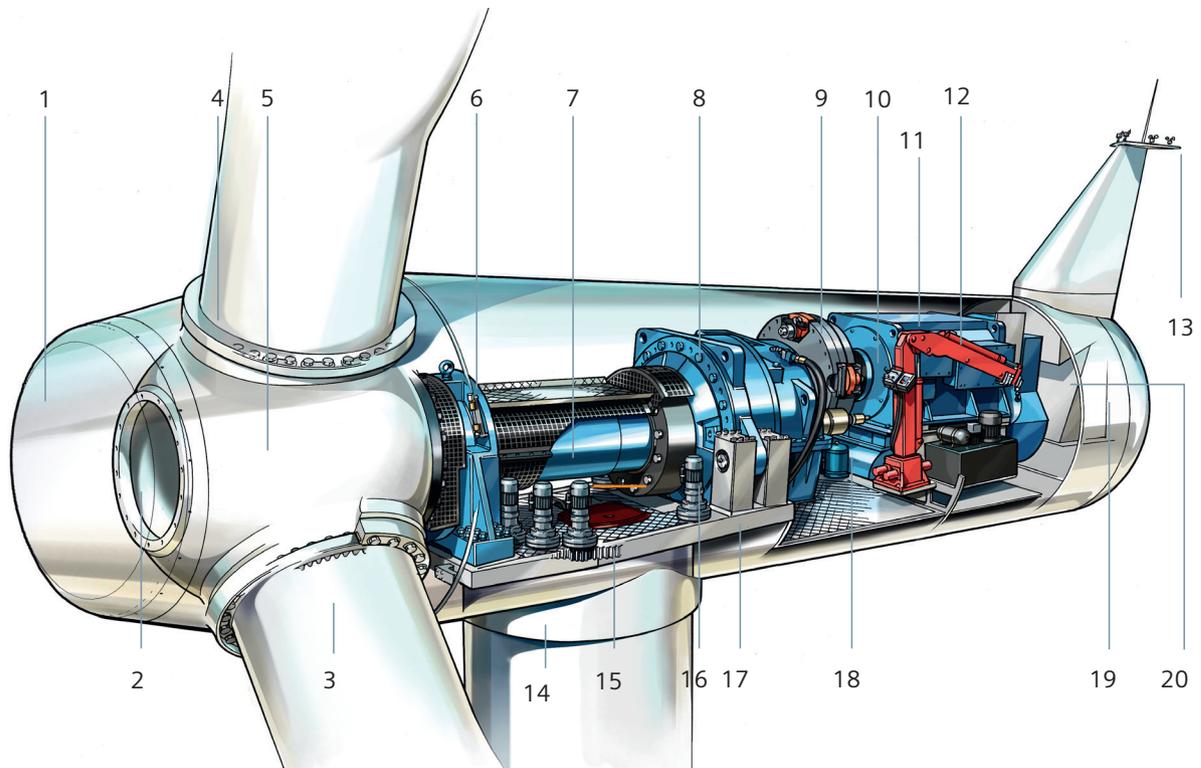

Sales power curve

The calculated power curve data are valid for standard conditions of 15 degrees Celsius air temperature, 1013 hPa air pressure and 1.225 kg/m³ air density, clean rotor blades and horizontal, undisturbed air flow. The calculated curve data are preliminary.

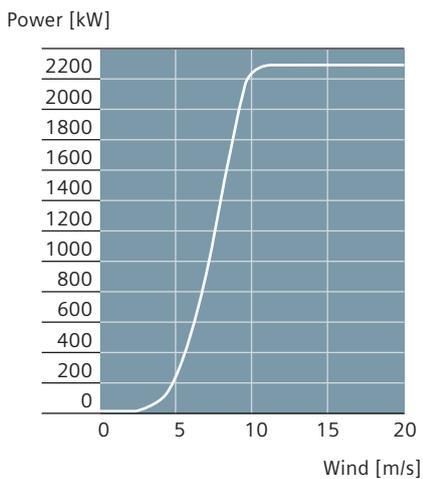

Nacelle arrangement

- | | |
|--------------------|----------------------------|
| 1. Spinner | 11. Generator |
| 2. Spinner bracket | 12. Service crane |
| 3. Blade | 13. Meteorological sensors |
| 4. Pitch bearing | 14. Tower |
| 5. Rotor hub | 15. Yaw ring |
| 6. Main bearing | 16. Yaw gear |
| 7. Main shaft | 17. Nacelle bedplate |
| 8. Gearbox | 18. Oil filter |
| 9. Brake disc | 19. Canopy |
| 10. Coupling | 20. Generator fan |

Published by and copyright © 2011:
Siemens AG
Energy Sector
Freyeslebenstrasse 1
91058 Erlangen, Germany

Siemens Wind Power A/S
Lindenplatz 2
20099 Hamburg, Germany
www.siemens.com/wind

For more information, please contact
our Customer Support Center.
Phone: +49 180 524 70 00
Fax: +49 180 524 24 71
(Charges depending on provider)
E-mail: support.energy@siemens.com

Wind Power Division
E50001-W310-A184-X-4A00

Printed in Germany
Dispo 34804 c4bs No. 7491
MCS 12.11.1
Printed on elementary chlorine-free
bleached paper.

All rights reserved.
Trademarks mentioned in this document
are the property of Siemens AG, its affiliates,
or their respective owners.

Subject to change without prior notice.
The information in this document contains
general descriptions of the technical options
available, which may not apply in all cases.
The required technical options should therefore
be specified in the contract.